MIL-S-19500/219A(EL)
AMENDMENT-6

15 August 1974
SUPERSEDING
AMENDMENT-5
8 February 1972

MILITARY SPECIFICATION

TRANSISTOR, PNP, GERMANIUM, POWER, SWITCHING
TYPES 2N1651, 2N1652, 2N1653

This amendment forms a part of Military Specification MIL-S-19500/219A(EL) dated 2 April 1963.

Page 2,

paragraphs 3.5 and 3.5.1: Delete.

Page 3,

Table 1: Effect the following corrections (of printer's errors) where applicable in particular printed copy of specification on-hand: In Subgroup 3, item 3076, Conditions column, -change "I_C = -25 Vdc" to read "I_C = -25 Adc"; also, in Subgroup 4, item 3251, Conditions column, -change "I_C = -25 Vdc" to read "I_C = -25 Adc". Add reference; see figure 3.

Page 4,

Table II, Subgroup 2, Solderability test: In the Conditions column, establish the following: "Dwell time = 7 $\pm$ 0.5 sec."

Table II, Subgroup 4, item 1046 Salt spray (Corrosion): Replace with the following (in the first two columns, respectively, of the Table):

"1041 Salt Atmosphere (Corrosion)"

Page 5,

Table II, Subgroup 5, Bolting Torque test item 2036 and all associated data: Delete

FSC-5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:44Z
Check the source to verify that this is the current version before use.

Page 5,

Table II. Effect the following corrections (of printer's errors) where applicable in particular printed copy of specification on-hand: In Subgroup 6 End-Point Tests, item 3036, Conditions column, -change "V_{CB} = -60 Adc" to read "V_{CB} = -60 Vdc"; also, in Subgroup 6 End-Point Tests, item 3061, Symbol column, -change "I_{CBO}" to read "I_{EBO}".

Page 6,

paragraph 6.3, last line, attention (symbol) information: change to read as follows:

"AMSEL-PP-EM-2"

Page 9,

Figure 2, lug dimensions; change ".125-.210" to read ".120-.210" and ".072-.120" to read ".060-.120".

Page 10,

Add new figure 3 which becomes new page 10.


Custodian:
Army-EL

Preparing activity:
Army-EL

Project No. 5961-A606

FSC-5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:44Z
Check the source to verify that this is the current version before use.

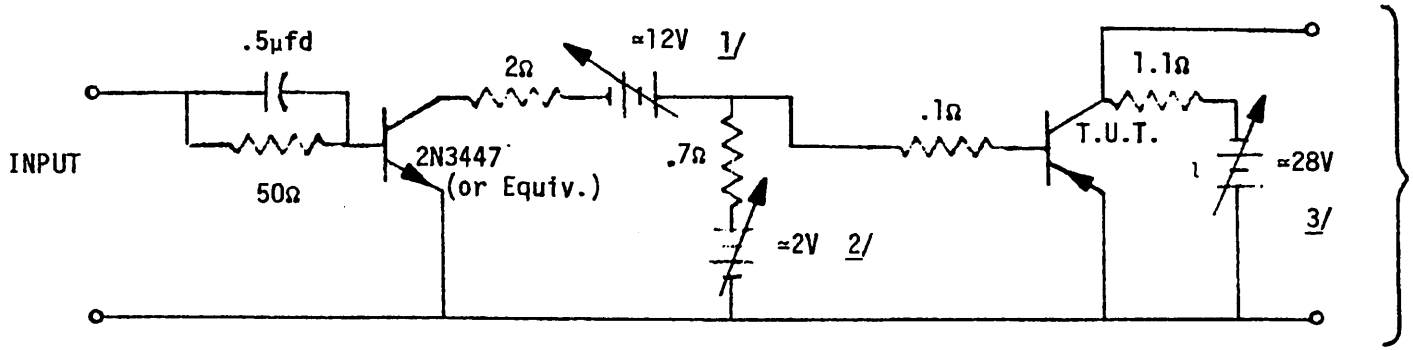

NOTES:
1. Adjust for IB1 = 2.5A
2. Adjust for IB2 = 2.5A
3. Adjust for IC = 25A

INPUT PULSE: Width 50µsec
Duty Cycle 10%

SCOPE: $t_r \leq 20$ nsec
$Z_{in} \geq 1$ megohm
$C_{in} \leq 20$pf

FIGURE 3
PULSE RESPONSE TEST CIRCUIT
JAN 2N1651, 52, 53

Source: https://assist.dla.mil -- Downloaded: 202610-18T13:44Z
Check the source to verify that this is the current version before use.