A-A-1956A
February 23, 1989
SUPERSEDING
A-A-1956
June 15, 1982

COMMERCIAL ITEM DESCRIPTION

LADLE, KITCHEN

The General Services Administration has authorized the use of this commercial item description in preference of Federal Specification RR-L-30, sizes a, b, c, d, e, and h.

This commercial item description covers stainless steel ladles for use in kitchens for serving or transferring food between containers.

Salient characteristics.

The ladles shall be of the following sizes:

Size 1 - 2 ounce (0.059 liter) capacity
Size 2 - 4 ounce (0.118 liter) capacity
Size 3 - 8 ounce (0.236 liter) capacity
Size 4 - 12 ounce (0.355 liter) capacity
Size 5 - 72 ounce (2.129 liter) capacity

The ladles shall be constructed from stainless steel conforming to a type 300 series in accordance with ASTM A 167, Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip. The ladles shall conform to the dimensions shown on figure 1 and table I.

The ladles shall be of one of the following construction methods:

Method 1 - The complete ladle shall be constructed from one piece of stainless steel with no seams.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, General Engineering Group (7FXEG), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2020-10-26T08:18Z
Check the source to verify that this is the current version before use.

Method 2 - The ladle body shall be formed from a single piece of stainless steel. The handle shall be fabricated of stainless steel and spot or fillet welded to the body. When the body and handle are secured by fillet welding, the welding rod shall have the same chemical composition as the welded material. When the handle is spot welded to the body, the weld joint shall be completely sealed with non-toxic solder to prevent food accumulation.

The ladles shall have a No. 3 or smoother finish, as defined in the American Iron and Steel Institute's handbook, Finishes for Stainless Steel, on all surfaces.

The ladles shall be capable of undergoing the handle weight test without separation of the handle or severe deformation.

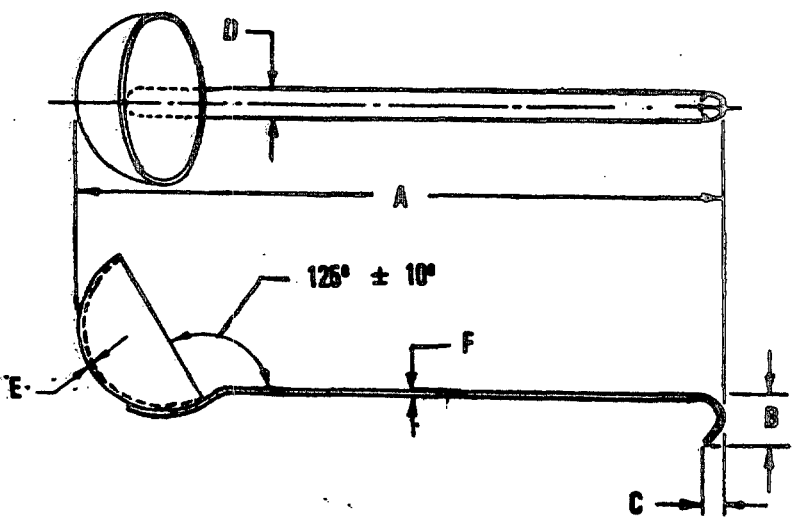


Figure 1

TABLE I. Dimensions

Size	A	B	C	D	Minimum Thickness E - Body	Minimum Thickness F - Handle
1	12 +/- 1	1	5/8	1/2	Ø.Ø312	Ø.Ø781
2	14 +/- 2	1-1/4	5/8	1/2	Ø.Ø312	Ø.Ø781
3	16 +/- 2	1-1/4	5/8	5/8	Ø.Ø312	Ø.Ø781
4	17 +/- 2	1-1/4	5/8	5/8	Ø.Ø4ØØ	Ø.Ø92Ø
5	2Ø +/- 2	1-1/4	5/8	1	Ø.Ø4ØØ	Ø.1Ø94

Note: All dimensions are in inches
Tolerances: B - ± 1/4
C - ∓ 1/2, - 1/8
D - + 3/16, - 1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

NSF compliance - Prior to approval of first shipment, the contractor shall submit to the contracting officer or his authorized representative satisfactory evidence that the items offered meet the applicable requirements of NSF Standard No. 2. Satisfactory evidence of this compliance shall be any of the following:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" and display of the NSF seal on the finished item, or

(2) A certification issued by NSF under this special one-time contract evaluation/certification service, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the contracting officer or authorized representative of the service for which the items are being procured, indicating that the item has been tested and conforms to NSF No. 2.

Workmanship. The finished ladles shall be clean and shall not contain any burrs, slivers, sharp edges, or rough die, corrosion, tool, gouge or grind marks. The finished ladles shall not be fractured, buckled, dented, punctured or otherwise malformed or damaged. Soldered joints shall be as smooth as the metals joined, free of pinholes, cracks, flux deposits or irregularities. There shall be no defects which affect appearance or serviceability.

Quality Assurance:

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations or tests shall be kept complete and available to the Government as specified in the contract or purchase order. The Government reserves the right to perform any of the inspections set forth in the Commercial Item Description where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Inspection of the end item. Sampling shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes. The inspection lot shall consist of all ladles of the same size offered for inspection at one time. The sample unit shall be one ladle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

Visual inspection. The visual examination of the ladles shall be for construction and workmanship defects in accordance with Table II. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in defects per hundred units.

Table II - Classification of Defects

Examine	Defect	Classification Major	Minor
Finish	Not a No. 3 or smoother finish		X
	Evidence of discoloration, rust, pits, or stains	X	
Construction and Workmanship	Any burrs, sharp edges or rough die, tool, gouge, corrosion, or grind marks	X	
	Any component fractured, buckled, dented, punctured, malformed, or damaged	X	
	Any component not fabricated of the specified materials	X	
Welding	Scale and flux deposits not removed		X
	Any evidence of burn holes, fractures, undercuts, weld metal or base metal cracks, incomplete fusion or slag inclusion	X	
Soldering	Pinholes, cracks, flux deposits, roughness, irregularities	X	

Dimensional examination. The ladles shall be examined for compliance with the specified dimensions. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

Inspection for preparation and delivery. An inspection shall be made to determine whether the packaging, packing, and marking comply with the requirements of the contract or purchase order. Examination for defects shall be in accordance with Table III. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery. Sampling shall be in accordance with MIL-STD-105. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

Table III - Preparation for delivery defects

Examine	Defects
Markings	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Material	Any component missing, damaged, or not conforming to applicable requirements stated herein.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, or distortion of container.
Contents	Quantity of container is more or less than required. Gross weight exceeds requirements of the box specification.

Testing of the end item. The end item shall be tested for the applicable characteristic. The inspection lot shall consist of all ladles of the same size offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 6.5 percent, expressed in terms of defects per hundred units.

Handle weight test. The body of the ladle shall be securely clamped so that the handle is in a horizontal position. The weight for each size ladle specified in table IV shall be suspended 1-1/2 inches from the curved end of the handle for not less than 5 minutes. Welded handles shall not separate from the ladle body. The handles of the ladles shall not exhibit permanent deformation in excess of 1/2 inch (measured at the curved end of the handle).

Table IV - Weight for Weld Test

Ladle Size	Weight (pounds)
1	3
2, 3, and 4	5
5	8

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this CID are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

Regulatory requirements. In accordance with Section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing and marking (Civil Agencies). Preservation, packaging, packing, and marking shall be as specified in the contract or purchase order.

Packaging (DoD). Packaging shall be in accordance with ASTM Standard D 3951.

Notes:

National Stock Numbers (NSNs):

Size 1 - 7330-00-254-4793
Size 2 - 7330-00-680-0865
Size 3 - 7330-00-248-1153
Size 4 - 7330-00-685-5330
Size 5 - 7330-00-153-9759

Part Numbering System for Commercial Item Description A-A-1956
Example: AA1956-2 designates a size 2 ladle

AA1956-2
|
|---Size number

Copies of military standards may be obtained from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

Application for copies of American Society for Testing and Materials (ASTM) Standards should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

Copies of American Iron and Steel Institute handbooks are available from the Committee of Stainless Steel Producers, American Iron and Steel Institute, 1000 16th Street, N.W., Washington, DC 20036.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.