[INCH-POUND]
A-A-3050
November 6, 1996

COMMERCIAL ITEM DESCRIPTION

VISE, PIPE, HINGED JAW

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of the type I, class 2, vises specified in GGG-V-415A for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a hinged jaw pipe vise used to hold various sizes of pipe and is capable of being mounted to a tripod stand or bench.

2. CLASSIFICATION.

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The vise shall consist of a base, frame and hook, jaw crosshead, jaws, screw and screw handle, and be similar to Figure 1. All parts having the same manufacturer's number shall be directly and completely interchangeable with each other with respect to installation and performance. Pipe sizes, screw diameters, and weights shall be in accordance with Table I.

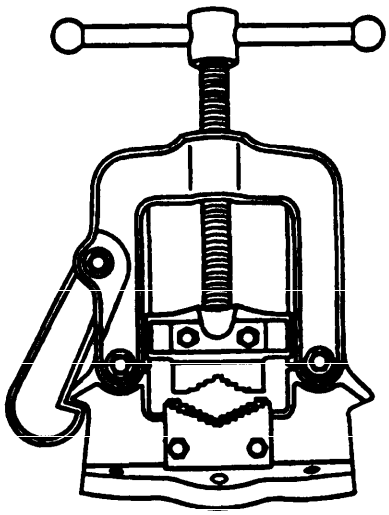


Figure 1. Vise, pipe, hinged jaw.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

TABLE I. Vise, pipe, hinged jaw

Nominal pipe size capacity* (Inches)	Screw diameter (minimum) (Inches)	Weight (minimum) (Pounds)
1/8 to 2-1/2	7/8	10
1/8 to 4-1/2	1	23
1/8 to 6	1-1/8	35
1 to 8	1-1/8	75
1-1/2 to 12	1-3/8	160

* Capacities noted are the minimum and maximum required but are not intended to preclude vises with capacity below the minimum or above the maximum (by not more than 1 inch) provided all other requirements are met.

3.1.1 Base. The base shall be of malleable iron, ductile iron or steel and have at least three mounting holes. The vertical upright section of the base shall be provided with holes for the mounting of the frame and shall have provisions on both sides for automatic engagement of the latch hook. The upright section of the base shall be symmetrical about the vertical centerline to provide for hinging the frame from either the right or left side. The lower jaw mounting shall be so designed as to allow the vise to clamp the minimum pipe-size capacity of the vise.

3.1.2 Frame and hook. The frame and hook shall be of malleable iron, ductile iron or steel and shall be U-shaped. The open ends of the frame shall have mounting bolt holes to align with the bolt holes in the uprights of the base. The closed end shall have an internal threaded hole, compatible with the screw, in the center of the frame, or a means to hold a replaceable nut to engage the vise screw. The latch hook shall be of steel or malleable iron and shall be designed and mounted to automatically lock the frame in the closed position, and one of the legs shall have a hole for mounting the latch hook. The assembled frame shall be so designed as to be reversible in a vertical plane to the base to provide for hinging the frame from either the right or left side of the base. The inside of the frame shall have smooth and parallel ways, free of burrs and fins, to act as guides for the jaw crossheads and shall permit the crosshead to slide freely over the entire length of adjustment without binding.

3.1.3 Jaw crosshead. The jaw crosshead shall be of malleable iron, ductile iron, or steel. The design shall be such that the strength of the crosshead will be adequate for the purpose intended. The top of the crosshead shall provide a means to allow the end of the screw to swivel and be designed to both raise and lower the crosshead by action of the screw.

3.1.4 Jaws. The jaws shall be of steel, heat treated and have a hardness of 52 to 60 on the Rockwell C scale when tested in accordance with ASTM E18. The gripping surface shall be V-shaped or be semicircular in shape and have mill cut, V-shaped teeth. The lower jaw mounting shall be designed to allow the vise to clamp the minimum pipe-size capacity of the vise.

3.1.5 Screw. The vise screw shall be of steel with a minimum of 55,000 pounds per square inch (psi) yield and 65,000 psi tensile strength. The threads on the screw shall be American National, square, acme, modified acme, or buttress. One end of the screw shall have a steel head of adequate size and shall either be an integral part of the screw or welded to the screw in a permanent manner. The head shall be provided with a hole to receive the screw handle. The screw shall engage the full length of the threaded bearing of the body when the jaw is at the maximum opening required for the pipe size capacity of the vise.

3.1.6 Screw handle. The screw handle shall be a straight round steel bar of a diameter comparable to the size of the vise. The screw handle shall slide freely in the hole of the screwhead with a means provided on both ends of the handle to prevent it from sliding out of the screwhead.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.1.7 Coatings. All unmachined surfaces of the component parts shall have an oil coating or shall be given either one coat of baked enamel or lacquer; or one coat of primer and one coat of air-drying enamel or lacquer. In no case shall fillers be used.

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

ASTM E18: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(f) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the vises specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN	SIZE
5120-00-180-0649	1/8 inch to 2-1/2 inch pipe size
5120-00-288-6518	1/8inch to 4-1/2 inch pipe size

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.