INCH-POUND

A-A-52060
January 22, 1990

COMMERCIAL ITEM DESCRIPTION

COLD FOOD COUNTER, DROP-IN, MECHANICALLY REFRIGERATED

The General Services Administration has authorized the use of this commercial item description.

1. CLASSIFICATION

1.1 Classification. This commercial item description covers cold food counters in the following types and sizes (see 5.2):


Type I - Frost top, drop-in

Size 1 - 58 inches long
Size 2 - 73 inches long
Size 3 - 86 inches long

Type II - Food storage pan, drop-in

Size 4 - Four food storage pan capacity
Size 5 - Five food storage pan capacity
Size 6 - Six food storage pan capacity

1.2 Part or identification number (pin). The pin shall consist of the commercial item description number, type number and size number as follows:

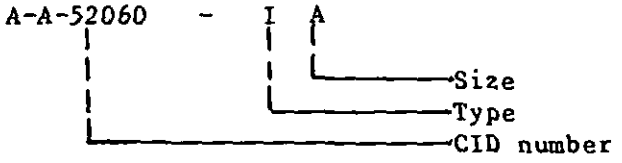

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-ES, Natick, MA 01760-5014

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

2. SALIENT CHARACTERISTICS

2.1 Counter design and construction.

2.1.1 Type I counter. Top surface and the frost top area shall be fabricated of 300 series stainless steel with a thickness of 18 gauge (minimum). The outer housing of the frost top area shall be fabricated of galvanized steel with a thickness of 22 gauge (minimum). The space between the frost top area and the outer housing shall be filled with insulation. The sides shall have a minimum of 1 inch insulation and the bottom shall have a minimum of 1-1/2 inch insulation. A breakerstrip shall be installed to prevent frost transfer to the supporting edge. A vinyl gasket around the full perimeter of the top edge shall be provided to seal the cold food counter when installed. The counter shall be equipped with a frost top area perimeter trough and a minimum 1 inch drain to collect melted condensate. A breath guardextending over the food product area shall be provided.

2.1.1.1 Overall dimensions. The overall dimensions for the type I counter are as follows:

	Length (Inches)	Width (Inches)	Height (Inches) (with refrig. unit)
Size 1	58 ±2	25 ±2	25(max)
Size 2	73 ±2	25 ±2	25(max)
Size 3	86 ±2	25 ±2	25(max)

2.1.2 Type II counter. Top surface and inner well surface shall be fabricated of 300 series stainless steel with a thickness of 18 gauge (minimum). Outer housing of well shall be fabricated of galvanized steel with a thickness of 22 gauge (minimum). The space between the inner and the outer housing shall be filled with insulation. The sides shall have a minimum of 1 inches insulation and the bottom shall have a minimum of 1-1/2 inch of insulation. A breakerstrip shall be installed to prevent frost transfer to the supporting edge. A vinyl gasket around the full perimeter of the top edge shall be provided to seal the cold food counter when installed. The inner well shall be provided with a minimum 1 inch drain. Pan adapters shall be provided to accommodate 12- by 20-inch pans. A breath guard extending over the food product area shall be provided.

2.1.2.1 Overall dimensions. The overall dimensions for the type II counter are as follows:

	Length (Inches)	Width (Inches)	Height (Inches) (with refrig. unit)
Size 4	60	26	30
Size 5	75	26	30
Size 6	88-1/2	26	30

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:05Z
Check the source to verify that this is the currentversion before use.

Note: The inner well shall be sized to accommodate the number of 12- by 20- by 4-inch deep pans specified by the size cold food counter ordered.

2.2 Refrigeration unit design and construction. The refrigeration unit shall be an integral part of the complete cold food counter. The refrigeration unit shall be completely self-contained, precharged, and wired. The Refrigeration unit shall be equipped with an on/off switch and an indicator light which shall remain lighted as long as the switch is in the "on" position and powered. The refrigeration unit shall operate on a 120 volt, 60 Hz, 1-phase electrical system, and shall be provided with an 6-foot, three wire cord. The refrigeration unit shall be provided with a hermetically sealed compressor having the following minimum horsepower and the following maximum wattage for each size:

	Minimum horsepower (hp)	Maximum wattage (walts)
Size 1	1/4	775
Size 2	1/3	1100
Size 3	1/3	1100
Size 4	1/4	775
Size 5	1/3	1100
Size 6	1/3	1100

2.3 Identification marking (Government unique requirement, see 5.4). Each cold food counter shall have the manufacturer's name, contract number, and national stock number embossed or engraved on the outer housing of the cold food counter. Use of "stick-on" or removable labels is prohibited.

2.4 Codes and standards. Cold food counters shall comply with Underwriters Laboratories, Inc. Standard Nos. 207 and 471 and National Sanitation Foundation Standard No. 2.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 End item examination. Sampling inspection shall be in accordance with MIL-STD-105. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0. The sample unit shall be one complete cold food counter. The defects are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

Any component missing
Not fabricated of materials specified
Not constructed as specified
Any burr, sliver, sharp edge, rough die, tool, gauge, trim, or grind marks
Any component fractured, bent, buckled, dented, punctured, or malformed
Fastening devices missing
Welding not smooth and free of cracks, burn holes, or undercuts
Manufacturer's identification marking missing or incomplete
Counter not of size specified

3.3 End item testing. One cold food counter from the production lot shall be tested as specified below. Any test failure shall be cause for rejection of the lot.

3.3.1 Refrigerant leakage test. With the refrigeration system "OFF", the complete refrigeration system shall be tested for leaks with an electronic leak detector. If a leak is found it shall constitute failure of this test.

3.3.2 Operational test.

3.3.2.1 Type I. The refrigeration unit shall be operated in a minimum ambient temperature of 80°F for the period of 1 hour to have the frost top area completely covered with frost. If frost top area is not completely covered with frost in 1 hour, it shall constitute failure of this test.

3.3.2.2 Type II. The refrigeration unit, with the required number of empty food storage pans in place shall be operated in a minimum ambient temperature of 80°F for 30 minutes. After the initial 30 minutes, immediately place 37°F ± 3°F temperature water in the food storage pans to a height of 3/4 of the depth of the pans. Continue to operate the unit for a period of 1 hour. During the 1-hour period, the temperature of the water in each food storage pan shall be checked every 5 minutes to determine that the water temperature remains at 37°F ± 3°F. If the water temperature in the food storage pans does not remain at 37°F ± 3°F, it shall constitute failure of the test.

3.3.3 Electrical usage test.

3.3.3.1 Type I. During the operational of the 3.3.2.1, readings shall be taken every 10 minutes to determine the watts used, and if the wattage exceeds 775 watts for size 1, or 1100 watts for sizes 2 and 3, it shall constitute failure of the test.

3.3.2.2 Type II. During the operational test of 3.3.2.2, readings shall be taken every 10 minutes to determine the watts used, and if the wattage exceeds 775 watts for size 4, or 1100 watts for sizes 5 and 6, it shall constitute failure of the test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:05Z
Check the source to verify that this is the current version before use.

3.4 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this CID are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

3.5 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or as specified (see 5.2).

4.2 Commercial packaging and packing. Each counter shall be cleaned, preserved, packaged, packed, and unitized in accordance with ASTM D 3951.

4.3 Marking. Marking of unit pack, shipping container, and unit load shall be in accordance with ASTM D 3951.

5. NOTES

5.1 Intended use. The counter covered by this commercial item description is intended for use in the serving line of military dining facilities.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type and size required (see 1.1).
c. Type of packaging and packing required (see 4.1)

5.3 Sources of documents.

5.3.1 Sources of nongoverment association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging, is available from:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103

UL Standard Nos. 207 and 471 - Refrigerant Containing Components and Accessories, Nonelectrical and Commercial Refrigerators and Freezers, respectively, are available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

NSF Standard No. 2 - Food Service Equipment, is available from:

National Sanitation Foundation (NSF)
3475 Plymouth Road
P.O. Box 1468
Ann Arbor, MI 48106

5.3.2 Source of governmental documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Government unique requirements. Whenever "(Government unique requirements)" is included in the title of a paragraph under "salient characteristics" it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:

Army - MD, TS
Air Force - 84, 50
DLA- GS

User activities:

Army - CE
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

PREPARING ACTIVITY:

Army - GL

(Project 7310-0777)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.