DOD-STD-35-48A(MI)

31 AUGUST 1987

SUPERSEDING
MIL-STD-35-48(MI)
9 JULY 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

TRANSDUCERS

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Transducers
Automated Engineering
Document Preparation System

DOD-STD-35-48A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-48A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Transducers.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Government Documents	5
	2.1.1	Specifications and Standards	5
	2.2	Other Publications	7
	2.3	Order of Precedence	7
	3.	DEFINITIONS	8
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirement Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of Measure	9
	5.	DETAILED REQUIREMENTS	10
	5.1	Introduction	10
	5.2	MSE Formats	10
	5.3	Referenced Documents	10
	5.4	Tabulation	10
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	12
	5.5.3	DOD-STD-35 Tables	12

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	10

APPENDICES

APPENDIX	A.	Illustrations	100
	B.	Characteristic Code Index	126
		Index	130

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Transducers.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TRANSDUCER, ACCELEROMETER	085011	MIL-A-38307	POTENTIOMETER SENSOR
		MIL-A-22145	ELECTROMAGNETIC SENSOR
		MS25447	COUNTING, ELECTROMAGNETIC SENSOR
TRANSDUCER, ACOUSTIC EMISSION CRYSTAL SENSOR, SONAR	085001	MIL-T-23466	EMISSION, SONAR CRYSTAL
TRANSDUCER, ANGULAR POSITION, STRAIN GAGE SENSOR	085002	MIL-T-83164	ANGULAR STRAIN GAGE SENSOR
TRANSDUCER, DIFFERENTIAL PRESSURE, DIAPHRAGM SENSOR	085009		DIFFERENTIAL PRESSURE SENSOR
TRANSDUCER, FORCE, STRAIN GAGE SENSOR	085003	MIL-T-83164	FORCE, STRAIN GAGE SENSOR
TRANSDUCER, HEAT TRANSFER, THERMOCOUPLE	085004	MIL-T-83164	THERMOCOUPLE, HEAT TRANSFER
TRANSDUCER, LIQUID INTERFACE, CRYSTAL SENSOR	085006	MIL-T-23466	LIQUID INTERFACE CRYSTAL SENSOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TRANSDUCER, LIQUID LEVEL, CRYSTAL SENSOR	085005	MIL-T-23466	LIQUID LEVEL CRYSTAL SENSOR
TRANSDUCER, PRESSURE, BELLOWS SENSOR, GASES OR LIQUIDS	085007	MIL-P-82459	BELLOWS SENSOR GASES OR LIQUID
TRANSDUCER, PRESSURE, DIAPHRAGM, SENSOR GASES OR LIQUIDS	085008	MIL-P-82459	DIAPHRAGM SENSOR GASES OR LIQUID
TRANSDUCER, PRESSURE, STRAIN GAGE SENSOR	085012	MIL-T-83164	PRESSURE SENSOR STRAIN GAGE
TRANSDUCER, PRESSURE, STRAIN GAGE SENSOR, PNEUMATIC	085010	MIL-T-83164	PRESSURE SENSOR PNEUMATIC
TRANSDUCER, PRESSURE SEALED, AMPLIFIED	085019	MIL-T-83164	PRESSURE SEALED AMPLIFIED
TRANSDUCER, SHAFT ROTATION, ELECTROMAGNETIC SENSOR	085013	MIL-A-22145	ELECTROMAGNETIC SENSOR
TRANSDUCER, SHOCK AND VIBRATION	085014	MIL-A-38307	SHOCK AND VIBRATION
TRANSDUCER, SHOCK AND VIBRATION, CRYSTAL SENSOR	085015	MIL-T-23466	SHOCK AND VIBRATION CRYSTAL SENSOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TRANSDUCER, TORQUE, SHAFT ROTATION, STRAIN GAGE SENSOR	085016	MIL-T-83164	TORQUE STRAIN GAGE SENSOR
TRANSDUCER , TRIAXIAL VIBRATION, CRYSTAL SENSOR	085017	MIL-T-23466	TRIAXIAL VIBRATION SENSOR
TRANSDUCER , WEIGHT, STRAIN GAGE SENSOR	085018	MIL-T-83164	WEIGHT STRAIN GAGE SENSOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-915	Cable and Cord, Electrical, for Shipboard Use, General Specification for
MIL-C-5015	Connectors, Electrical, Circular Threaded, AN Type, General Specification for
MIL-P-5315	Packing, Preformed, Hydrocarbon Fuel Resistant
MIL-P-5510	Packing, Preformed, Straight Thread Tube Fitting Boss, Type I Hydraulic
MIL-P-5516	Packing, Preformed, Petroleum Hydraulic Fluid Resistant
MIL-I-6181	Interference Control Requirements, Aircraft Equipment
MIL-A-22145	Accelerometer Group, Counting Type Designation MS25447 and MS25448
MIL-T-23466	Transducer, Sonar, for Use with Sonar Test AN/UQM-l
MIL-C-26500	Connectors, General Purpose, Electrical, Miniature, Circular, Environment Resistant, General Specification for
MIL-A-38307	Accelerometer, Aircraft

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:57Z
Check the source to verify that this is the currentversion before use.

MIL-P-82459	Pressure Transducer
MIL-T-83164	Transducer Assembly, Aircraft
MS3102	Connector, Receptacle, Electric, Box Mounting, Solder Contacts, AN Type
MS24264	Connector, Receptacle, Electric, Flange Mount, Miniature
MS33649	Bosses, Fluid Connection-Internal Striaght Thread

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electrical and Electrical Component Parts
MIL-STD-461	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
MIL-STD-462	Electromagnetic Interference Characteristics, Measurements of
MIL-STD-810	Environmental Test Methods and Engineering Guidelines

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

2.2 Other Publications. The following documents form **a** part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Transducers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Transducers, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Transducers.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Transducers.

4.3.2 Illustrations. Illustrations, applicable to Transducers, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Transducers characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7022	WEIGHT MAX OUNCE(S)	7023	WEIGHT MAX POUND(S)	7021	WEIGHT MAX GRAM(S)
7024	WEIGHT MAX KILOGRAMS	1712	RESONANT FREQUENCY HERTZ	1881	INPUT VOLTAGE DC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1886	INPUT VOLTAGE AC	1890	INPUT CURRENT MILLIAMPS	1893	INPUT FREQUENCY HERTZ
1901	OUTPUT VOLTAGE DC	1906	OUTPUT VOLTAGE AC	1909	OUTPUT ELECTRICAL LOAD OHMS
1914	OUTPUT CURRENT MILLIAMPS				

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

(THIS PAGE INTENTIONALLY LEFT BLANK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE .	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE .

SCOPE . THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
(INCHES)	7572
(MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ELECTRICAL CONNECTOR	
PART NUMBER (NUMBER)	1578
PER (DOC DES)	1580
ELECTRICAL EXCITATION (INPUT)	
INPUT VOLTAGE (SELECT ONE)	
(VOLTS DC)	1881
(VOLTS RMS)	1886

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE . (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1578	ELECTRICAL CONNECTOR. THE ELECTRICAL CONNECTOR PART NUMBER SHALL BE 1578.
1580	THE ELECTRICAL CONNECTOR SHALL BE IN ACCORDANCE WITH 1580.
	ELECTRICAL EXCITATION (INPUT). ELECTRICAL EXCITATION SHALL BE AS FOLLOWS:
1881	INPUT VOLTAGE SHALL BE 1881 VOLT(S) D.C.
1886	INPUT VOLTAGE SHALL BE 1886 VOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL DESIGNATION	
PLUS TERMINAL (DES)	1884
MINUS TERMINAL (DES)	1885
CURRENT (MILLIAMPERES RMS)	1890
FREQUENCY (HERTZ)	1893
ELECTRICAL OUTPUT SIGNAL	
OUTPUT VOLTAGE (SELECT ONE)	
(VOLTS DC)	1901
(VOLTS RMS)	1906
TERMINAL DESIGNATION	
PLUS TERMINAL (DES)	1904
MINUS TERMINAL (DES)	1905
ELECTRICAL LOAD (OHMS)	1909
CURRENT (MILLIAMPERES RMS)	1914
ELECTRICAL PICKUP TYPE (SELECT ONE)	
CAPACITIVE.	1630
ELECTROSTATIC.	1631
ELECTROSTRICTIVE.	1632

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1884	THE PLUS TERMINAL SHALL BE 1884.
1885	THE MINUS TERMINAL SHALL BE 1885.
1890	INPUT CURRENT SHALL BE 1890 MILLIAMPERE(S) RMS.
1893	INPUT FREQUENCY SHALL BE 1893 HERTZ.
	ELECTRICAL OUTPUT SIGNAL. THE ELECTRICAL OUTPUT SIGNAL SHALL BE AS FOLLOWS:
1901	OUTPUT VOLTAGE SHALL BE 1901 VOLT(S) D.C.
1906	OUTPUT VOLTAGE SHALL BE 1906 VOLT(S) RMS.
1904	THE PLUS TERMINAL SHALL BE 1904.
1905	THE MINUS TERMINAL SHALL BE 1905.
1909	ELECTRICAL LOAD SHALL BE 1909 OHM(S).
1914	CURRENT SHALL BE 1914 MILLIAMPERE(S) RMS.
1630	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE CAPACITIVE TYPE.
1631	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE ELECTROSTATIC TYPE.
1632	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE ELECTROSTRICTIVE TYPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INDUCTIVE.	1633
MAGNETOSTRICTIVE.	1634
ELECTRO-OPTIC.	1635
PIEZOELECTRIC.	1636
RESISTIVE.	1637
RELUCTANCE.	1638
TRANSISTOR.	1639
FITTING OR PORT (MEDIA INPUT)	
PER (DOC DES)	1600
SIZE (DES)	1602
THREAD (DES)	1604
MEDIA SENSING ELEMENT (SELECT ONE)	
BELLOWS.	1610
BOURDON SPIRAL.	1611
BOURDON TUBE.	1612

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1633	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE INDUCTIVE TYPE.
1634	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE MAGNETOSTRICTIVE TYPE.
1635	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE ELECTRO-OPTIC TYPE.
1636	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE PIEZOELECTRIC TYPE.
1637	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE RESISTIVE TYPE.
1638	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE RELUCTANCE TYPE.
1639	ELECTRICAL PICKUP. ELECTRICAL PICKUPS SHALL BE OF THE TRANSISTOR TYPE.
1600	FITTING OR PORT (MEDIA INPUT). THE INPUT FITTING OR PORT SHALL BE IN ACCORDANCE WITH 1600.
1602	SIZE SHALL BE 1602.
1604	THE THREAD SHALL BE 1604.
1610	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A BELLOWS TYPE.
1611	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A BOURDON SPIRAL TYPE.
1612	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A BOURDON TUBE TYPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CRYSTAL.	1613
DIAPHRAGM.	1614
BIMETALLIC STRIP.	1615
THERMOCOUPLE.	1616
ACOUSTIC-MICROPHONE.	1617
ACOUSTIC-SONAR.	1618
GEIGER COUNTER.	1619
POLAROGRAPH.	1620
MOUNTING FLANGE SEAL	
PART NUMBER (DES)	1590
PER (DOC DES)	1592
MOUNTING POSITION AS FOLLOWS: (SELECT ONE)	
ANY POSITION.	1652
HORIZONTAL PLANE.	1654
VERTICAL PLANE.	1656

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1613	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A CRYSTAL TYPE.
1614	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A DIAPHRAGM TYPE.
1615	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A BIMETALLIC STRIP TYPE.
1616	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A THERMOCOUPLE TYPE.
1617	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE AN ACOUSTIC-MICROPHONE TYPE.
1618	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE AN ACOUSTIC-SONAR TYPE.
1619	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A GEIGER COUNTER TYPE.
1620	MEDIA SENSING ELEMENT. THE SENSING ELEMENT SHALL BE A POLAROGRAPH TYPE.
1590	MOUNTING FLANGE SEAL. THE MOUNTING FLANGE SEAL SHALL BE PART NUMBER 1590.
1592	THE MOUNTING FLANGE SEAL SHALL BE IN ACCORDANCE WITH 1592.
	MOUNTING POSITION. TRANSDUCER MOUNTING POSITION SHALL BE AS FOLLOWS:
1652	THE TRANSDUCER SHALL BE MOUNTED IN ANY POSITION.
1654	THE TRANSDUCER SHALL BE MOUNTED ON THE HORIZONTAL PLANE.
1656	THE TRANSDUCER SHALL BE MOUNTED ON THE VERTICAL PLANE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NATURAL MECHANICAL (RESONANT) FREQUENCY	
FREQUENCY (HERTZ)	1712
OUTPUT IMPEDANCE (OHMS)	1919
VOLUMETRIC DISPLACEMENT (SELECT ONE)	
(CUBIC INCHES)	1662
(CUBIC CENTIMETERS)	1664
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAM)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1712	NATURAL MECHANICAL (RESONANT) FREQUENCY. NOMINAL NATURAL MECHANICAL (RESONANT) FREQUENCY OF THE TRANSDUCER SHALL BE 1712 HERTZ.
1919	OUTPUT IMPEDANCE. OUTPUT IMPEDANCE SHALL BE NOT GREATER THAN 1919 OHM(S).
1662	VOLUMETRIC DISPLACEMENT. VOLUME INCREASE AT FULL RANGE PRESSURE SHALL BE NOT GREATER THAN 1662 CUBIC INCH(S).
1664	VOLUMETRIC DISPLACEMENT. VOLUME INCREASE AT FULL RANGE PRESSURE SHALL BE NOT GREATER THAN 1664 CUBIC CENTIMETER(S).
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
MAXIMUM HYSTERESIS (PERCENT OF FULL SCALE OUTPUT)	2550
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2550	THE HYSTERESIS AFTER TESTING SHALL BE NOT GREATER THAN 2550 PERCENT OF FULL SCALE OUTPUT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S,
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT BY DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER MIL-STD-202, METHOD 310	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDITION (LETTER)	1549
BURST PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2342
NO CRACKS OR RUPTURE.	2344

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY .
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
2342	BURST PRESSURE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2342.
2344	BURST PRESSURE. THE TRANSDUCER SHALL SHOW NO EVIDENCE OF CRACKS OR RUPTURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2312
PER (DOC DES)	2314
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2316
(PASCALS)	2554
TEST TEMPERATURE (DEGREES CELSIUS)	2322
TEST MEDIA (DES)	2328
PER (DOC DES)	2330
TEST MEDIAA TEMPERATURE (DEGREES CELSIUS)	2334
TEST DURATION (MINUTES)	2332
CALIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2182
AS FOLLOWS:	2556
PLUS DEVIATION (PERCENT)	2184
MINUS DEVIATION (PERCENT)	2185

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2312	BURST PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2312.
2314	BURST PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2314.
2316	TEST PRESSURE SHALL BE 2316 POUNDS PER SQUARE INCH GAUGE .
2554	TEST PRESSURE SHALL BE 2554 PASCAL(S).
2322	TEST SPECIMEN TEMPERATURE SHALL BE 2322 DEGREE(S) CELSIUS.
2328	TEST MEDIA SHALL BE 2328.
2330	TEST MEDIA SHALL BE IN ACCORDANCE WITH 2330.
2334	TEST MEDIA TEMPERATURE SHALL BE 2334 DEGREE(S) CELSIUS.
2332	TEST PRESSURE SHALL BE HELD FOR A PERIOD OF 2332 MINUTE(S).
2182	CALIBRATION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2182.
2556	CALIBRATION. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2184	PLUS DEVIATION FROM THE THEORETICAL OR NOMINAL READING SHALL BE NOT GREATER THAN 2184 PERCENT.
2185	MINUS DEVIATION FROM THE THEORETICAL OR NOMINAL READING SHALL BE NOT GREATER THAN 2185 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2162
PER (DOC DES)	2164
FREQUENCY RANGE	
MINIMUM (HERTZ)	2167
MAXIMUM (HERTZ)	2168
MEASUREMENT INCREMENTS (PERCENT OF RANGE)	2169
DC RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2082
RESISTANCE (OHMS)	2084
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2062
PER MIL-STD-202, METHOD 3030	2061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2162	CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2162.
2164	CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2164.
2167	FREQUENCY RANGE SHALL BE NOT LESS THAN 2167 HERTZ.
2168	FREQUENCY RANGE SHALL BE NOT GREATER THAN 2168 HERTZ.
2169	SIZE OF THE MEASUREMENT INCREMENTS SHALL BE NOT GREATER THAN 2169 PERCENT OF THE MAXIMUM OPERATING RANGE.
2082	DC RESISTANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2084	DC RESISTANCE. NOMINAL DC RESISTANCE SHALL BE 2084 OHM(S).
2062	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2062.
2061	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST VOLTAGE (VOLTS DC)	2063
TEST CURRENT (MILLIAMPERES)	2064
MEASUREMENT ERROR (PERCENT)	2066
TEST VOLTAGE DURATION (SECONDS)	2070
MEASUREMENT POINTS (TERMINALS)	2072
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE ARCING, OR INSULATION BREAKDOWN.	4906
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2063	TEST VOLTAGE SHALL BE 2063 VOLT(S) DC.
2064	TEST CURRENT SHALL BE 2064 MILLIAMPERE(S).
2066	ERROR OF MEASURING APPARATUS SHALL BE NOT GREATER THAN 2066 PERCENT.
2070	PERIOD OF UNINTERRUPTED TEST VOLTAGE APPLICATION SHALL BE 2070 SECOND(S).
2072	MEASUREMENTS SHALL BE TAKEN BETWEEN TERMINALS 2072.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*ALTITUDE PER MIL-STD-202, METHOD 105	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLT(S), DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLT(S), AC.
	POINTS OF APPLICATION OF TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERE)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S) .
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLT(S), DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLT(S), AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POINTS OF VOLTAGE APPLICATION	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (EMI)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2362
AS FOLLOWS:	2566
GENERATION LIMITS PER (DOC DES)	2364
SUSCEPTIBILITY LIMITS PER (DOC DES)	2368
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2352
PER (DOC DES)	2354
EQUIPMENT CLASS (DES)	2356
TEST METH0D (NUMBER)	2358
EXPLOSION PROOF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2392
NO EXPLOSION.	2394

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:57Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2362	ELECTROMAGNETIC INTERFERENCE (EMI). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.
2566	ELECTROMAGNETIC INTERFERENCE (EMI). REQUIREMENT(S) SHALL BE AS FOLLOWS:
2364	EMI GENERATION SHALL BE WITHIN THE LIMITS SPECIFIED IN 2364.
2368	EMI SUSCEPTIBILITY SHALL BE WITHIN THE LIMITS SPECIFIED IN 2368.
2352	ELECTROMAGNETIC INTERFERENCE (EMI). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2354	ELECTROMAGNETIC INTERFERENCE (EMI). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2354.
2356	EQUIPMENT SHALL BE CLASS 2356.
2358	TEST METHOD SHALL BE NUMBER 2358
2392	EXPLOSION PROOF. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2392.
2394	EXPLOSION PROOF. THE TRANSDUCER SHALL BE CAPABLE OF OPERATION IN THE PRESENCE OF A MIXTURE OF EXPLOSIVE-GASES AND AIR WITHOUT CAUSING AN EXPLOSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2382
PER MIL-STD-202, METHOD 109.	2384
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2386
APPLY RATED VOLTS.	2388
FILLING MEDIUM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1680
AS FOLLOWS:	2568
FILLING MEDIUM	
HELIUM (PERCENT)	1681
NITROGEN (PERCENT)	1682
IMPURITIES ALLOWED (PERCENT)	1685
WATER CONTENT (SELECT ONE)	
(MILLIGRAMS PER GALLON)	2570
(MILLIGRAMs PER LITER)	1686
FILLING PRESSURE (SELECT ONE)	
(PSIA)	1687
(PASCALS)	2572

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2382	EXPLOSION PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2382.
2384	EXPLOSION PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109 OF MIL-STD-202.
2386	CHAMBER TEMPERATURE SHALL BE 2386 DEGREE(S) CELSIUS.
2388	TRANSDUCERS SHALL HAVE THE RATED VOLTS APPLIED.
1680	FILLING MEDIUM. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1680.
2568	FILLING MEDIUM. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1681	FILLING MEDIUM SHALL BE 1681 PERCENT HELIUM.
1682	FILLING MEDIUM SHALL BE 1682 PERCENT NITROGEN.
1685	INPURITIES SHALL BE NOT GREATER THAN 1685 PERCENT.
2570	WATER CONTENT AT THE FILLING PRESSURE SHALL BE NOT GREATER THAN 2570 MILLIGRAM(S) PER GALLON.
1686	WATER CONTENT AT THE FILLING PRESSURE SHALL BE NOT GREATER THAN 1686 MILLIGRAM(S) PER LITER.
1687	FILLING PRESSURE SHALL BE 1687 POUNDS PER SQUARE INCH ABSOLUTE.
2572	FILLING PRESSURE SHALL BE 2572 PASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FILLING MEDIUM TEMPERATURE (DEGREES CELSIUS)	1692
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1672
SUPPLIERS CERTIFICATION.	1674
HOTRIZONTAL RESPONSE (SONAR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2005
AS FOLLOWS:	2574
BEAM PATTERN (SELECT ONE)	
OMNI-DIRECTIONAL.	2006
UNI-DIRECTIONAL.	2007
DEPARTURE FROM AVERAGE VALUE	
PLUS (DB)	2008
MINUS (DB)	2009

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1692	TEMPERATURE OF THE FILLING MEDIUM SHALL BE 1692 DEGREE(S) CELSIUS.
1672	FILLING MEDIUM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1672.
1674	FILLING MEDIUM. THE SUPPLIER SHALL CERTIFY THAT THE FILLING MEDIUM IS IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED.
2005	HORIZONTAL RESPONSE (SONAR). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2005.
2574	HORIZONTAL RESPONSE (SONAR). REQUIREMENT(S) SHALL BE AS FOLLOWS:
2006	HORIZONTAL BEAM PATTERN SHALL BE OMNI-DIRECTIONAL.
2007	HORIZONTAL BEAM PATTERN SHALL BE UNI-DIRECTIONAL.
2008	DEPARTURE FROM AN AVERAGE VALUE CIRCLE, WITHOUT THE PROTECTIVE GRILL OR SHROUD, SHALL BE NOT GREATER THAN PLUS 2008 DB.
2009	DEPARTURE FROM AN AVERAGE VALUE CIRCLE, WITHOUT THE PROTECTIVE GRILL OR SHROUD, SHALL BE NOT LESS THAN MINUS 2009 DB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2001
SUPPLIER CERTIFICATION.	2002
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2001	HORIZONTAL RESPONSE (SONAR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2001.
2002	HORIZONTAL RESPONSE (SONAR). THE SUPPLIER SHALL CERTIFY THAT THE SONAR HORIZONTAL RESPONSE OF THE TRANSDUCER SHALL MEET THE REQUIREMENT(S) SPECIFIED.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE TEST IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND .	6202

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLT(S), DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
HYDROSTATIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2222
NO EVIDENCE OF DAMAGE.	2224
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2192
PER MIL-T-23468.	2194
PER MIL-T-82459.	2196
TEST PRESSURE (SELECT ONE)	
(PSIG)	2198
(PASCALS)	2582

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
2222	HYDROSTATIC PRESSURE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.
2224	HYDROSTATIC PRESSURE. THE TRANSDUCER SHALL SHOW NO EVIDENCE OF DAMAGE THAT WILL ADVERSELY AFFECT FORM, FIT, OR FUNCTION.
2192	HYDROSTATIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.
2194	HYDROSTATIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23468.
2196	HYDROSTATIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-82459.
2198	TEST PRESSURE SHALL BE 2198 POUNDS PER SQUARE INCH GAUGE .
2582	TEST PRESSURE SHALL BE 2582 PASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST SPECIMEN TEMPERATURE (DEGREES CELSIUS)	2204
TEST MEDIA (DES)	2210
PER (DOC DES)	2212
TEST DURATION (MINUTES)	2214
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2215
HYSTERESIS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
FULL SCALE OUTPUT DIFFERENCE (PERCENT)	2054
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2042
PER (DOC DES)	2043
TEST MEASUREMENT INCREMENTS (PERCENT)	2044
TIME ELAPSED BETWEEN READINGS (MINUTES)	2046

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2204	NOMINAL TEST SPECIMEN TEMPERATURE SHALL BE 2204 DEGREE(S) CELSIUS.
2210	TEST MEDIA SHALL BE 2210.
2212	TEST MEDIA SHALL BE IN ACCORDANCE WITH 2212.
2214	TEST PRESSURE HOLDING DURATION SHALL BE 2214 MINUTE(S).
2215	TEST MEDIA TEMPERATURE SHALL BE 2215 DEGREE(S) CELSIUS.
2052	HYSTERESIS. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
2054	HYSTERESIS. THE DIFFERENCE IN FULL SCALE OUTPUT SHALL BE NOT GREATER THAN 2054 PERCENT OF THE LARGER OF THE TWO READINGS.
2042	HYSTERESIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2042.
2043	HYSTERESIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2043.
2044	SIZE OF TEST MEASUREMENT INCREMENTS SHALL BE 2044 PERCENT OF MAXIMUM OPERATING RANGE.
2046	TIME ELAPSED BETWEEN ANY TWO ASCENDING AND DESCENDING READINGS SHALL BE NOT GREATER THAN 2046 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INPUT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2102
IMPEDANCE (OHMS)	2104
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2092
AS FOLLOWS:	2584
TEST VOLTAGE (VOLTS RMS)	2094
TEST FREQUENCY (HERTZ)	2096
POINTS OF MEASUREMENT (TERMINALS)	2099
LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2512
AS FOLLOWS:	2586
MAXIMUM LEAKAGE (SELECT ONE)	
(CUBIC INCHES PER MINUTE)	2588

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2102	INPUT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2102.
2104	INPUT IMPEDANCE. INPUT IMPEDANCE SHALL BE 2104 OHM(S).
2092	INPUT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2584	INPUT IMPEDANCE. TESTING SHALL BE PERFORMED AS FOLLOWS:
2094	TEST VOLTAGE SHALL BE 2094 VOLT(S) RMS.
2096	TEST FREQUENCY SHALL BE 2096 HERTZ.
2099	MEASUREMENTS SHALL BE TAKEN BETWEEN TERMINALS 2099.
2512	LEAKAGE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2512.
2586	LEAKAGE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2588	LEAKAGE SHALL BE NOT GREATER THAN 2588 CUBIC INCH(S) PER MINUTE .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(CUBIC CENTIMETERS PER MINUTE)	2514
(CUBIC INCHES PER SECOND)	2590
(CUBIC CENTIMETERS PER SECOND)	2516
MAXIMUM CHANGE MANOMETER LEVEL (SELECT ONE)	
(INCHES OF MERCURY PER MINUTE)	2518
(CENTIMETERS OF MERCURY PER MINUTE)	2592
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2472
PER (DOC DES)	2474
TEST PRESSURE (SELECT ONE)	
(PSIG)	2476
(PASCALS)	2594
(INCHES OF MERCURY)	2482
(MILLIMETERS OF MERCURY)	2596
TEST TEMPERATURE (DEGREES CELSIUS)	2488

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2514	LEAKAGE SHALL BE NOT GREATER THAN 2514 CUBIC CENTIMETER(S) PER MINUTE.
2590	LEAKAGE SHALL BE NOT GREATER THAN 2590 CUBIC INCH(S) PER SECOND .
2516	LEAKAGE SHALL BE NOT GREATER THAN 2516 CUBIC CENTIMETER(S) PER SECOND.
2518	CHANGE IN THE MANOMETER LEVEL SHALL BE NOT GREATER THAN 2518 INCH(S) OF MERCURY PER MINUTE.
2592	CHANGE IN THE MANOMETER LEVEL SHALL BE NOT GREATER THAN 2592 CENTIMETER(S) OF MERCURY PER MINUTE.
2472	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2472.
2474	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2474.
2476	TEST PRESSURE SHALL BE 2476 POUNDS PER SQUARE INCH GAUGE .
2594	TEST PRESSURE SHALL BE 2594 PASCAL(S).
2482	TEST PRESSURE SHALL BE 2482 INCHES OF MERCURY.
2596	TEST PRESSURE SHALL BE 2596 MILLIMETER(S) OF MERCURY.
2488	TEST SPECIMEN TEMPERATURE SHALL BE 2488 DEGREE(S) CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST MEDIA (DES)	2494
TEST MEDIA PER (DOC DES)	2496
TEST PRESSURE DURATION (MINUTES)	2498
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2500
LINEARITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2032
DEVIATION OF FULL-SCALE OUTPUT (PERCENT)	2034
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
MEASUREMENT INCREMENTS (PERCENT OPERATING RANGE)	2026
PROOF PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1938
NO EVIDENCE OF DAMAGE.	1939

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2494	TEST MEDIA SHALL BE 2494.
2496	TEST MEDIA SHALL BE IN ACCORDANCE WITH 2496.
2498	DURATION OF THE PRESSURE TEST SHALL BE 2498 MINUTE(S).
2500	TEST MEDIA TEMPERATURE SHALL BE 2500 DEGREE(S) CELSIUS.

2032	LINEARITY, REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2032.
2034	LINEARITY. DEVIATION SHALL BE NOT GREATER THAN 2034 PERCENT OF FULL-SCALE OUTPUT.

2022	LINEARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
2026	LINEARITY. MEASUREMENT INCREMENTS SHALL BE 2026 PERCENT OF MAXIMUM OPERATING RANGE.

1938	PROOF PRESSURE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1938.
1939	PROOF PRESSURE. THERE SHALL BE NO EVIDENCE OF DAMAGE WHICH WILL AFFECT FORM, FIT, OR FUNCTION.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1921
PER (DOC DES)	1922
TEST PRESSURE (SELECT ONE)	
(PSIA)	1923
(PASCALS)	2598
TEST SPECIMEN TEMPERATURE (DEGREES CELSIUS)	1928
TEST MEDIA (DES)	1931
PER (DOC DES)	1932
TEST PRESSURE DURATION (MINUTES)	1933
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1934
REDUCED PRESSURE (VACUUM)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2262
NO EVIDENCE OF DAMAGE.	2264

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1921	PROOF PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1921.
1922	PROOF PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1922.
1923	TEST PRESSURE SHALL BE 1923 POUNDS PER SQUARE INCH ABSOLUTE.
2598	TEST PRESSURE SHALL BE 2598 PASCAL(S).
1928	TEST SPECIMEN TEMPERATURE SHALL BE 1928 DEGREE(S) CELSIUS.
1931	TEST MEDIA SHALL BE 1931.
1932	TEST MEDIA SHALL BE IN ACCORDANCE WITH 1932.
1933	TEST PRESSURE DURATION SHALL BE 1933 MINUTE(S).
1934	TEST MEDIA TEMPERATURE SHALL BE 1934 DEGREE(S) CELSIUS.
2262	REDUCED PRESSURE (VACUUM). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2262.
2264	REDUCED PRESSURE (VACUUM). THE TRANSDUCER SHALL SHOW NO EVIDENCE OF DAMAGE THAT WILL ADVERSELY AFFECT FORM, FIT, OR FUNCTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2232
PER (DOC DES)	2234
TEST PRESSURE (SELECT ONE)	
(TORR)	2236
(PASCALS)	2600
TEST CONDITION (LETTER)	2242
MOUNTING METHOD (SELECT ONE)	
ANY SUITABLE METHOD.	2244
NORMAL METHOD.	2246
TEST PRESSURE DURATION (MINUTES)	2248
REPEATABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2126
REPEATABILITY (PERCENT OF FULL SCALE OUTPUT)	2127

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2232	REDUCED PRESSURE (VACUUM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2232.
2234	REDUCED PRESSURE (VACUUM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2234.
2236	TEST PRESSURE SHALL BE 2236 TORR.
2600	TEST PRESSURE SHALL BE 2600 PASCAL(S).
2242	TEST CONDITION LETTER 2242 SHALL APPLY.
2244	METHOD OF MOUNTING THE TEST SPECIMEN SHALL BE ANY SUITABLE METHOD .
2246	METHOD OF MOUNTING THE TEST SPECIMEN SHALL BE THE NORMAL METHOD .
2248	TEST PRESSURE DURATION SHALL BE 2248 MINUTE(S).
2126	REPEATABILITY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2126.
2127	REPEATABILITY. REPEATABILITY SHALL NOT BE GREATER THAN 2127 PERCENT OF FULL SCALE OUTPUT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2112
PER MIL-P-82459.	2114
AS FOLLOWS:	2602
DATA POINTS (NUMBER)	2115
TEST LOADS (CYCLES)	2116
TEST SPECIMEN TEMPERATURE (DEGREES CELSIUS)	2117
RESOLUTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2142
RESOLUTION (PERCENT OF FULL SCALE OUTPUT)	2144
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2132
PER MIL-T-83164.	2133
TEST POINTS (PERCENT OF RATED STIMULUS)	2134

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2112	REPEATABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2112.
2114	REPEATABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-82459.
2602	REPEATABILITY. TESTING SHALL BE PERFORMED AS FOLLOWS:
2115	THE NUMBER OF DATA POINTS TAKEN OVER THE OPERATING RANGE SHALL BE 2115.
2116	THE NUMBER OF TEST LOAD CYCLES SHALL BE 2116.
2117	TEST SPECIMEN TEMPERATURE SHALL BE NOT GREATER THAN 2117 DEGREE(S) CELSIUS.
2142	RESOLUTION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2142.
2144	RESOLUTION. RESOLUTION SHALL BE NOT LESS THAN 2144 PERCENT OF FULL SCALE OUTPUT.
2132	RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2132.
2133	RESOLUTION. TESTING SHALL BE IN ACCORDANCE WITH MIL-T-83164.
2134	INCREMENTAL TEST POINTS SHALL BE 2134 PERCENT OF RATED STIMULUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST SPECIMEN TEMPERATURE	
MINIMUM (DEGREES CELSIUS)	2136
MAXIMUM (DEGREES CELSIUS)	2138
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD .	4766

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2136	TEST SPECIMEN TEMPERATURE SHALL BE NOT LESS THAN 2136 DEGREE(S) CELSIUS.
2138	TEST SPECIMEN TEMPERATURE SHALL BE NOT GREATER THAN 2138 DEGREE(S) CELSIUS.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SERVICE ENVIRONMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1736
OPERATION ENVIRONMENT AS FOLLOWS:	2604
CORROSIVE GASES.	1737
CORROSIVE LIQUIDS.	1738
HYDRAULIC FLUID PER (DOC DES)	1739
FUEL PER (DOC DES)	1740
AIR.	1742
NITROGEN AND HELIUM.	1743
OXYGEN.	1744
PRESSURE	
MINIMUM (SELECT ONE)	
(PSIA)	1746
(PASCALS)	2606
MAXIMUM (SELECT ONE)	
(PSIA)	1747
(PASCALS)	2608

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1736	SERVICE ENVIRONMENT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.
2604	SERVICE ENVIRONMENT. THE TRANSDUCER SHALL BE CAPABLE OF OPERATION FOR THE FULL DESIGN SERVICE LIFE WHEN OPERATED INTERMITTENTLY OR CONTINUOUSLY IN THE FOLLOWING ENVIRONMENTS:
1737	CORROSIVE GASSES.
1738	CORROSIVE LIQUIDS.
1739	HYDRAULIC FLUID IN ACCORDANCE WITH 1739.
1740	FUEL IN ACCORDANCE WITH 1740.
1742	AIR.
1743	NITROGEN AND HELIUM.
1744	OXYGEN.
1746	PRESSURE SHALL BE NOT LESS THAN 1746 POUNDS PER SQUARE INCH ABSOLUTE.
2606	PRESSURE SHALL BE NOT LESS THAN 2606 PASCAL(S).
1747	PRESSURE SHALL BE NOT GREATER THAN 1747 POUNDS PER SQUARE INCH ABSOLUTE.
2608	PRESSURE SHALL BE NOT GREATER THAN 2608 PASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE	
MINIMUM (DEGREES CELSIUS)	1748
MAXIMUM (DEGREES CELSIUS)	1749
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1731
SUPPLIER CERTIFICATION.	1732
SHOCK. HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
HYSTERESIS (PERCENT OF FULL SCALE OUTPUT)	2610
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1748	TEMPERATURE SHALL BE NOT LESS THAN 1748 DEGREE(s) CELSIUS.
1749	TEMPERATURE SHALL BE NOT GREATER THAN 1749 DEGREE(s) CELSIUS.
1731	SERVICE ENVIRONMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1731.
1732	SERVICE ENVIRONMENT. THE SUPPLIER SHALL CERTIFY THAT THE TRANSDUCER WILL OPERATE SATISFACTORILY WHEN SUBJECTED TO THE SPECIFIED SERVICE ENVIRONMENT.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE .
2610	THE HYSTERESIS AFTER TESTING SHALL BE NO-T GREATER THAN 2610 PERCENT OF FULL SCALE OUTPUT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM MIL-STD-202, METHOD 207 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MONITOR CONTACT CHATTER PER MIL-STD-202, METHOD 310	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
MEASUREMENTS AS SPECIFIED.	2614
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
HYSTERESIS (PERCENT OF FULL SCALE OUTPUT)	2616

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD .
2614	MEASUREMENT(S) AFTER TESTING SHALL BE IN ACCORDANCE WITH THE REQUIREMENT(S) SPECIFIED.
1508	SHOCK, SPECIFIED PULSETHE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSETHERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2616	THE HYSTERESIS AFTER TESTING SHALL BE NOT GREATER THAN 2616 PERCENT OF FULL SCALE OUTPUT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
MONITOR CONTACT CHATTER PER MIL-STD-202, METHOD 310	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204
MEASUREMENTS AS SPECIFIED.	2618
TEMPERATURE (STORAGE AND OPERATIONAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2432

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD .
2618	MEASUREMENT(S) AFTER TESTING SHALL BE IN ACCORDANCE WITH THE REQUIREMENT(S) SPECIFIED.
2432	TEMPERATURE (STORAGE AND OPERATIONAL). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2432.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF DAMAGE.	2434
HYSTERESIS (PERCENT OF FULL SCALE OUTPUT)	2436
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2402
PER MIL-P-82459.	2404
INITIAL TEMPERATURE (DEGREES CELSIUS)	2406
INITIAL TEMPERATURE DURATION (HOURS)	2410
INITIAL TEMPERATURE INCREASE (DEGREES CELSIUS)	2412
SECOND TEMPERATURE (DEGREES CELSIUS)	2416
SECOND TEMPERATURE INCREASE (DEGREES CELSIUS)	2418
LOW TEMPERATURE DURATION (HOURS)	2422
TEMPERATURE CYCLES (NUMBER)	2424
MEASUREMENTS AS SPECIFIED.	2426

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2434	TEMPERATURE (STORAGE AND OPERATIONAL). THERE SHALL BE NO EVIDENCE OF DAMAGE THAT WILL AFFECT FORM, FIT OR FUNCTION.
2436	HYSTERESIS AFTER TESTING SHALL BE NOT GREATER THAN 2436 PERCENT OF THE FULL SCALE OUTPUT.
2402	TEMPERATURE (STORAGE AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2402.
2404	TEMPERATURE (STORAGE AND OPERATIONAL). TESTING SHALL BE IN ACCORDANCE WITH MIL-P-82459.
2406	INITIAL TEST TEMPERATURE SHALL BE 2406 DEGREE(S) CELSIUS.
2410	INITIAL TEST TEMPERATURE DURATION SHALL BE NOT LESS THAN 2410 HOUR(S).
2412	AFTER HOLDING THE INITIAL TEMPERATURE TO THE SPECIFIED VALUE , THE TEMPERATURE SHALL BE RAISED TO 2412 DEGREE(S) CELSIUS.
2416	THE SECOND TEST TEMPERATURE DURATION SHALL BE 2416 HOUR(S).
2418	AFTER HOLDING THE SECOND TEMPERATURE LEVEL AS SPECIFIED, THE TEMPERATURE SHALL BE DECREASED TO 2418 DEGREE(S) CELSIUS.
2422	DURATION AT LOW TEMPERATURE SHALL BE 2422 HOUR(S).
2424	THERE SHALL BE 2424 HIGH AND LOW TEMPERATURE CYCLE(S).
2426	MEASUREMENT(S) AFTER TESTING SHALL BE IN ACCORDANCE WITH THE REQUIREMENT(S) SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SENSITIVITY SHIFT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1977
DRIFT (PERCENT OF FULL SCALE OUTPUT)	1978
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1972
SUPPLIER CERTIFICATION.	1974
VERTICIAL BEAMWIDTH (SONAR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2011
AS FOLLOWS:	2620
BEAMWIDTH VERTICAL PLANE (DEGREES)	2012
NEGATIVE DB INTERVALS (NUMBER)	2016
FREQUENCY (KILOHERTZ)	2018
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2017

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1977	THERMAL SENSITIVITY SHIFT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1977.
1978	THERMAL SENSITIVITY SHIFT. MAXIMUM DRIFT IN READING DUE TO TEMPERATURE EFFECTS SHALL BE NOT GREATER THAN 1978 PERCENT OF FULL SCALE OUTPUT.
1972	THERMAL SENSITIVITY SHIFT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1974	THERMAL SENSITIVITY SHIFT. THE SUPPLIER SHALL CERTIFY THAT THE SENSITIVITY SHIFT SHALL BE NOT GREATER THAN THE VALUE SPECIFIED.
2011	VERTICAL BEAMWIDTH (SONAR). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2011.
2620	VERTICAL BEAMWIDTH (SONAR). REQUIREMENT(S) SHALL BE AS FOLLOWS:
2012	NOMINAL BEAMWIDTH IN THE VERTICAL PLANE SHALL BE 2012 DEGREE(S).
2016	NUMBER OF NEGATIVE DB INTERVALS SHALL BE 2016.
2018	NOMINAL FREQUENCY SHALL BE 2018 KILOHERTZ.
2017	VERTICAL BEAMWIDTH (SONAR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2017.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SUPPLIER CERTIFICATION.	2019
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
HYSTERESIS (PERCENT OF FULL SCALE OUTPUT)	2634
MECHANICAL RESONANT FREQUENCY (HERTZ)	2636
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2019	VERTICAL BEAMWIDTH (SONAR). THE SUPPLIER SHALL CERTIFY THAT SONAR VERTICAL BEAMWIDTH OF THE TRANSDUCER SHALL MEET THE REQUIREMENT(S) SPECIFIED.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2634	THE HYSTERESIS AFTER TESTING SHALL BE NOT GREATER THAN 2634 PERCENT OF THE FULL SCALE OUTPUT.
2636	THE NATURAL MEChANICAL (RESONANT) FREQUENCY SHALL BE 2636 HERTZ .
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR CONTACT CHATTER IN ACCORDANCE WITH MIL-STD-202, METHOD 310.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444
MEASUREMENTS AS SPECIFIED.	2638
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
HYSTERESIS (PERCENT OF FULL SCALE OUTPUT)	2622
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
2638	MEASUREMENT(S) AFTER TESTING SHALL BE IN ACCORDANCE WITH THE REQUIREMENT(S) SPECIFIED.
1435	VIBRATION, RANDOM . THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2622	THE HYSTERESIS AFTER TESTING SHALL BE NOT GREATER THAN 2622 PERCENT OF THE FULL SCALE OUTPUT.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MONITOR CONTACT CHATTER IN ACCORDANCE WITH MIL-STD-202, METHOD 310.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
PER MIL-A-22145.	3004
VIBRATION, THREE MUTUALLY PERPENDICULAR AXIS.	3005
HIGH TEMPERATURE DURATION (MINUTES)	2624
TEST TEMPERATURE (DEGREES CELSIUS)	2626
ROOM TEMPERATURE DURATION (MINUTES)	2628
LOW TEMPERATURE DURATION (MINUTES)	2630
TEST TEMPERATURE (DEGREES CELSIUS)	2632

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
3004	RANDOM VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-22145.
3005	VIBRATION AT EACH OF THE THREE MOST SEVERE RESONANT POINTS IN EACH AXIS, OF THREE MUTUALLY PERPENDICULAR AXIS.
2624	THE TEST DURATION AT HIGH TEMPERATURE SHALL BE 2624 MINUTE(S).
2626	THE TEST TEMPERATURE SHALL BE 2626 DEGREE(S) CELSIUS.
2628	THE TEST DURATION AT ROOM TEMPERATURE SHALL BE 2628 MINUTE(S).
2630	THE TEST DURATION AT LOW TEMPERATURE SHALL BE 2630 MINUTE(S).
2632	THE TEST TEMPERATURE SHALL BE 2632 DEGREE(S) CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESONANCE SURVEY FREQUENCY	
MINIMUM (CYCLES PER SECOND)	3002
MAXIMUM (CYCLES PER SECOND)	3003
MEASUREMENT AS SPECIFIED.	3006
ZERO DRIFT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1992
AS FOLLOWS:	2640
DRIFT FROM ZERO TO 5 SECONDS (PERCENT OF FULL SCALE OUTPUT)	1994
DRIFT FROM 5 SECONDS TO 5 MINUTES (PERCENT OF FULL SCALE OUTPUT)	1995
MAXIMUM DRIFT (PERCENT OF FULL SCALE OUTPUT)	1996
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1982

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3002	RESONANCE SURVEY FREQUENCY SHALL BE NOT LESS THAN 3002 CYCLES PER SECOND.
3003	RESONANCE SURVEY FREQUENCY SHALL BE NOT GREATER THAN 3003 CYCLES PER SECOND.
3006	MEASUREMENT(S) AFTER TESTING SHALL BE IN ACCORDANCE WITH THE REQUIREMENT(S) SPECIFIED.
1992	ZERO DRIFT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1992.
2640	ZERO DRIFT. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1994	ZERO DRIFT FROM TIME ZERO TO 5 SECONDS AFTER EXCITATION SHALL BE NOT GREATER THAN 1994 PERCENT OF FULL-SCALE OUTPUT.
1995	ZERO DRIFT FROM 5 SECONDS TO 5 MINUTES AFTER EXCITATION SHALL BE NOT GREATER THAN 1995 PERCENT OF FULL-SCALE OUTPUT .
1996	ZERO DRIFT SHALL BE NOT GREATER THAN 1996 PERCENT OF FULL-SCALE OUTPUT.
1982	ZERO DRIFT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	2648
MEASUREMENT TIME INCREMENTS (SELECT ONE)	
(SECONDS)	1984
(MINUTES)	1985
CONTINUOUS MONITORING FOR THERMAL EQUILIBRIUM.	1986
OPERATIONAL CYCLES PRIOR TO TEST (NUMBER)	1987
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2648 ZERO DRIFT. TESTING SHALL BE PERFORMED AS FOLLOWS:

1984 TIME INCREMENTS AT WHICH MEASUREMENTS ARE TAKEN SHALL BE 1984 SECOND(S).

1985 TIME INCREMENTS AT WHICH MEASUREMENTS ARE TAKEN SHALL BE 1985 MINUTE(S).

1986 CONTINUOUS MONITORING SHALL BE PERFORMED UNTIL THERMAL EQUILIBRIUM IS ESTABLISHED.

1987 1987 OPERATIONAL CYCLES SHALL BE PERFORMED PRIOR TO TESTING.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (c) 7003.

7004 (D) 7004.

7005 (E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A372)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

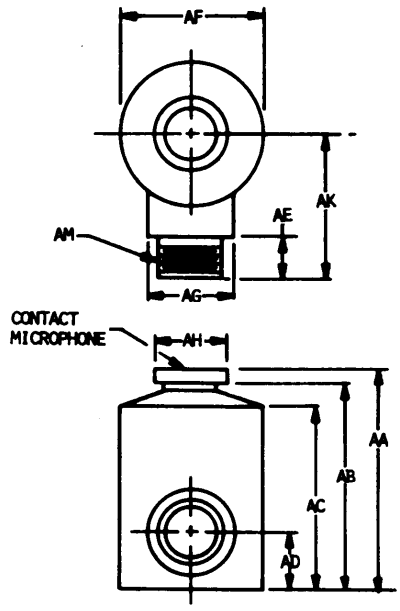


085-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

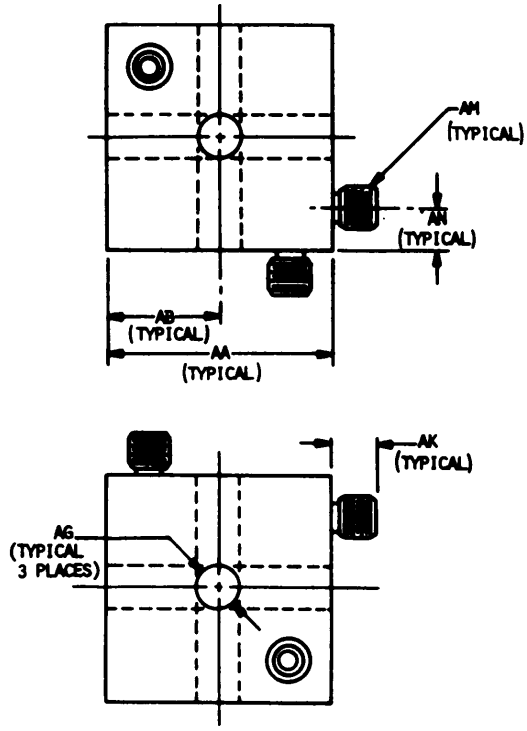


085-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

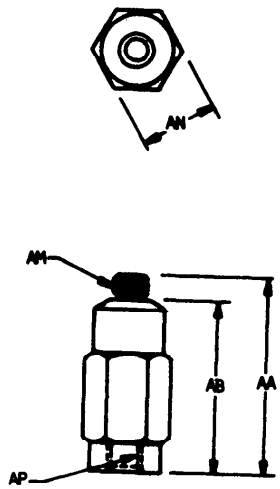


085-03-1

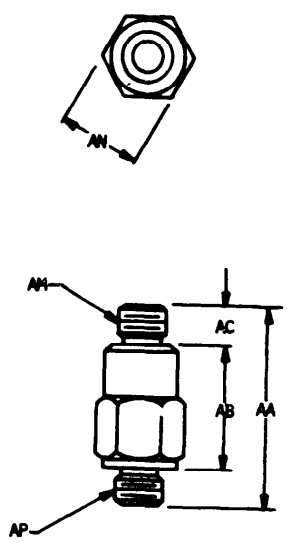


085-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

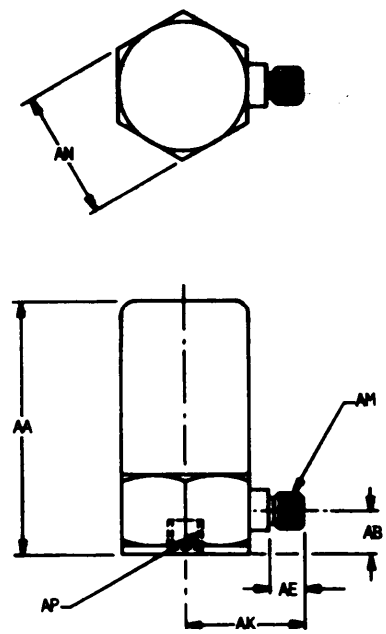


085-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

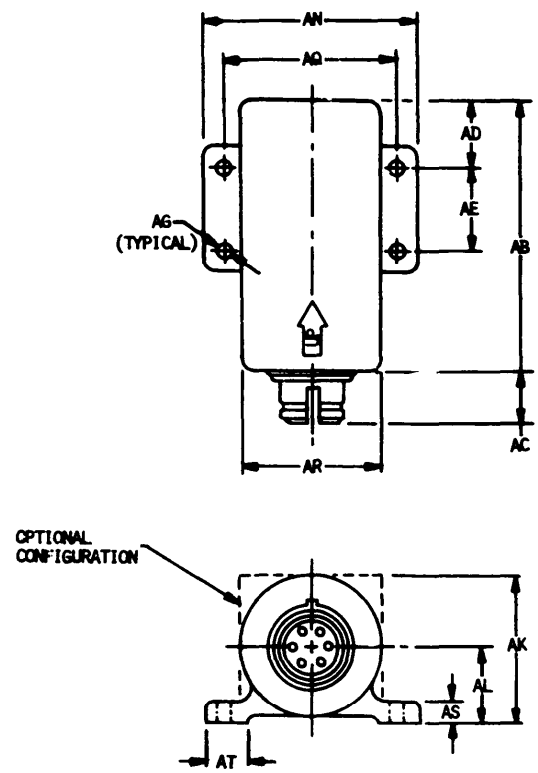


085-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

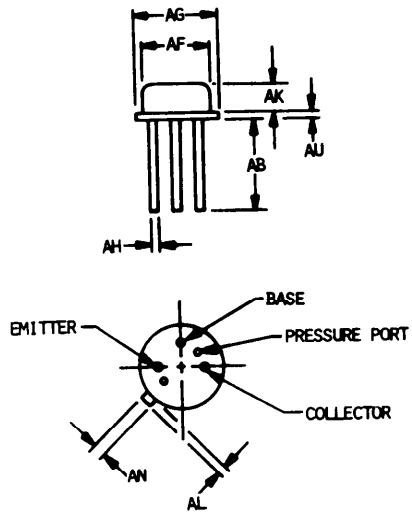


085-05-1

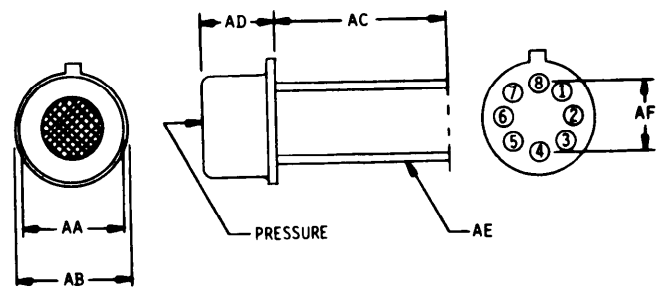


085-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

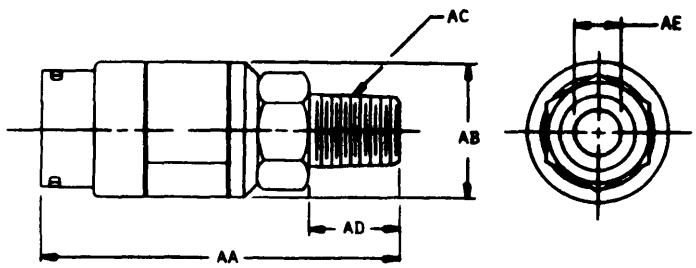


085-05-3

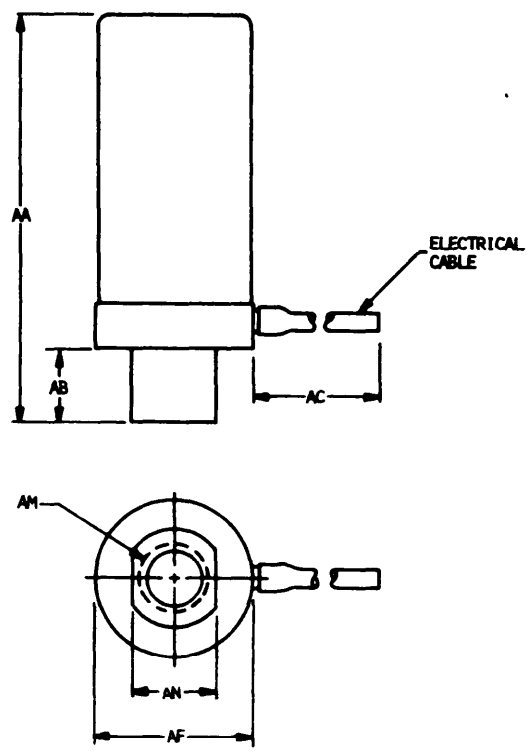


085-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

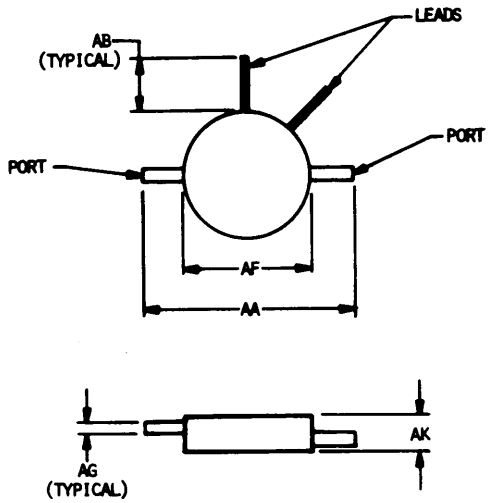


085-07-1

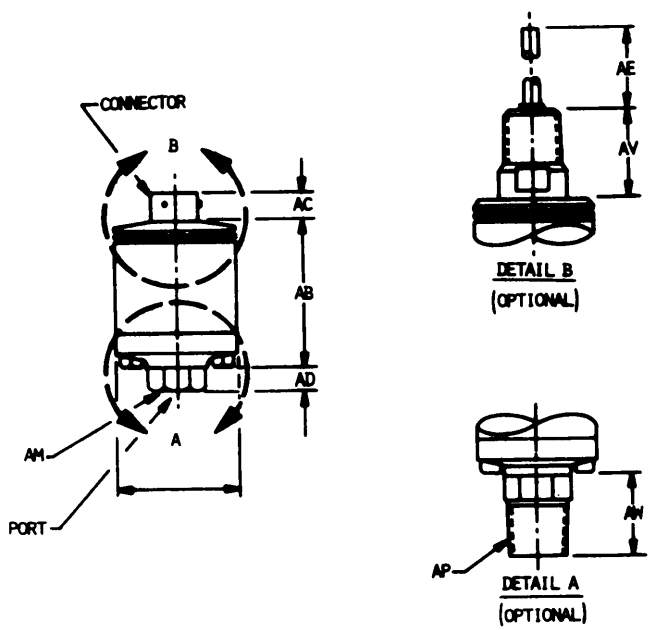


085-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

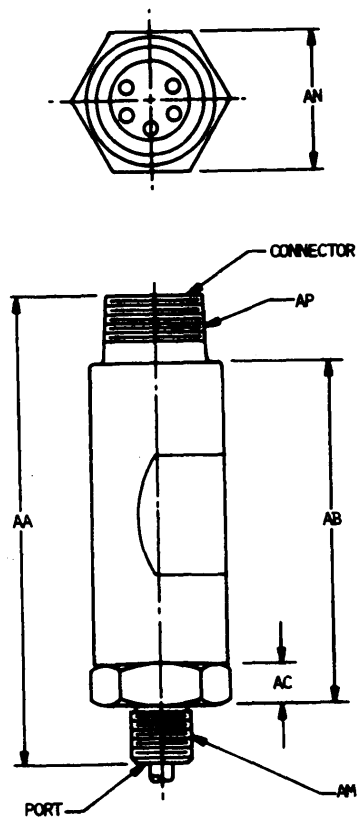


085-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

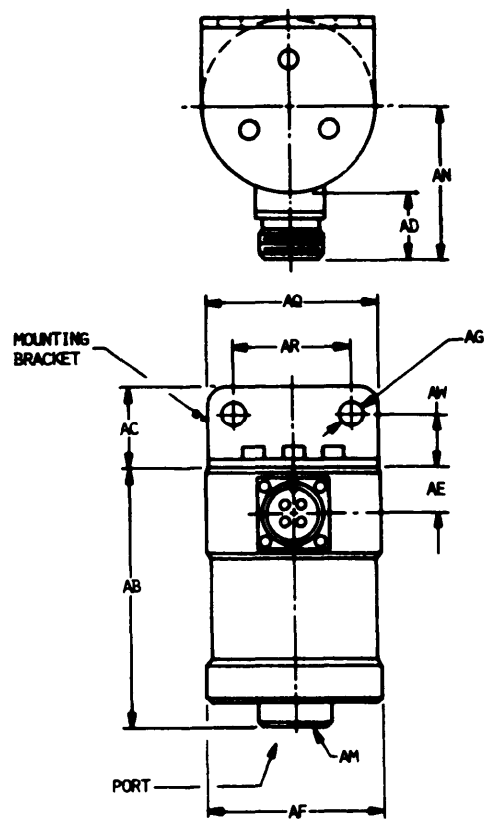


085-08-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

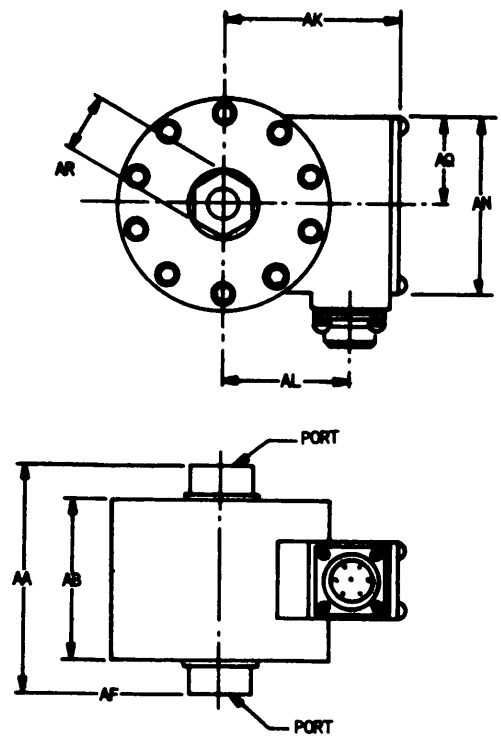


085-08-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

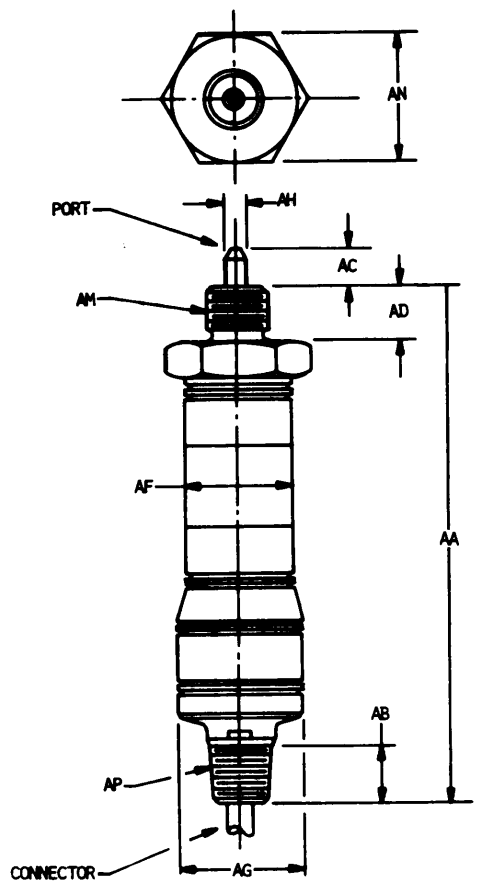


085-08-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

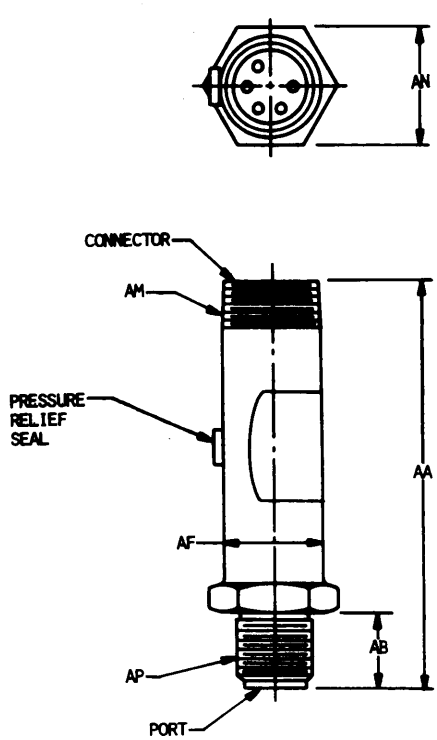


085-08-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

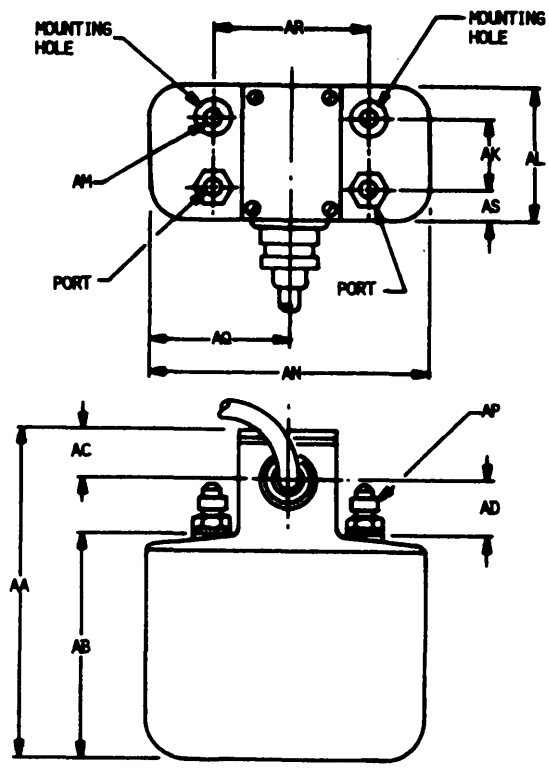


085-08-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

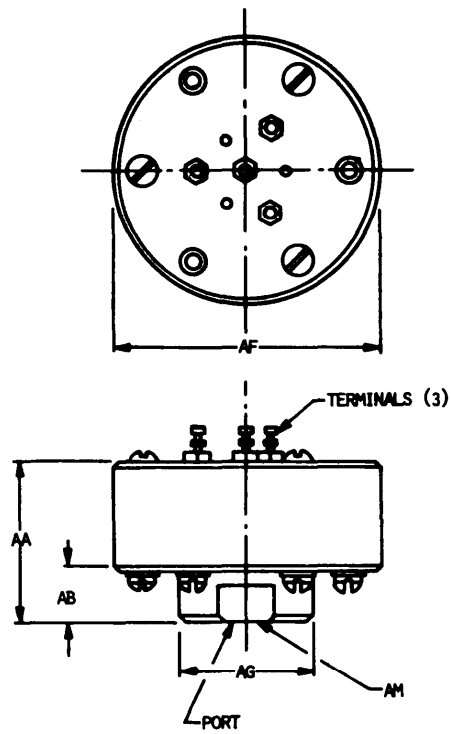


085-08-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

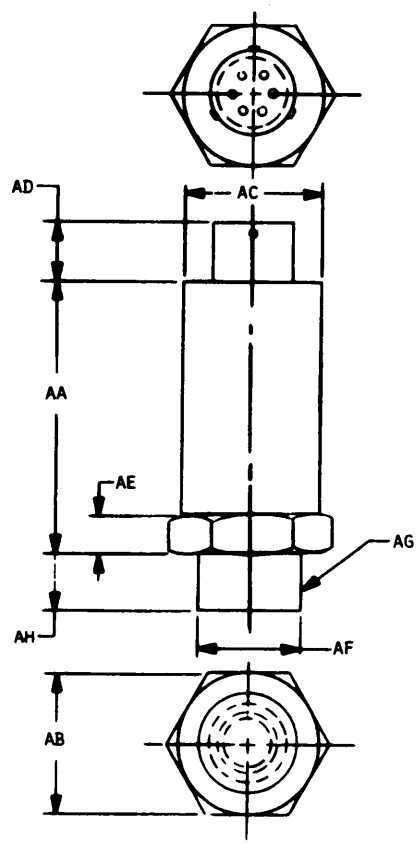


085-08-09

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

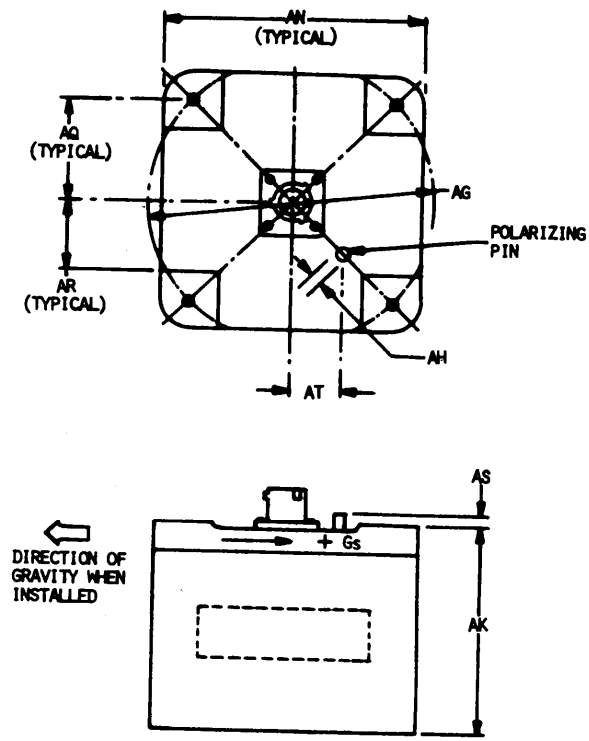


085-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

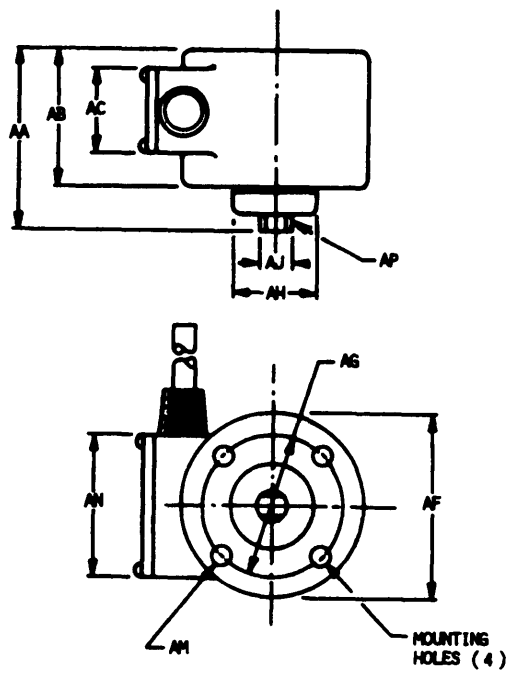


085-10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

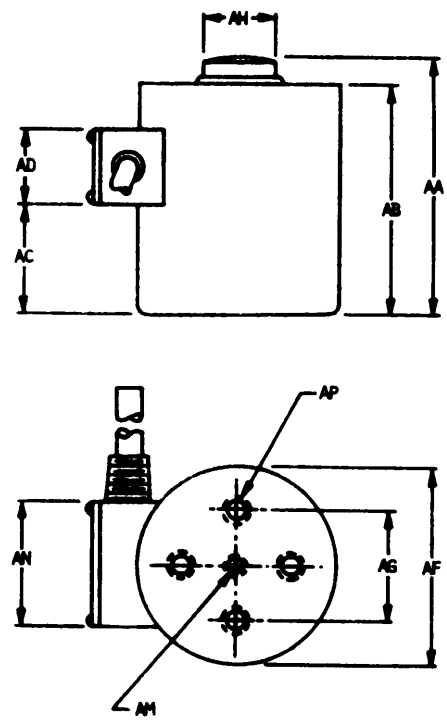


085-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

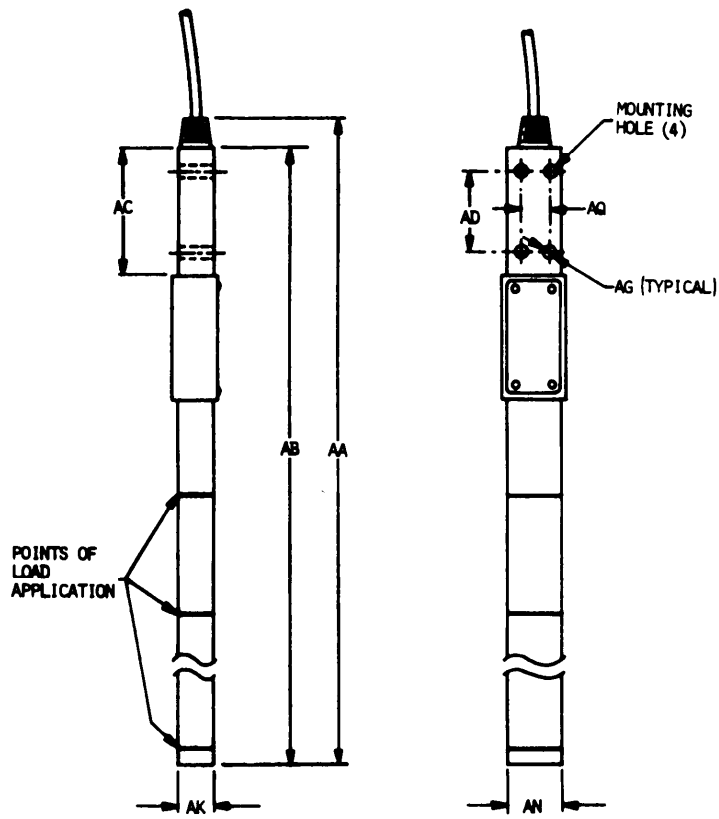


085-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

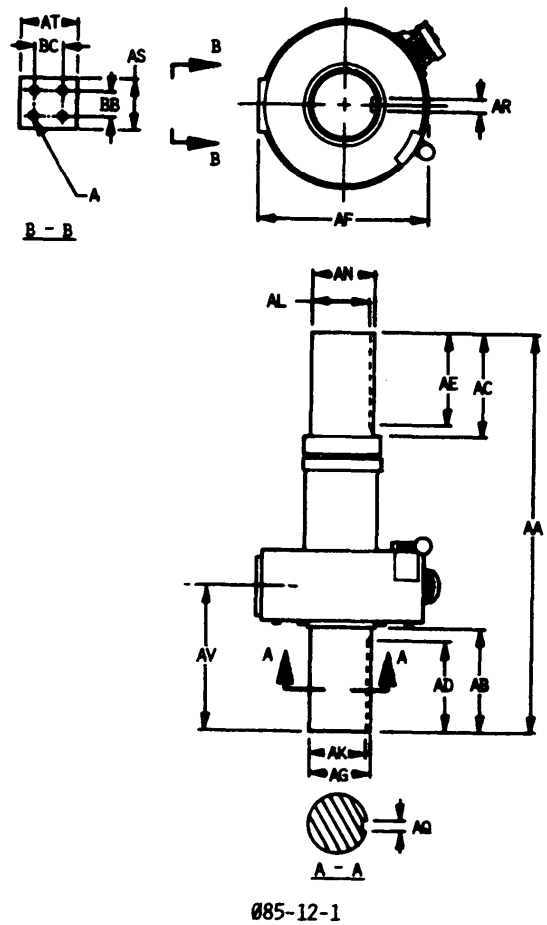


Ø85-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

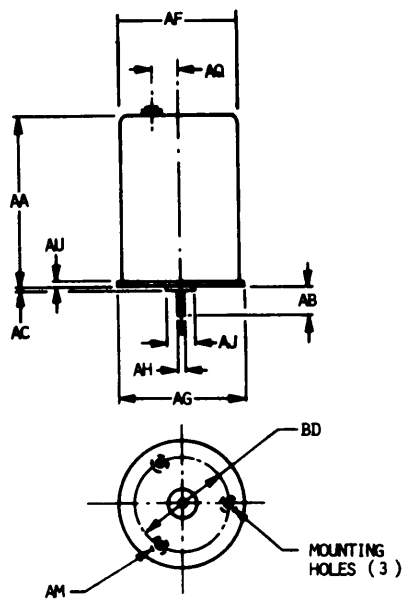


Ø85-13-1

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-23T20:57Z
Check the source to verify that this is the current version before use.

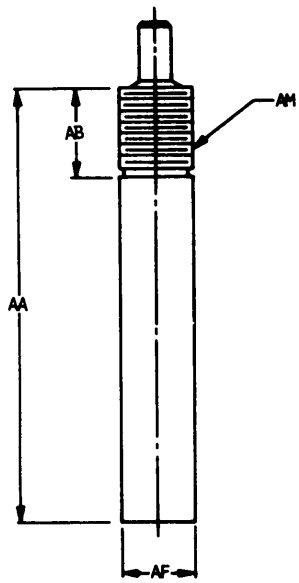


Ø85-13-2

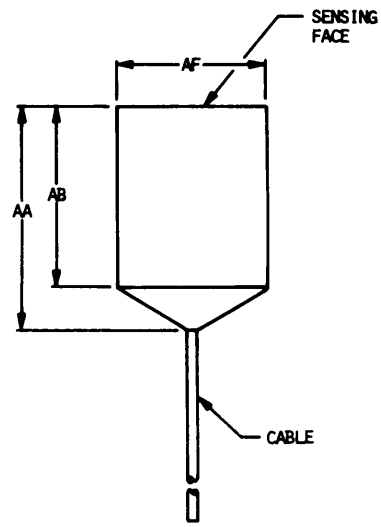


Ø85-14-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

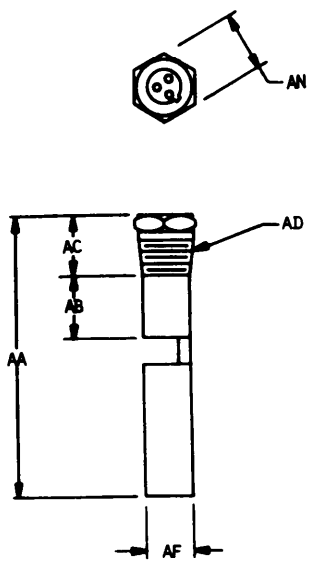


Ø85-15-1

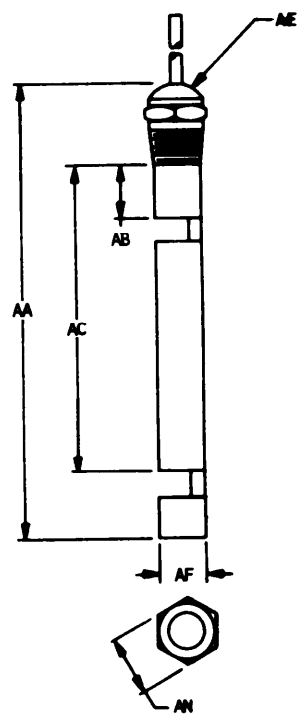


Ø85-16-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

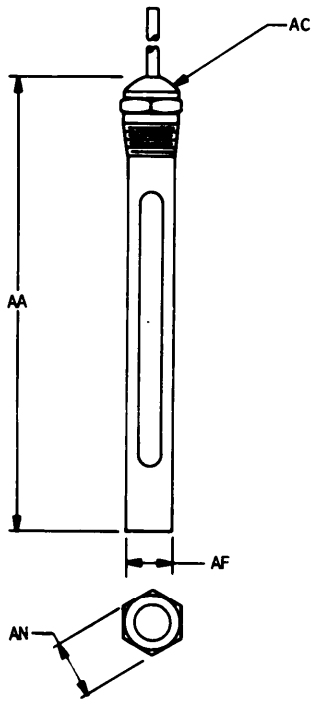

Ø85-17-1



Ø85-19-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1482	76	1633	24	1890	22
0102	14	1486	76	1634	24	1893	22
0103	14	1487	78	1635	24	1901	22
0104	14	1488	78	1636	24	1904	22
0105	14	1494	76	1637	24	1905	22
0107	16	1495	76	1638	24	1906	22
0108	16	1499	80	1639	24	1909	22
0700	14	1500	80	1652	26	1914	22
0800	14	1502	80	1654	26	1919	28
1004	14	1503	80	1656	26	1921	66
1005	14	1504	80	1662	28	1922	66
1006	14	1508	78	1664	28	1923	66
1008	14	1509	78	1672	50	1928	66
1009	18	1533	88	1674	50	1931	66
1382	92	1534	88	1680	48	1932	66
1402	92	1548	32	1681	48	1933	66
1426	88	1549	32	1682	48	1934	66
1427	88	1557	32	1685	48	1938	64
1428	90	1558	32	1686	48	1939	64
1430	90	1578	20	1687	48	1972	84
1431	90	1580	20	1692	50	1974	84
1435	88	1590	26	1712	28	1977	84
1436	88	1592	26	1731	76	1978	84
1438	90	1600	24	1732	76	1982	94
1439	90	1602	24	1736	74	1984	96
1442	88	1604	24	1737	74	1985	96
1444	88	1610	24	1738	74	1986	96
1446	86	1611	24	1739	74	1987	96
1447	86	1612	24	1740	74	1992	94
1448	86	1613	26	1742	74	1994	94
1452	90	1614	26	1743	74	1995	94
1453	90	1615	26	1744	74	1996	94
1455	86	1616	26	1746	74	2001	52
1456	86	1617	26	1747	74	2002	52
1459	90	1618	26	1748	76	2005	50
1462	90	1619	26	1749	76	2006	50
1468	78	1620	26	1881	20	2007	50
1477	52	1630	22	1884	22	2008	50
1478	78	1631	22	1885	22	2009	50
1479	78	1632	22	1886	20	2011	84

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2012	84	2136	72	2342	32	2518	62
2016	84	2138	72	2344	32	2550	30
2017	84	2142	70	2352	46	2554	34
2018	84	2144	70	2354	46	2556	34
2019	86	2162	36	2356	46	2566	46
2022	64	2164	36	2358	46	2568	48
2026	64	2167	36	2362	46	2570	48
2032	64	2168	36	2364	46	2572	48
2034	64	2169	36	2368	46	2574	50
2042	58	2182	34	2382	48	2582	56
2043	58	2184	34	2384	48	2584	60
2044	58	2185	34	2386	48	2586	60
2046	58	2192	56	2388	48	2588	60
2052	58	2194	56	2392	46	2590	62
2054	58	2196	56	2394	46	2592	62
2061	36	2198	56	2402	82	2594	62
2062	36	2204	58	2404	82	2596	62
2063	38	2210	58	2406	82	2598	66
2064	38	2212	58	2410	82	2600	68
2066	38	2214	58	2412	82	2602	70
2070	38	2215	58	2416	82	2604	74
2072	38	2222	56	2418	82	2606	74
2082	36	2224	56	2422	82	2608	74
2084	36	2232	68	2424	82	2610	76
2092	60	2234	68	2426	82	2614	78
2094	60	2236	68	2432	80	2616	78
2096	60	2242	68	2434	82	2618	80
2099	60	2244	68	2436	82	2620	84
2102	60	2246	68	2472	62	2622	88
2104	60	2248	68	2474	62	2624	92
2112	70	2262	66	2476	62	2626	92
2114	70	2264	66	2482	62	2628	92
2115	70	2312	34	2488	62	2630	92
2116	70	2314	34	2494	64	2632	92
2117	70	2316	34	2496	64	2634	86
2126	68	2322	34	2498	64	2636	86
2127	68	2328	34	2500	64	2638	88
2132	70	2330	34	2512	60	2640	94
2133	70	2332	34	2514	62	2648	96
2134	70	2334	34	2516	62	3002	94

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3003	94	4855	42	6207	56	7022	28
3004	92	4856	42	6210	32	7023	28
3005	92	4859	40	6226	30	7024	28
3006	94	4861	42	6233	30	7572	18
4678	92	4862	42	6239	32	7577	18
4684	80	4863	30	6250	30	7580	20
4685	80	4864	30	6251	30	7629	98
4686	80	4865	30	6263	32		
4707	86	4867	44	6264	32		
4708	86	4868	30	6265	32		
4709	86	4869	44	6267	44		
4717	44	4870	44	6272	30		
4765	72	4874	42	6273	30		
4766	72	4878	72	6280	40		
4770	72	4884	38	6292	40		
4771	72	4885	40	6293	40		
4772	72	4886	40	6294	40		
4773	72	4890	54	6300	38		
4782	72	4891	40	6308	40		
4788	54	4892	30	6310	42		
4790	54	4893	32	6311	40		
4791	52	4897	44	6312	40		
4793	54	4900	42	6369	14		
4795	52	4901	38	6372	98		
4798	52	4902	42	6870	96		
4799	52	4906	38	6873	14		
4803	54	4908	38	6874	16		
4805	52	4950	18	6941	16		
4813	54	4969	54	6942	16		
4815	52	4970	54	6991	98		
4842	44	4971	54	6992	98		
4844	44	4975	92	6993	98		
4845	44	4976	92	6994	98		
4846	44	4977	92	6995	98		
4847	42	5000	44	7001	96		
4848	44	6200	86	7002	96		
4849	40	6202	54	7003	96		
4850	44	6203	78	7004	96		
4853	54	6204	80	7005	96		
4854	42	6206	56	7021	28		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	30
Additional Part Marking	98
Additional Requirements	96
Aperture Cards Required	16
Applicable Documents	98
Base Document	14
Burst Pressure	32
Calibration	34
City, State, Zip	14
Company Name\Command	14
Configuration	18
Contract Number/Office Symbol	14
Control, Source	14
Control, Specification	16
DC Resistance	36
Design and Construction	20
Dielectric Withstanding Voltage At Reduced Barometric Pressure	38
Dielectric Withstanding Voltage At Sea Level	42
Electromagnetic Interference (EMI)	46
Explosion Proof	46
Filling Medium	48
Finishes	20
Format	14
Government Design Activity FSCM	14
Horizontal Response	50
Humidity	52
Hydrostatic Pressure	56
Hysteresis	58
Illustrations	18
Input Impedance	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Leakage	60
Linearity	64
Materials	18
Metals	20
Mounting Hardware	96
Nomenclature	98
Notes	98
Packaging	98
Part Marking	98
Part Number	16
Part Number Cross-Reference	98
Phone Number	14
Proof Pressure	64
Quality Assurance Provisions	98
Reduced Pressure (Vacuum)	66
Requester ᵗs FSCM	14
Requester ᵗs Name	14
Repeatability	68
Resolution	70
Revision of AEDPS Document (Number)	16
Salt Spray	72
Scope	16
Service Environment	74
Shock, High Impact	76
Shock, Specified Pulse	78
Source Table	16
Street/Building	14
Superseded Document	98
System Application	14
Tabulated Characteristics	18
Temperature (Storage and Operational)	80
Thermal Sensitivity Shift	84

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Units of Measure ---------- 84

Vertical Beamwidth (Sonar) ---------- 84
Vibration, High Frequency ---------- 86
Vibration, Random ---------- 88

Weight/Mass ---------- 28
Workmanship ---------- 96

Zero Drift ---------- 94

* U. S. GOVERNMENT PRINTING OFFICE: 1987-704-036/74931

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

SRS CONTROL NO.	
*TITLE CODE (1 2 3 4 5 6)	*REQUESTER NO. (7 8 9 10 11 12)

	CHAR CODE			
*REQUESTER'S NAME	Ø	1	Ø	1
*COMPANY NAME/COMMAND	Ø	1	Ø	2
*STREET/BUILDING	Ø	1	Ø	3
*CITY, STATE, ZIP	Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø	1	Ø	5
*REQUESTER FSCM	1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL	1	Ø	Ø	5
*BASE DOCUMENT	1	Ø	Ø	6
*SYSTEM APPLICATION	1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM	6	3	6	9
*FORMAT: SIX SECTION DOCUMENT.	Ø	7	Ø	Ø
OR ONE SECTION DOCUMENT.	Ø	8	Ø	Ø
REVISION OF AEDPS DOCUMENT NO.	Ø	1	Ø	8
*CONTROL: SOURCE.	6	8	7	3
OR SPECIFICATION.	6	8	7	4
UNIT OF MEASURE: U.S.	6	9	4	1
OR SI.	6	9	4	2
*SOURCE TABLE	9	A	A	B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART___REV___NOTICE#___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S̄, I, Z CORRECTLY WRITTEN)

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.	
*TITLE CODE	*REQUESTER NO.
1 2 3 4 5 6	7 8 9 10 11 12

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

CHAR CODE	CHARACTERISTIC VALUE
	1 5 10 15 20 25 30 35 40 45 50 55 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY MISSILE COMMAND
ATTN: AMSMI-RD-SE-TD-ST
REDSTONE ARSENAL, AL 35898-5270

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T20:57Z
Check the source to verify that this is the current version before use.