MILITARY SPECIFICATION

BELT, AIRCRAFT SAFETY, LAP HBU-2B/A AND HBU-4B/A

1. SCOPE

1.1 Scope. This specification covers the requirements for two types of adjustable lap safety belts for aircraft ejection seat systems. The belts incorporate an automatic, gas-actuated buckle.

1.2 Classification. The lap belts shall be of the following types, as specified (see 6.2):

HBU-2B/A - For aircraft ejection seat systems utilizing personnel parachutes deployed by an actuating lanyard which is attached to the lap belt buckle by an automatic parachute ripcord release anchor (hereinafter referred to as the "gold key").

HBU-4B/A - For aircraft ejection seat systems utilizing personnel parachutes deployed by means other than attachment to the lap belt buckle.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-576	Box, Wood, Cleated, Veneer, Paper Overlaid
PPP-B-636	Box, Fiberboard
PPP-B-676	Boxes, Setup

Military

MIL-P-116	Preservation, Methods of
MIL-C-5541	Chemical Conversion Coats on Aluminum and Aluminum Alloys
MIL-I-6866	Inspection, Penetrant Method of
MIL-I-6868	Inspection Process, Magnetic Particle
MIL-L-10547	Liners, Case and Sheet Overwrap; Water-Vaporproof or Waterproof, Flexible

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

MIL-H-25579	Hose Assembly, Tetrafluoroethylene, High Temperature, Medium Pressure

STANDARDS

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-810	Environmental Test Methods

DRAWINGS

Air Force

56D533	Harness - Aircraft Safety, Shoulder, Adjustment, Type MB-6
71162	Belt, Aircraft Safety, Lap HBU-2B/A and HBU-4B/A

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the contracting officer or as directed by the procuring activity.)

3. REQUIREMENTS

3.1 Preproduction. This specification provides for preproduction testing.

3.2 General requirements. The requirements of Drawing 71162 and the detail drawings thereto shall apply as requirements of this specification except as specified herein.

3.2.1 Configuration. The general configuration of the lap belt assembly is shown on figure 1.


3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein or on the applicable drawings shall be selected in accordance with MIL-STD-143.

3.4 Materials. Materials which are used in the fabrication of the lap belts and which are not specifically designated by applicable military specifications shall be of the best quality and entirely suitable for the purpose intended.

3.5 Design and construction

3.5.1 Buckle assembly. The buckle assembly as shown on detail Drawings 71170-10 (HBU-2B/A) and 71170-30 (HBU-4B/A) shall be designed so that it will be connected to the left side of the belt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

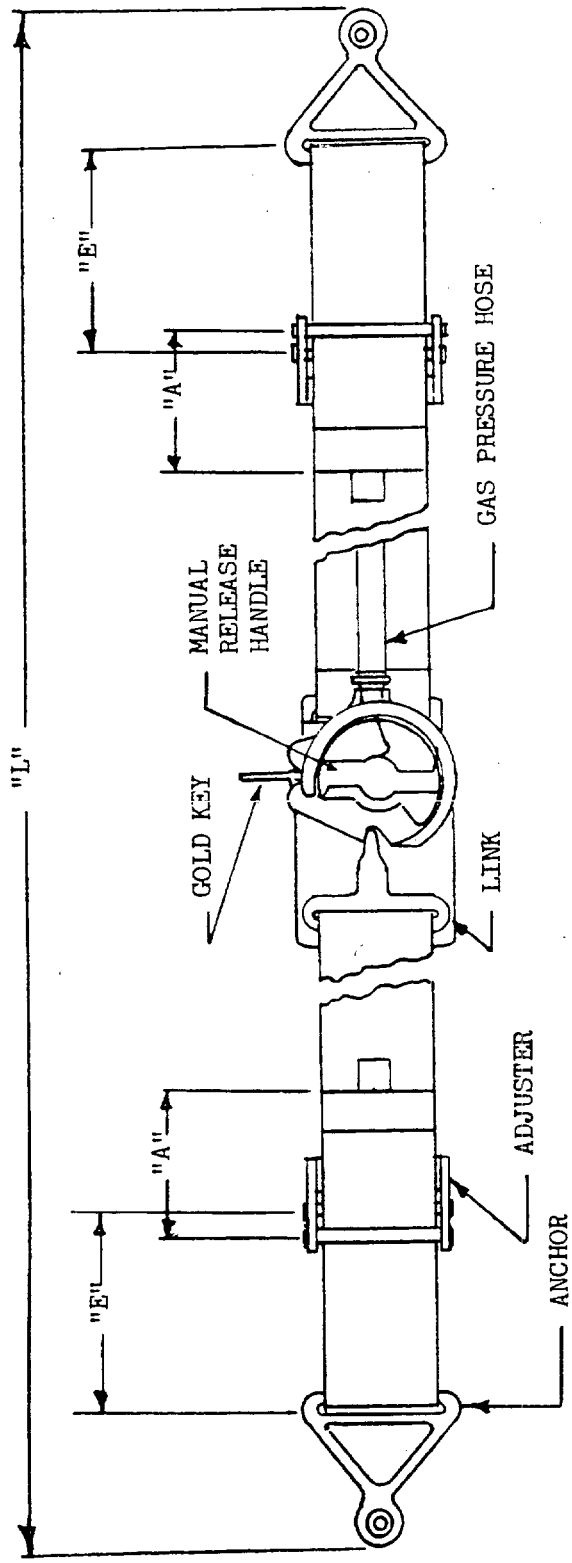

"A" - Must be 2 inches minimum
"E" - Must be 4.25 ±.12 inch
"L" - Must be 51.50 ±.50 inch

FIGURE 1. Lap Belt Assembly Configuration and Dimensional Notations

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

3.5.1.1 Release actuating handle surface. The surface of the release actuating handle shall be serrated. This surface shall be inclusive of any area in contact with the palm of the hand or fingers during the opening of the lap belt.

3.5.1.2 Release mechanism. The release mechanism of the lap belt buckle shall be so designed that, when manually actuated, both latches will release to the fully open position, and the gold key and the link half of the assembly shall fall free as the handle is rotated at a steady rate of 0° to 4° per second with a load of 50 +10, -0 pounds applied to each end of the belt as specified in 4.6.8.1.2b.

3.5.2 Lap belt link. The belt link (detail Drawing 71163) shall be designed to incorporate a 1-3/4-inch webbing. The passage for the webbing shall be adequate in size to preclude binding during lap belt adjustment.

3.5.3 Lower housing assembly. The lower housing shall be designed to accommodate 1-3/4-inch webbing and to be connected to the buckle assembly. The passage for the webbing shall be adequate in size to preclude binding during lap belt adjustment.

3.5.3.1 Cutout for gold key latch. The portion of the upper and lower housing assembly that is cut out for the gold key latch shall be designed to hold the gold key but to prevent insertion of the belt link.

3.5.3.2 Protective flap. A protective flap shall be provided on the lower housing assembly. This flap shall be of sufficient size to cover the lower housing assembly and lap belt link but shall not interfere with passage of the webbing.

3.6 Performance. Performance requirements specified herein shall apply to both the HBU-2B/A and HBU-4B/A lap belts.

3.6.1 Environmental durability. The lap belt buckle shall withstand subjection to humidity, salt fog, and dust conditions as specified in 4.6.2 without degradation of automatic actuating capability.

3.6.2 Manual latch cycling. The manual latch shall withstand 2,500 opening cycles without excessive wear and without the force required to unlatch it decreasing to less than 8 pounds nor increasing to more than 12 pounds.

3.6.3 Automatic operation and separation. With the lap belt buckle subjected to loads as specified in 4.6.4, the buckle shall automatically unlatch upon actuation of an M12 initiator (or equivalent) and shall separate without binding for a clean release of the lap belt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

3.6.3.1 Pressure retention. The automatic latch gas pressure retention shall be such that a gas pressure surge of at least 1,000 pounds per square inch gage (psig) will be received by a simulated rotary actuator when the buckle is tested as specified in 4.6.4.2 and 4.6.4.3.

3.6.4 Actuation pressure. The pressure required to unlatch the buckle, with no load applied thereto, shall be 450 ±100 psig. The pressure required to unlatch the buckle while subjected to the load conditions specified in 4.6.5 shall not exceed 1,000 psig.

3.6.5 Vertical drop. The lap belt assembly shall withstand a vertical drop of 12 feet onto reinforced concrete as specified in 4.6.6 without structural failure or detrimental damage. Actuation pressure subsequent to such a drop, with no load applied, shall be in accordance with 3.6.4. It is permissible to drop the complete belt assembly.

3.6.6 Functional requirements of the buckle. Subjection of the lap belt to the static load specified in 4.6.7 shall not cause any structural or mechanical failure of the belt. After the loads are reduced as specified, the buckle shall open and separate satisfactorily.

3.6.7 Functional requirements of the lap belt. The lap belt shall withstand a static load of 2,000 pounds as specified in 4.6.8 without weakening of the webbing or stitching, slippage of the webbing through the adjusting hardware, or deformation of the metal fittings.

3.6.7.1 Manual opening force

3.6.7.1.1 No-load opening force. With no load on the buckle, the force required to manually unlatch the buckle shall be not less than 8 pounds nor more than 12 pounds when measured as specified in 4.6.8.1.

3.6.7.1.2 Static-load opening force. With a tensile load of 400 pounds on the buckle, the force required to manually actuate the release mechanism shall be not more than 45 pounds when measured as specified in 4.6.8.1.

3.7 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.8 Physical defect inspection. Magnetic inspection of all magnetizable highly stressed parts shall be in accordance with MIL-I-6868. Inspection of aluminum or aluminum-alloy parts which have been treated with material conforming to MIL-C-5541 shall be in accordance with a process conforming to MIL-I-6866. No cracks or any other defects which will adversely affect performance or reliability shall be disclosed by the inspection. Where material conforming to MIL-C-5541 is used for touchup on anodized parts, this inspection process will not be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

3.9 Changes. No changes affecting interchangeability, weight, function, performance, or reliability shall be made in the assembly or detail parts of the lap belt without prior approval of the procuring activity. In order to obtain the approval of the procuring activity, any change or changes proposed shall result in a lap belt of equal or superior quality.

3.10 Identification of product. The lap belt shall be marked in accordance with MIL-STD-130.

3.11 Government-furnished property. When specified in the contract or purchase order (see 6.2), the Government will furnish the contractor, upon his request, the following items, as required: Initiator Delay, M4 (US Army Frankford Arsenal Part No. 8595816) or Initiator Delay, M12 (US Army Frankford Arsenal Part No. 8593159).

3.12 Workmanship. Because of the emergency nature of the equipment, all details of workmanship shall be of the highest quality to ensure proper functioning and reliability under all conditions to which the safety belts may be subjected. Unsatisfactory workmanship such as loose, cocked, or inadequately headed rivets; distorted, loose, or inadequately secured bushings and pins; loose, broken, or incomplete stitching; and rough, malformed, misaligned, or improperly machined fittings shall be considered defects. All parts shall be clean and free from dirt, sand, metal chips, or any other foreign matter while being assembled.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Notice of testing. The Government reserves the right to verify and witness all testing necessary to assure compliance with the requirements of this specification and shall be notified at least 15 days before the actual start of testing.

4.2 Classification of tests. The inspection and testing of lap belts shall be classified as follows:

a. Preproduction tests

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

b. Quality conformance tests.

4.3 Test conditions. Unless otherwise specified, all tests required by this specification shall be conducted under the normal atmospheric conditions existing at the time and location of the tests.

4.4 Preproduction tests. The preproduction tests shall consist of all the tests described under 4.6. The preproduction tests shall be performed on test samples in accordance with the preproduction test schedule in table I to demonstrate that the lap belts meet the performance requirements of this specification. The test results shall be approved by the procuring activity prior to lap belt production.

4.5 Quality conformance tests. Quality conformance tests shall consist of:

a. Individual tests

b. Sampling tests.

4.5.1 Individual tests. Each lap belt shall be subjected to the examination of product test as described in 4.6.1.

4.5.2 Sampling tests. Five lap belts shall be selected at random from each lot (see 4.5.2.1) and subjected to the following tests (sample test items shall be excluded from the production lot):

a. Manual opening force tests of 4.6.8.1

b. Low temperature, no load, actuation pressure test of 4.6.5

c. Functional test of the buckle (no automatic actuation required) of 4.6.7.

4.5.2.1 Lot. A lot shall consist of 205 lap belts of each type, or fraction thereof, produced on the contract or order and shall be manufactured under essentially the same conditions and submitted for acceptance at substantially the same time.

4.5.2.2 Rejection and retest. When one or more items from a lot fail to meet the specification, acceptance of all items in the lot shall be withheld until the extent and cause of failure have been determined. The contractor shall explain fully to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the sampling tests shall be repeated.

4.5.2.3 Individual tests may continue. For production reasons, individual tests may be continued pending investigation of a sampling test failure. However, final acceptance of the entire lot or lots produced later shall not be made until it is determined that all items meet all requirements of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

TABLE I. Preproduction Test Schedule

Test	Test Paragraph Number	Unit Number																
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Examination of product	4.6.1	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Manual opening force tests	4.6.8.1	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X
Manual latch cycling	4.6.3														X			
High temperature	4.6.4.1	X	X	X	X	X												
Low temperature	4.6.4.2		X	X	X	X	X											
Pressure retention	4.6.4.3		X	X	X	X		X										
Actuation pressure (-65°F, loaded)	4.6.5	X					X	X	X	X								
Actuation pressure (+200°F, loaded)	4.6.5	X					X	X	X		X							
Actuation pressure (-65°F, no load)	4.6.5								X	X	X	X	X					
Actuation pressure (+200°F, no load)	4.6.5									X	X	X	X	X				
Vertical drop	4.6.6											X	X	X				
Functional test of lap belt	4.6.8														X			
Environmental tests	4.6.2													X	X	X	X	X
Functional test of buckle	4.6.7															X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all the defects likely to be found and the method of correcting them.

4.6 Test methods

4.6.1 Examination of product. Each lap belt shall be inspected for conformance to this specification and the applicable drawings with respect to workmanship, materials, dimensions, and markings.

4.6.2 Environmental tests. Five lap belt buckles shall be subjected to the environmental tests specified in table II. At the conclusion of all environmental tests, an M12 initiator (or equivalent) and a 48-inch length of pressure transmission hose in accordance with MIL-H-25579 shall be attached to the buckle. The following loads shall then be applied to the buckle as shown on figure 2: Load A shall be 1,000 pounds and loads B and C shall be 0 pound. The initiator shall then be actuated. The automatic latch shall release, and the separating components of the buckle shall separate readily.

TABLE II. Environmental Tests

Test	MIL-STD-810 Method and Procedure	Time (Hours)
Humidity	Method 507, Procedure I	240
Salt fog	Method 509, Procedure I	48
Dust	Method 510, Procedure I	12

4.6.3 Manual latch cycling. A manual latch shall be subjected to 2,500 latch-opening cycles. Unless otherwise approved by the procuring activity, a complete lap belt buckle shall be used for this test. A manual latch-opening cycle shall consist of actuating the mechanism from the latched to the unlatched position and then back to the latched position. On the first and the last five cycles, the force required to unlatch the buckle shall be measured by use of a torque wrench adapter conforming to figure 2 and recorded. The force required shall be derived by dividing the inch-pound torque value by .75 inch. After completion of the 2,500 cycles, the wear incurred by all moving and mating parts shall be determined and recorded. No adjustments or changes shall be made to the buckle for the duration of this test. The latch shall meet the requirements specified in 3.6.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

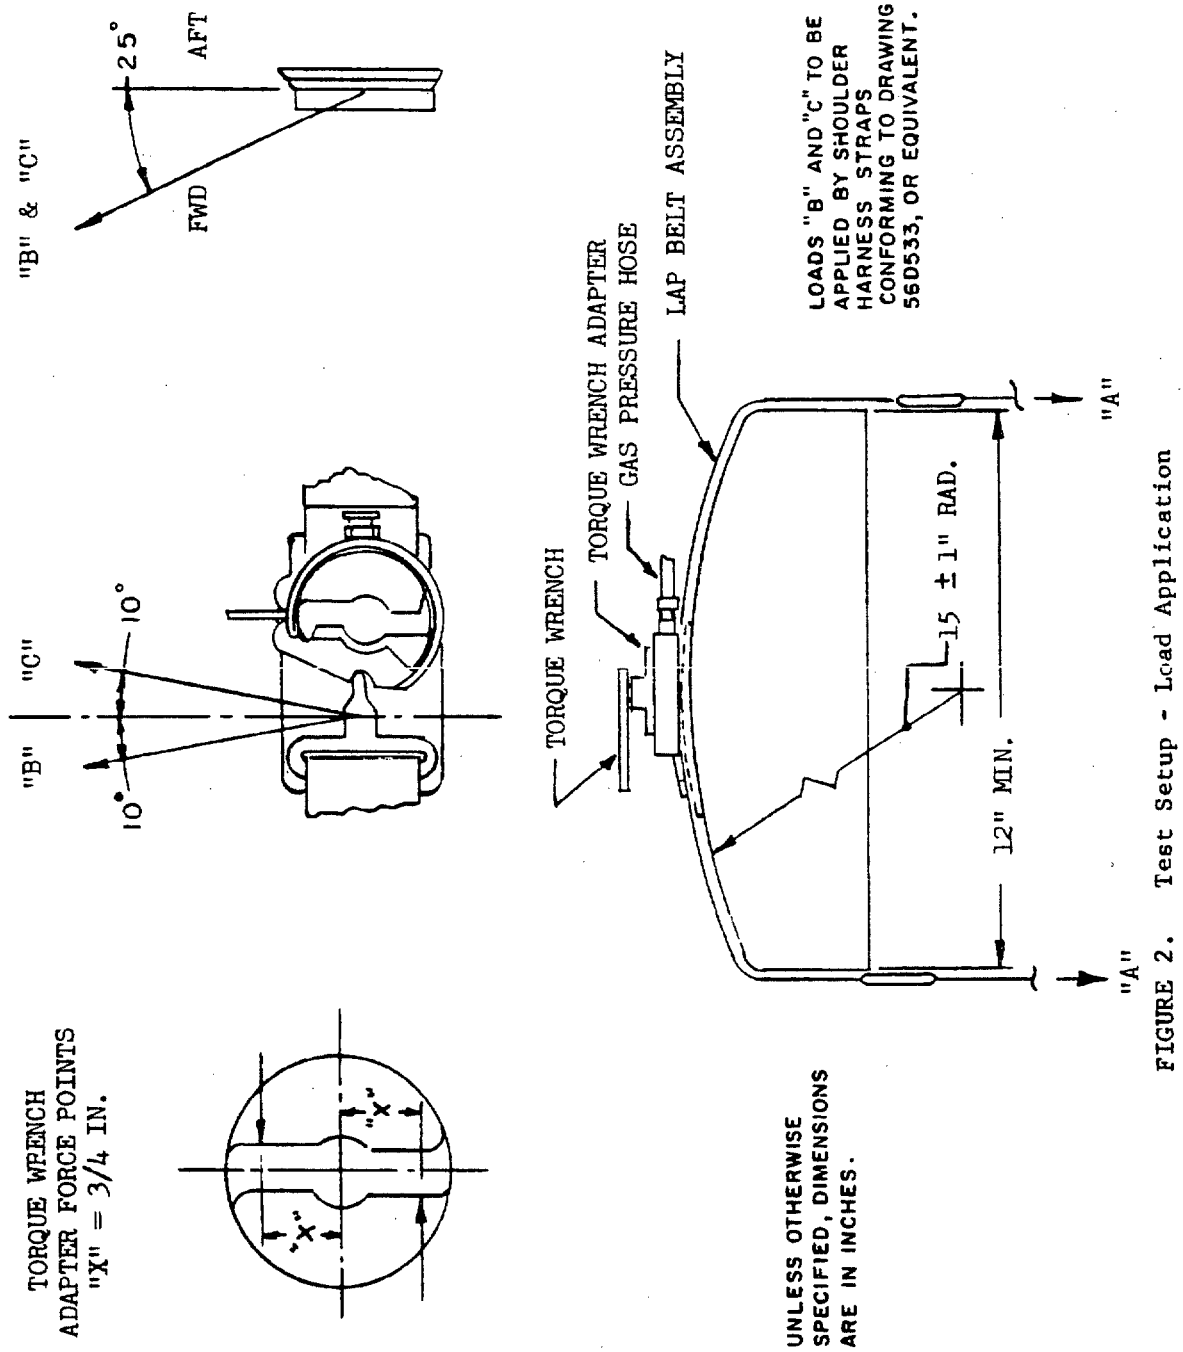


FIGURE 2. Test Setup - Load Application

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

4.6.4 Automatic operation and separation and pressure retention. The lap belt buckle shall be tested for automatic operation and separation at high and low temperatures and for pressure retention as specified in 4.6.4.1, 4.6.4.2, and 4.6.4.3. During each of the tests, the following data shall be recorded: A pressure-time curve for pressure buildup in the lap belt buckle, automatic release actuation pressure, and the time from initiator actuation to initial buckle pressure buildup, latch release, and buckle separation. During the tests specified in 4.6.4.3, a pressure-time curve for pressure buildup in the simulated rotary actuator shall be recorded.

4.6.4.1 High temperature. Five tests shall be conducted. During the tests the lap belt buckle assembly, with an M12 initiator (or equivalent) and a 36-inch length of pressure transmission hose (MIL-H-25579) attached, shall be subjected to a temperature of 200°F for a period of at least 3 hours. While still at this temperature, the following loads shall be applied to the buckle as shown on figure 2: Load A shall be 1,800 pounds; loads B and C shall be 100 pounds. The initiator shall then be actuated. The automatic latch shall release, and the separating components of the buckle shall separate smoothly and quickly without evidence of binding.

4.6.4.2 Low temperature. Five tests shall be conducted. Before each test, the ballistic circuit assembly as shown on figure 3 shall be subjected to a temperature of -65°F for a period of at least 3 hours. While still at this temperature, the following loads shall be applied to the buckle as shown on figure 2: Load A shall be 1,800 pounds; loads B and C shall be 100 pounds. The initiator shall then be actuated. The automatic latch shall release, and the separating components of the buckle shall separate smoothly and quickly without evidence of binding. A pressure surge of at least 1,000 psig shall be recorded at the simulated rotary actuator.

4.6.4.3 Pressure retention. Five tests shall be conducted with no load on the lap belt buckle. Before each test, the ballistic circuit assembly as shown on figure 3 shall be subjected to a temperature of -65°F for a period of at least 3 hours. The initiator shall then be actuated. The automatic latch shall release, the separating components of the buckle shall separate, and a pressure surge of at least 1,000 psig shall be recorded at the simulated rotary actuator.

4.6.5 Actuation pressure. Five tests at -65°F and five tests at +200°F shall be conducted with no load on the lap belt buckle to demonstrate the automatic release actuation pressure. Five tests at -65°F and five tests at +200°F shall be conducted to demonstrate the automatic release actuation pressure while the buckle is subjected to the following loads as shown on figure 2: Load A shall be 1,800 pounds; loads B and C shall be 0 pound. To determine the actuation pressure, a nitrogen gas source shall be attached to the automatic release by a length of pressure transmission hose. At the conclusion of the soak period and after the applicable load is applied, the nitrogen pressure shall be gradually increased until the buckle unlatches and the pressure shall be recorded. The pressure required to unlatch the buckle shall meet the requirements specified in 3.6.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

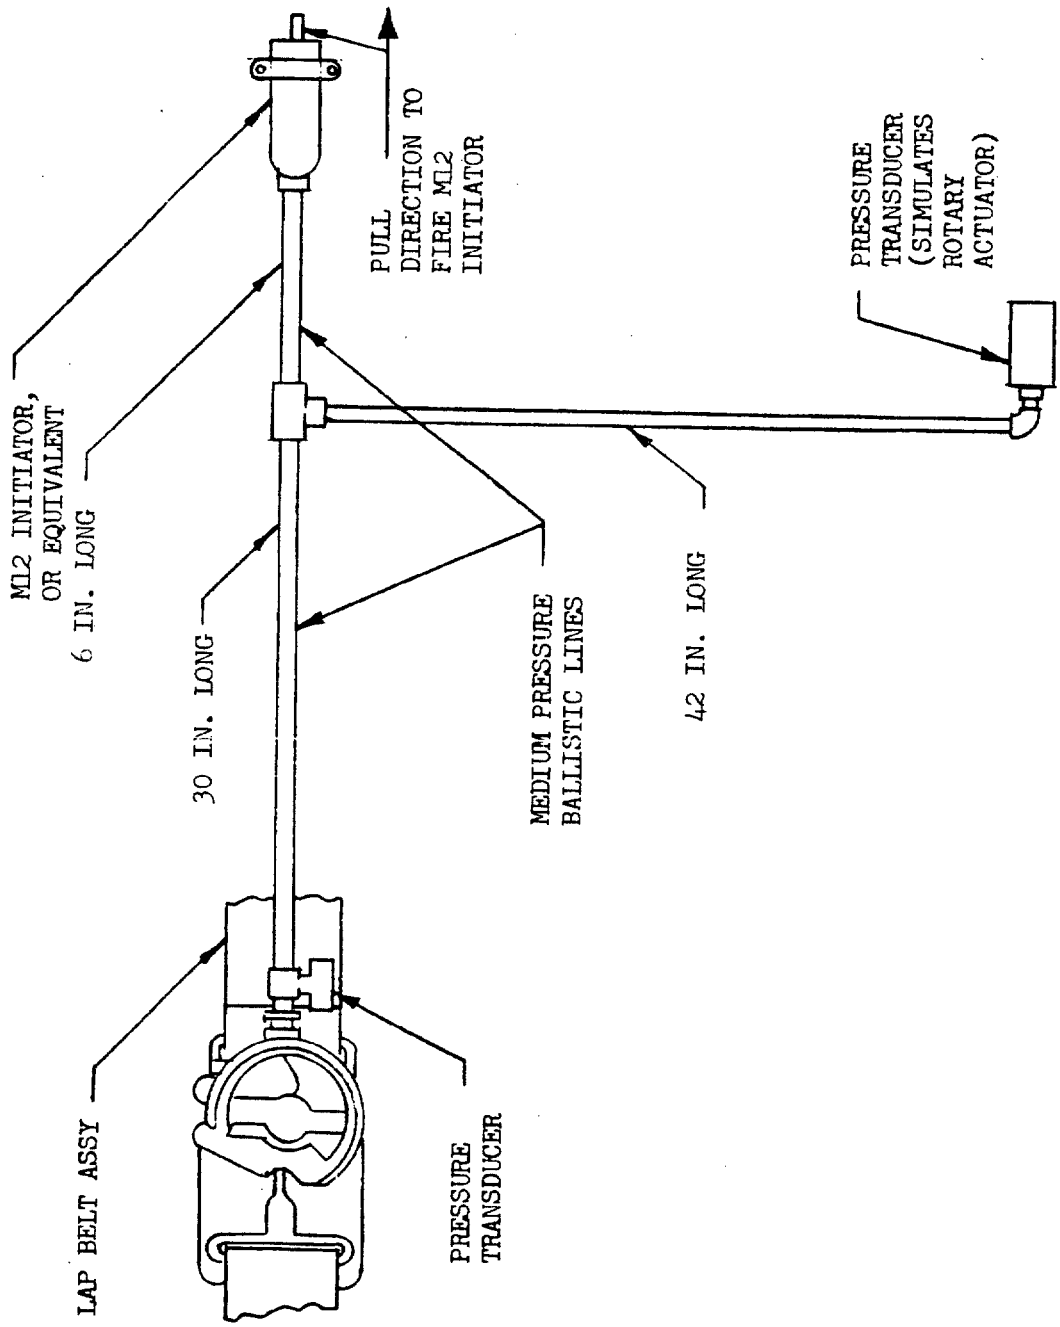


FIGURE 3. Ballistic Circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

4.6.6 Vertical drop. Three lap belt assemblies shall be dropped from a height of not less than 12 feet onto a concrete slab, one each under one of the following conditions but no two buckles under the same conditions. Condition A shall be in such a manner that the forces generated by the impact will tend to actuate the automatic release. Condition B shall be in such a manner that the forces generated by the impact will tend to oppose actuation of the automatic release. Condition C shall be in a random manner. Following each test, an ambient, no-load actuation pressure test in accordance with 4.6.5 shall be conducted on each buckle. The resultant actuation pressure shall be 450 ±100 psig.

4.6.7 Functional test of buckle. The lap belt shall be subjected to the following static loads as shown on figure 2: Load A shall be 2,880 pounds; loads B and C shall be 1,800 pounds. There shall not be any structural or mechanical failure of the belt. The loads on the buckle shall then be reduced to the following: Load A shall be 100 pounds; loads B and C shall be 50 pounds. The buckle shall then be automatically operated with an M12 initiator, or equivalent. Satisfactory release and separation shall occur.

4.6.8 Functional test of lap belt. The complete lap belt assembly shall be subjected to a static load of 2,000 pounds as shown on figure 2 (load A shall be 2,000 pounds; loads B and C shall be 0 pound) to demonstrate compliance with the strength requirements specified in 3.6.7. After the 2,000-pound static load has been applied to the belt assembly, the automatic release prepositioning shear pin shall be removed, and the belt assembly shall be placed in a vertical position. An internal gas pressure of 50 to 100 psig shall be applied to the gas chamber of the automatic release. The automatic latch shall release, and the lower half of the belt assembly shall fall from the automatic release. Any belt which requires more than 100 psig to actuate shall be rejected.

4.6.8.1 Manual opening force tests. Manual opening forces shall be measured by use of a torque wrench adapter conforming to figure 2. The force value required shall be derived by dividing the inch-pound torque value by .75 inch.

4.6.8.1.1 No-load opening force. With the lap belt buckle free from any external loads, it shall be manually unlatched. The force required to unlatch the buckle shall be measured and recorded and shall be not less than 8 pounds nor more than 12 pounds.

4.6.8.1.2 Static-load opening force. Tests shall be conducted in accordance with subparagraphs a, b, and c:

a. The following loads shall be applied to the lap belt buckle as shown on figure 2: Load A shall be 400 pounds; loads B and C shall be 0 pound. The buckle shall be manually unlatched and the force recorded. The force required shall be not more than 45 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

b. A load of 50 +10, -0 pounds shall be applied at position A as shown on figure 2. The gold key and the link half of the assembly shall release simultaneously, or if the gold key is released first, then the belt latch shall release within a 2° additional handle rotation.

c. A load of 75 ±5 pounds shall be applied as shown on figure 4. The load shall not cause the gold key to disengage from the buckle. Exertion of the load shall not cause any damage to or deformation of the belt assembly or its components.

4.7 Preparation for delivery. The packaging, packing, and marking shall be examined to determine conformance to section 5 or the documents referenced therein.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).


5.1.1 Level A. Each belt shall be packaged in accordance with MIL-P-116, method III, in a snug-fitting unit container conforming to PPP-B-676.

5.1.2 Level C. The belts shall be packaged in a manner that will afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity for immediate use. This level may conform to the supplier's commercial practice provided the latter meets the requirements of this level.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Belts packaged as specified in 5.1.1 shall be packed in exterior overseas-type shipping containers conforming to PPP-B-636 or PPP-B-576. Insofar as practicable, exterior shipping containers shall be of uniform shape and size, of minimum cube and tare consistent with the protection required, and shall contain identical quantities. The gross weight of each shipping container shall not exceed the limitation of the container specification. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. Containers conforming to PPP-B-576 shall be provided with a case liner conforming to MIL-L-10547 and sealed in accordance with the appendix thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

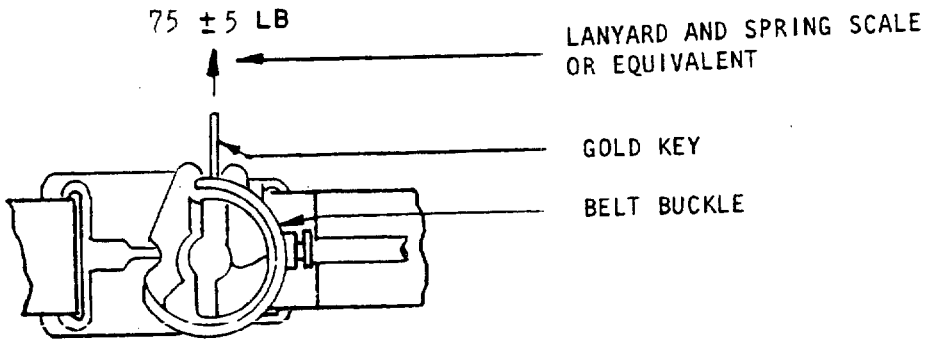

Fixture shall provide for exerting load as shown. Load shall not cause key to disengage from belt buckle.

FIGURE 4. Gold Key Static Load Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Belts packaged as specified in 5.1.1 shall be packed in domestic-type exterior shipping containers conforming to PPP-B-636 or PPP-B-576. Exterior shipping containers shall be of minimum cube and tare consistent with the protection required. Insofar as practicable, exterior shipping containers shall be of uniform shape and size and contain identical quantities. The gross weight of each shipping container shall not exceed the limitation of the container specification. Containers shall be closed and strapped in accordance with the applicable specification or appendix thereto. When fiberboard containers are used, such containers shall meet the special requirements table of PPP-B-636, as applicable.

5.2.3 Level C. The belts shall be packed in a manner that will afford adequate protection at the lowest rate against damage during direct domestic shipment from the supply source to the first receiving activity for immediate use. This level shall conform to applicable carrier rules and regulations and may be the supplier's commercial practice provided the latter meets the requirements of this level.

5.3 Marking of shipments. Interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The lap belts covered by this specification are intended for use in USAF aircraft ejection seats.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Type of lap belt required (see 1.2)

c. Provisions for Government-furnished property (see 3.11)

d. Quality conformance procedures in accordance with T-115-1 of AFSCM/AFLCM 310-1 listed on the Contractor Data Requirements List (DD Form 1423)

e. Applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Disposition of expended initiators. After the initiators are fired, the contractor should dispose of the initiators in accordance with the instructions of the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

6.4 Color samples. Samples of USAF color shades specified on the applicable drawings may be obtained from the procuring activity or as directed by the contracting officer.

Custodian:
Air Force - 11

Review activity:
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 1680-F263

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MAT[illegible]AL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

AFLC—WPAFB—OCT 67 2M

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:34Z
Check the source to verify that this is the current version before use.