MILITARY SPECIFICATION

FILM, MICROFICHE, 48X

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification contains requirements for producing distribution fiche (see 6.3.6) at a 48:1 reduction ratio.

1.2 Classification. The 105.0 $^{+0}_{-0.75}$ mm X 148.0 $^{+0}_{-1.0}$ mm fiche shall be of the following types, classes, and kinds, as specified (see 6.2):

Type I. Silver-halide fiche.

Type II. Diazo fiche.

Type III. Vesicular fiche.

Type IV. Other film that satisfies the performance requirements of this specification.

Class 1 Original camera master fiche first generation (see 6.3.4).

Class 2 Intermediate copy fiche.

Class 3 Distribution copy fiche.

Kind N Negative form (clear characters, numeral, etc. on a dark background).

Kind P Positive form (dark characters, numeral, etc. on a light background).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-F-315 - Film, Diazotype, Sensitized (Direct Image Microforms).
L-F-00320 - Film, Thermal, Developing.
L-F-334 - Film, Photographic, Roll, Microfilm (black and white).
QQ-S-781 - Strapping, Steel, Flat and Seals.
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-corner.
PPP-B-636 - Boxes, Shipping Fiberboard.
PPP-B-676 - Boxes, Setup.
PPP-T-60 - Tape: Packaging, Waterproof.
PPP-T-76 - Tape, Pressure-Sensitive Adhesive, Paper, (For Carton Sealing).

MILITARY

MIL-P-116 - Preservation-Packaging, Method of.
MIL-B-43014 - Boxes: Water Resistant Paperboard: Folding, Set-up, and Metal-Stayed.
MIL-C-45662 - Calibration System Requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:48Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC.

PH1.25-1965 - Safety Photographic Film, Specifications for.
PH1.41-1973 - Photographic Film for Archival Records, Silver-Gelatin Type, on Polyester Base, Specifications for.
PH2.19-1959 - Diffuse Transmission Density.

(ANSI standards may be obtained from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 First article. Film furnished under this specification shall be products which have been tested and have passed the first article inspection specified in 4.5.

3.2 Material. All film procured under this specification shall be made of safety stock as defined by ANSI Standard PH1.25-1965.

3.3 Design and construction. All film shall be of the design and construction specified herein.

3.3.1 Microfilm characteristics.

Type I, Silver-Halide fiche shall be in accordance with L-F-334 (except for size) or PH1.41-1973 when applicable.

Type II. Diazo fiche shall be in accordance with L-F-315 (except for size).


Type III, Vesicular fiche shall be in accordance with L-F-320 (except for size).

3.3.2 Title area. The title area (see 6.3.10) for each fiche shall be located above row A (see 6.3.9) and contain eye legible characters at least 3 mm high for a one line title. Characters shall not be "filled-in" or "light" to the extent they are illegible.

3.3.3 Pagination. When the fiche title is right reading, the placement of the first microimage shall be located completely within the theoretical grid lines in the top left frame. Succeeding images shall appear in sequence from top to bottom and from left to right. When an index to the fiche is provided, the placement of the index shall be at the bottom right frame of the grid area. Additional index frames shall appear in reverse sequence subtracting from the allotted format.

3.3.4 Cutting mark. Each class 1 and 2 fiche shall have a cutting mark to provide for automatic cutting of processed 105 mm roll film into fiche sheets. This cutting mark shall be 3 mm square, and the center of the square shall be located 32 mm from the left edge of the fiche along the bottom (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:48Z
Check the source to verify that this is the current version before use.

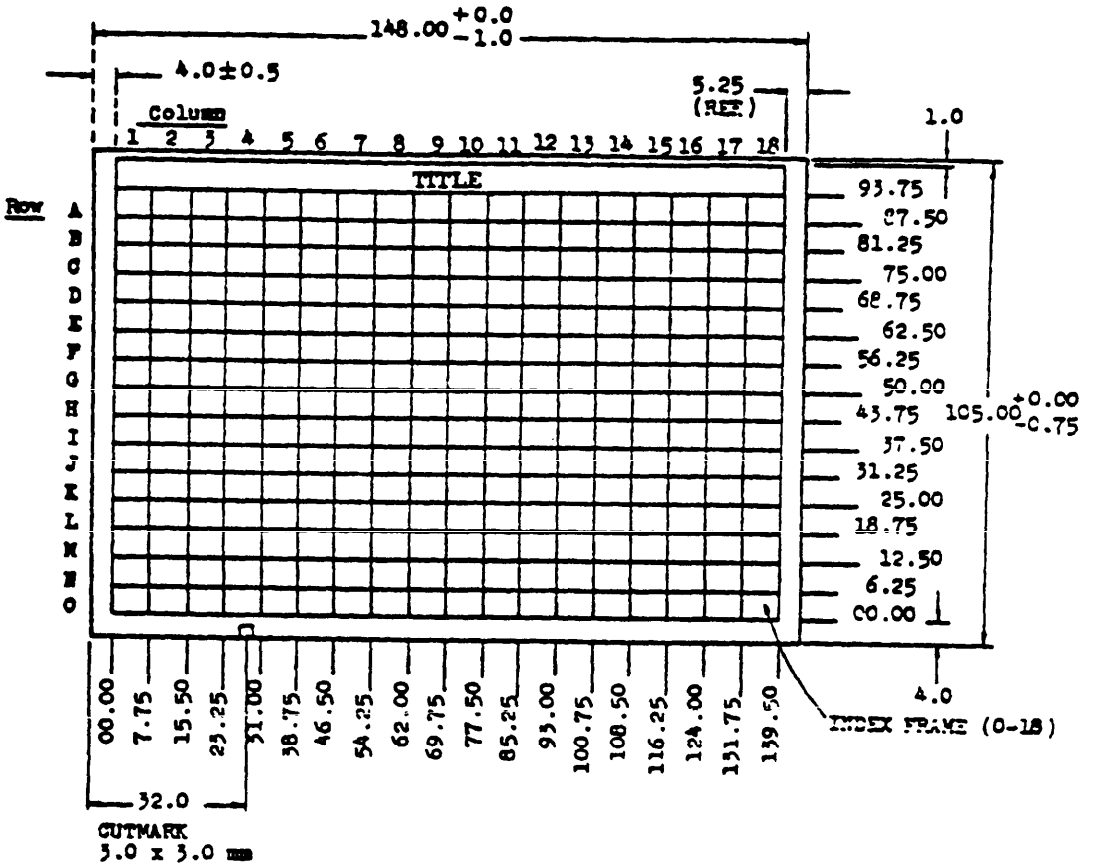

NOTES:
1. Page size 14 x 11 in. (text 13.20 x 10.67 in.)
2. Effective reduction 48X ±2%.
3. Format 18 columns x 15 rows. 270 frames. (See 6.3.1 and 6.3.3).
4. Dimensions are in millimeters, except as noted.
5. Grid lines shown do not appear on microfiche.

48X

FIGURE 1. Fiche format.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:48Z
Check the source to verify that this is the current version before use.

3.3.5 Protective coating (optional). When specified (see 6.2), by the procuring activity, type I fiche shall have a protective coating applied to the emulsion after processing. The protective coating shall not adversely affect in any manner the resolution of or the ability to produce further film generations. Coating used must remain within clear line density tolerances and shall entirely cover the emulsion of each fiche. The protective coating shall not contain any streaks, bubbles, lap marks, lumps, etc., or other foreign material.

3.3.6 Fiche format. Each fiche shall contain a horizontal title area along the length above the microimage (see 6.3.6) frames. The grid configuration of frames shall be 15 horizontal rows and 18 vertical columns (see figure 1).

3.3.7 Trailer fiche identification (see 6.3.11). When trailer fiche are used, each fiche in the set including the first one shall be sequentially identified. This information shall appear in the right-most portion of the title area.

3.4 Fiche size and thickness. When tested as specified in 4.7.2, the overall dimensions of the distribution fiche shall be $105.0\ ^{+0.0}_{-0.75}$ mm X $148.00\ ^{+0}_{-1.0}$ mm (approximately 4" x 6"). The thickness of films used may vary from 0.004 to 0.008 inch for polyester base film and 0.005 to 0.009 inch for acetate base film. When colored backing material is specified (see 6.2) to increase legibility of the title area, it shall not exceed 0.0005 inch thickness.

3.5 Reduction ratio. When tested as specified in 4.7.3, the effective reduction ratio (see 6.3.8) for fiche shall be 48:1 ± 1X.

3.6 Microimage placement and orientation. When tested as specified in 4.7.4, microimages shall be located completely within the theoretical grid lines as shown in figure 1. When the fiche title is right reading and upright, microimage data lines shall be right reading and upright.

3.7 Curl and bow. When film is tested as specified in 4.7.5, the curl or bow of a sheet of distribution fiche shall have no part more than 0.25 inch above a flat surface.

3.8 Density. When tested as specified in 4.7.6, the densities shall be as follows:

(a) Type I, Silver-Halide fiche:
Class 1, not applicable
Class 2, not applicable
Class 3, (Kind N)
D max 1.50 min
D min .20 max

(b) Type II, Diazo fiche:
Class 1, not applicable
Class 2, not applicable
Class 3, (Kind N)
D max 1.40 min
D min .20 max

(c) Type III, Vesicular fiche:
Class 1, not applicable
Class 2, not applicable
Class 3, (Kind N)
D max 1.80 min
D min .35 max

3.9 Reproducibility (class 3). When fiche is tested as specified in 4.7.7, it shall be of sufficient quality to produce a legible paper print.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:48Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. All types and classes of fiche shall be free of scratches, holes, tears, finger marks, blisters, processing stains, foreign material, or any other defect that might adversely affect the use and/or quality of subsequent reproductions. Microimages shall not be obscured, illegible, or out-of-focus.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Test equipment and inspection facilities. Test and measuring equipment and inspection facilities of sufficient accuracy, quality and quantity to permit performance of the required inspection shall be established and maintained by the supplier. The establishment and maintenance of a calibration system to control the accuracy of the measuring and test equipment shall be in accordance with MIL-C-45662.

4.2 Classification of inspections. The inspections specified herein are classified as follows:

(a) Materials inspection (see 4.3).
(b) First article inspection (see 4.5).
(c) Quality conformance inspection (see 4.6).

4.3 Materials inspection. Materials inspection shall consist of certification supported by verifying data that the materials used in fabricating the film are in accordance with the applicable referenced specifications or requirements prior to such fabrication.

4.4 Inspection conditions. Unless otherwise specified, sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105. The manufacturer's sampling for inspection and acceptance procedures may be utilized providing such sampling for inspection and acceptance methods will assure quality equal to or better than that obtained by following the provisions set forth in MIL-STD-105, and provided the manufacturer's methods have been approved by the procuring activity.

4.5 First article inspection. First article inspection shall be performed by the supplier, after award of contract and prior to production, at a location acceptable to the Government. First article inspection shall be performed on sample units which have been produced with equipment and procedures normally used in production. First article approval is valid only on the contract or purchase order under which it is granted, unless extended by the Government to other contracts or purchase orders.

4.5.1 Sample size. Three samples selected from a first article run of 100 fiche of the same classification and information, or 10 fiche sets of the same information as applicable in accordance with the following procedure:

1 sample from the beginning of the run
1 sample from the middle of the run
1 sample from the last part of the run

4.5.2 Inspection routine. The samples shall be subjected to the inspections and examinations specified in table I.

4.5.3 Failures. One or more failures or defects shall be cause for refusal to grant first article approval.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:48Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection.

Examination or test	Requirement paragraph	Method paragraph
Visual examination	3.2, 3.3, and 3.10	4.7.1
Fiche size and thickness	3.4	4.7.2
Reduction ratio	3.5	4.7.3
Microimage placement and orientation	3.6	4.7.4
Curl and bow	3.7	4.7.5
Density	3.8	4.7.6
Reproducibility	3.9	4.7.7

4.6 Quality conformance inspection.

4.6.1 Inspection of product for delivery. Inspection of product for delivery shall consist of the inspection shown in table II.

TABLE II. Inspection of product for delivery.

Examination or test	Requirement paragraph	Method paragraph	Inspection level	AQL (percent defective)
Visual examination	3.2, 3.3, and 3.10	4.7.1	General inspection level II	2.5
Fiche size and thickness	3.4	4.7.2	S-2	4.0
Reduction ratio	3.5	4.7.3	1 each lot	
Microimage placement and orientation	3.6	4.7.4	S-2	2.5
Curl and bow	3.7	4.7.5	S-4	4.0
Density	3.8	4.7.6	S-2	4.0
Reproducibility	3.9	4.7.7	2 each lot	

4.6.1.1 Inspection lot. An inspection lot shall consist of all the production distribution fiche produced to fulfill each individual Government print order. Sampling unit shall consist of all frames within the fiche (up to 270). Sample shall consist of up to 4 percent of the total lot submitted for inspection.

4.6.1.2 Sampling plan. Statistical sampling and inspection shall be in accordance with MIL-STD-105 for the inspection levels (see table II). The acceptable quality level (AQL) shall be as specified in table II.

4.6.1.3 Rejected lots. If an inspection lot is rejected, the supplier may screen out and replace the defective units and resubmit for reinspection. Resubmitted lots shall be inspected using tightened inspection. Such lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

4.6.2 Inspection of preparation for delivery. The sampling and inspection of the preservation-packaging and interior package marking shall be in accordance with the groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:48Z
Check the source to verify that this is the current version before use.

4.7 Methods of examination and test.

4.7.1 Visual examination (see 3.2, 3.3, and 3.10). The fiche or fiche sets shall be examined, as applicable, for defects. Examination shall be performed at any adequate magnification. All defects shall be verified with at least 48X magnification.

4.7.2 Fiche size and thickness (see 3.4). An examination shall be made of the end item to determine compliance with dimensions specified.

4.7.3 Reduction ratio (see 3.5). Reduction ratio may be determined by any suitable method acceptable to the Government.

4.7.4 Microimage placement and orientation (see 3.6). Three frames shall be selected randomly on the distribution fiche. All measurements shall use the bottom edge and the bottom left-hand corner of the fiche as reference.

4.7.5 Curl and bow (see 3.7). The distribution fiche shall be placed convex side down, on a flat surface for at least 6 hours in an atmosphere of 70°F and a 50 percent relative humidity.

4.7.6 Density (see 3.8). All densities mentioned in this specification are gross densities. The density measuring techniques shall be as follows:

4.7.6.1 Type I, class 3. The background density test shall be performed on type I fiche in accordance with ANSI Standard PH2.19-1959. The combined accuracy and precision of densitometers shall be maintained so that measurements of diffuse density, type VI-b, defined in ANSI Standard PH2.19-1959, are within the following tolerances: ±.01 density units at density levels up to and including 1.00 and ±.015 density units at density levels greater than 1.00. This shall be accomplished by determining the accuracy of densitometers at least once each week at density levels in the range of 0.05 to 0.30 and 1.00 to 1.20 using standard density patches. The calibration density patches should be prepared for the types of films used in the fiche system. Calibration is then to be made either by adjusting the densitometers used to read accurately in terms of the standard patches or by adding or subtracting the observed differences from the designated densities of these patches. Sufficient readings of calibration patches shall be made to insure conformity with the above tolerances.

4.7.6.2 Type II, class 3, kind N. Visual diffuse (type VI-b) as measured by the method described in ANSI Standard PH2.19-1959.

NOTE: Densitometers utilizing a photo tube with an S4 response generally require a Wratten 106 filter plus an IR Corning 4-94 infrared rejection filter, and a 2 mm aperture.

4.7.6.3 Type III, class 3, kind N. Density shall be measured per L-F-00320.

4.7.7 Reproducibility test (class 3) (see 3.9). Two successive microimages shall be selected at random on the sample fiche. Paper prints shall be made using an enlargement ratio of 100 to 75 percent of 48:1.

5. PREPARATION FOR DELIVERY

5.1 Preservation-packaging. Preservation-packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Fiche film shall be cleaned in accordance with MIL-P-116, process C-1.

5.1.1.2 Drying. Fiche film shall be dried in accordance with MIL-P-116.

5.1.1.3 Preservation application. Preservatives shall not be used.

Source: https://assist.dla.mil -- Downloaded: 202640-23T04:48Z
Check the source to verify that this is the current version before use.

5.1.1.4 Unit packaging. Each complete set of fiche film shall be packaged in accordance with MIL-P-116, submethod IC-1 insuring compliance with the general requirements paragraph under methods of preservation (unit protection) and the physical protection requirements paragraph therein. The fiche film shall be protected from bending, curling or distortion by the use of paperboard or fiberboard stiffeners.

5.1.1.5 Intermediate packaging. Fiche film, packaged as specified in 5.1.1.4, shall be placed in intermediate containers conforming to PPP-B-566 or PPP-B-676. Intermediate containers shall be uniform in size, shape and quantities, shall be of minimum tare and cube and shall contain multiples of five unit packages, not to exceed 50 unit packages. No intermediate packaging is required when the total quantity shipped to a single destination is less than 50 unit packages or when supplementary containers are used.

5.1.2 Level C. Fiche film shall be clean, dry and packaged in a manner that will afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. The packaged fiche film shall be packed in fiberboard containers conforming to PPP-B-636, class weather resistant, style optional, special requirements. In lieu of the closure and waterproofing requirement in the appendix of PPP-B-636, closure and waterproofing shall be accomplished by sealing all seams, corners and manufacturer's joint with tape, two inches minimum width, conforming to PPP-T-60, class 1 or PPP-T-76. Banding (reinforcement requirements) shall be applied in accordance with the appendix to PPP-B-636 using nonmetallic or tape banding only.

5.2.2 Level B. The packaged fiche film shall be packed in fiberboard containers conforming to PPP-B-636, class domestic, style optional, special requirements. Closures shall be in accordance with the appendix thereto.

5.2.3 Level C. The packaged fiche film shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. These packs shall conform to the applicable carrier rules and regulations.

5.3 Marking. In addition to any special marking required by the contract or purchase order (see 6.2), each unit package, intermediate and exterior container shall be marked in accordance with MIL-STD-129. Interior packages containing class 1 (camera fiche) film shall also be marked "Avoid Finger Marking or Mishandling of Enclosed Master Camera Film".

5.4 General.

5.4.1 Exterior containers. Exterior containers (see 5.2.1, 5.2.2, and 5.2.3) shall be of a minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Army procurements.

5.4.2.1 Level A intermediate packaging. Containers conforming to PPP-B-566 or PPP-B-676 shall be overwrapped with waterproof barrier materials or shall conform to MIL-B-43014 (see 5.1.1.5).

5.4.2.2 Levels A and B packing. For level A, B, and C packing when quantities per destination are less than a unitized load, the fiberboard containers shall not be banded but shall be placed in a close fitting box conforming to PPP-B-601, overseas type; PPP-B-621, class 2, style 4, or PPP-B-585, class 3, style 2 or 3. Closure and strapping shall be in accordance with applicable container specification except that metal strapping shall conform to QQ-S-781, type 1, finish A. When the gross weight exceeds 200 pounds or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids (laid flat) shall be applied in accordance with the requirements of the container specification. If not described in the container specification, the skids shall be applied in a manner which will adequately support the item and facilitate the use of material handling equipment. For level B packing, fiberboard boxes shall be weather resistant as specified in level A and the containers shall be banded (see 5.2.1 and 5.2.2). When fiberboard containers are used for level C shipments, they shall be weather-resistant unless there are over-riding factors which make them less economical than domestic fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:48Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Fiche procured to this specification are for use with 48:1 viewers and viewer/printers.

6.2 Ordering data. Procurement documents shall specify the following:

(a) Title, number, and date of this specification.
(b) Quantities and kinds of fiche required (see 1.2).
(c) Delivery data and destination(s) for fiche.
(d) Interior and exterior packaging (see 5.1 and 5.2).
(e) Protective coating (see 3.3.5).
(f) Levels of preservation-packaging and packing required (see 5.1 and 5.2).
(g) Special marking, if required (see 5.3).
(h) Title area colored backing, color required (see 3.4).

6.3 Definitions.

6.3.1 Column. A vertical series of frames on a fiche.

6.3.2 COM:

(a) Computer output microfilm. Microfilm or fiche containing data produced by a recorder from computer generated electrical signals.
(b) Computer output microfilmer. A recorder device which converts computer digital data into human readable language and records it on microfilm or fiche.
(c) Computer output microfilming. A method of converting digital data from a computer into human readable images on microfilm or fiche.

6.3.3 Frame. A geometric subdivision of the fiche grid. That area of a COM produced fiche which contains microimage information, without margins.

6.3.4 Generation. A measure of the remoteness of the copy from the original material. The picture taken of a document or cathode ray tube is termed first generation microfilm (camera master). Copies made from this first generation are termed second generation, and copies from the second generation are termed third generation.

6.3.5 Header. The area at the top of the microfiche for eye readable characters, title, sequence number, etc.

6.3.6 Microimage. A unit of information, such as a page of text or drawing, too small to be read without magnification.

6.3.7 Fiche. A sheet of microfilm containing multiple microimages in grid pattern. The fiche normally displays the title of the recorded data in a size large enough to read without magnification.

6.3.8 Reduction ratio, effective. A measure of the number of times an imaginary document would have been reduced to equal the size of the COM generated microimage, expressed as 48:1.

6.3.9 Row. A horizontal series of frames on a fiche.

6.3.10 Title. The descriptive identification of data recorded in the microimage areas of the fiche.

6.3.11 Trailer fiche. A continuation fiche on which are recorded images, from a multipage document, which exceed the capacity of a single fiche sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:48Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - SA
Air Force - 70

Review activities:
Army - MI, AT, ME, AV, WC
Navy - AS, EC, YD, OS, SH, MC
Air Force - 07
DSA - ES

User activities:
Army - SM, TM, IH, GL
Navy - NM
Air Force -

Preparing activity:
DSA - ES

(Project 6750-0323)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Electronics Supply Center
1507 Wilmington Pike
Dayton, OH 45444-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYYYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-02-23T04:48Z
Check the source to verify that this is the current version before use.