MILITARY SPECIFICATION SHEET


SYNCHRO, TORQUE TRANSMITTER

TYPE 26V-08TX4a

(THESE SYNCHROS ARE FOR REPLACEMENT PURPOSES ONLY; NOT RECOMMENDED FOR NEW DESIGNS.)

The complete requirements for procuring the synchro described herein shall consist of this document and the latest issue of MIL-S-20708.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

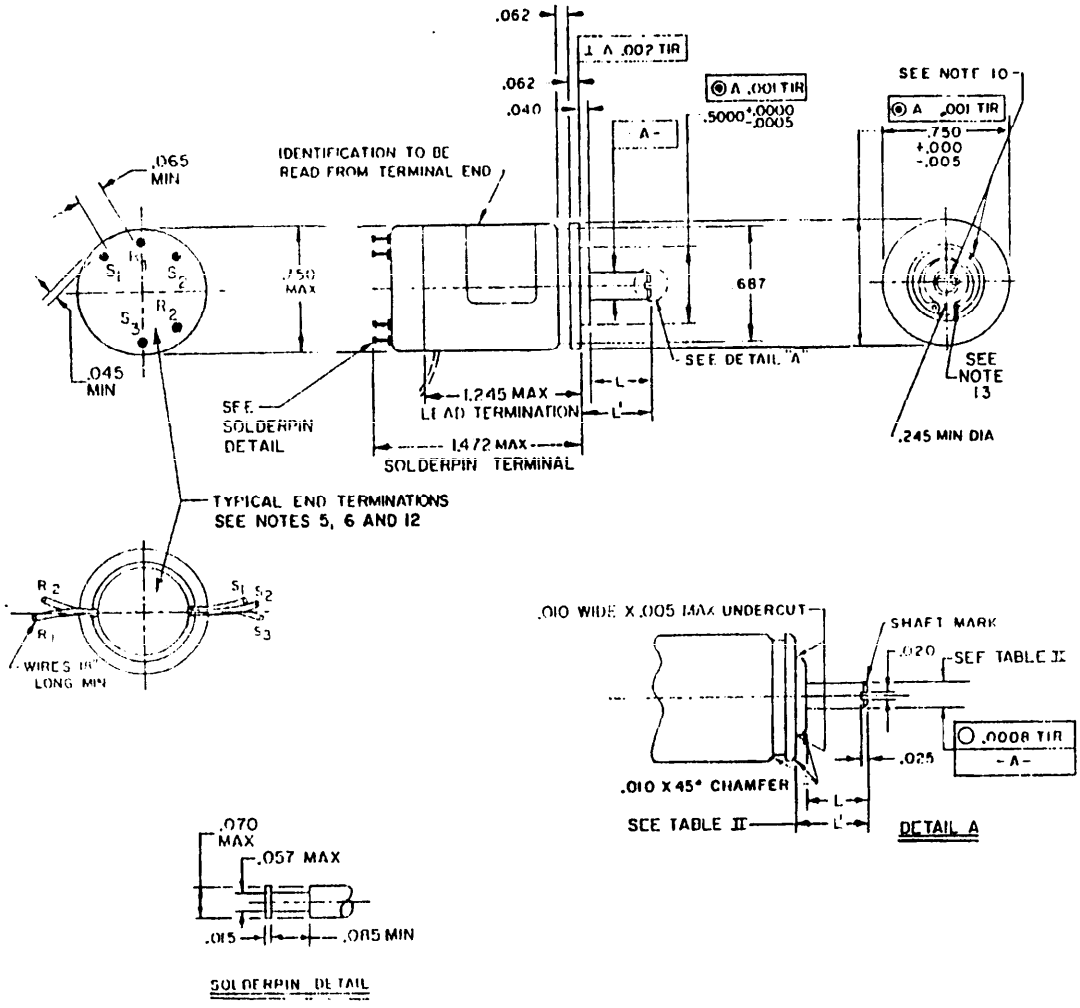

FSC 5990

Source: https://assist.dla.mil -- Downloaded: 20260-19T08:25Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±2° on angles.
3. Perpendicularity and concentricity shall be measured with the unit in a vertical position supported by the shaft, then the housing rotated.
4. Leads shall be type E-28.
5. Terminal lead wires shall depart through the back surface of the terminal end of the synchro in any acceptable manner. The terminal pins shall be marked on the unit as indicated.
6. Minor variations of unit configuration are permitted for undimensioned design detail.
7. Wire lead stress shall be performed as a qualification test.
8. Solder pin terminal stress shall be tested in accordance with MIL-STD-202, Method 211 as a qualification test. The terminals shall be capable of withstanding, without damage or loosening, a steady pull of the force specified in any direction by a wire fastened in the normal manner. Internal connections to terminals shall be welded or soldered with high temp solder, SN-5 per QQ-S-571.
9. Pending issuance of a qualified products list (QPL) a sample of the synchros to be furnished under this specification shall be subjected to the preproduction tests as specified in MIL-S-20708.
10. Mark on housing is to match shaft mark within 10° when rotor is set at approximately synchro zero and will bear no relation to the centerlines shown on this drawing.
11. Housing material shall be of corrosive resistive material, e.g., stainless steel or aluminum.
12. Decals are permitted for terminal designation.
13. The front retainer shall be threaded or a snap ring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:25Z
Check the source to verify that this is the current version before use.

TABLE I

SYNCHRO, TORQUE TRANSMITTER


TYPE 26V-08TX4a

PERFORMANCE REQUIREMENTS AND CHARACTERISTICS

Requirement	Value	Unit	Tolerance
1. Excitation	Rotor	---	---
2. Frequency	400	Hz	±1%
3. Primary voltage	26	Volts	±1%
4. Primary current	110	Milliamps	Maximum
5. Primary power	.54	Watts	Nominal
6. D. C. Resistance:			
Rotor	38 (Reference)	Ohms	---
Stator	12 (Reference)	Ohms	---
7. Impedance:			
Zro	52 + j258	Ohms	R±15%, + jx±10%
Zso	12 + j44	Ohms	R±15%, + jx±10%
Zss	15 + j3 (Reference)	Ohms	---
8. Transformation ratio			
Output/input	0.454	---	±2%
9. Phase shift	8.5 (Lead)	Degrees	±1.5
10. Electrical error	7.0	Minutes	Maximum
11. Null voltage:			
Total	30	Mv rms	Maximum
Fundamental	20	Mv rms	Maximum
12. Torque gradient	.002 (1440)	Oz-In per Degree (Mg-Mm per Degree)	Minimum
13. Friction torque:			
@ 25° C	.04 (3)	Oz-In (Mg-Mm)	Maximum
@ -55° C and + 125° C	.12 (9)	Oz-In (Mg-Mm)	Maximum
14. Radial play	.0004 (Using 4 oz load)	Inches	Maximum
15. End play	.0003-.0008 (Using 8 oz load)	Inches	Min-Max
16. Terminal stress (See note 8)	2	Pound	$^{+2}_{-0}$ Oz
17. Temperature rise	20	°C	Maximum

Part number: The part number consists of the basic number of this specification sheet and a dash number taken from table II.

Example:



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:25Z
Check the source to verify that this is the current version before use.

TABLE II

Dash No.	Shaft diameter (+.0000) (-.0005)	Shaft style	Termination	Shaft length	
				L (ref)	Dim. to first L' mounting flange surface (±.010)
-001	.0900	Plain	Wire leads	.085	.125
-002	.0900	Plain	Wire leads	.250	.290
-003	.0900	Plain	Wire leads	.335	.375
-004	.0900	Plain	Wire leads	.375	.415
-005	.0900	Plain	Wire leads	.435	.475
-006	.0900	Plain	Wire leads	.500	.540
-007	.0900	Plain	Wire leads	.585	.625
-008	.0900	Plain	Wire leads	.625	.665
-009	.0900	Plain	Solder pins	.085	.125
-010	.0900	Plain	Solder pins	.250	.290
-011	.0900	Plain	Solder pins	.335	.375
-012	.0900	Plain	Solder pins	.375	.415
-013	.0900	Plain	Solder pins	.435	.475
-014	.0900	Plain	Solder pins	.500	.540
-015	.0900	Plain	Solder pins	.585	.625
-016	.0900	Plain	Solder pins	.625	.665
-017	.1200	Plain	Wire leads	.085	.125
-018	.1200	Plain	Wire leads	.250	.290
-019	.1200	Plain	Wire leads	.335	.375
-020	.1200	Plain	Wire leads	.375	.415
-021	.1200	Plain	Wire leads	.435	.475
-022	.1200	Plain	Wire leads	.500	.540
-023	.1200	Plain	Wire leads	.585	.625
-024	.1200	Plain	Wire leads	.625	.665
-025	.1200	Plain	Solder pins	.085	.125
-026	.1200	Plain	Solder pins	.250	.290
-027	.1200	Plain	Solder pins	.335	.375
-028	.1200	Plain	Solder pins	.375	.415
-029	.1200	Plain	Solder pins	.435	.475
-030	.1200	Plain	Solder pins	.500	.540
-031	.1200	Plain	Solder pins	.585	.625
-032	.1200	Plain	Solder pins	.625	.665

Custodians:
Army - MU
Navy - AS
Air Force - 85

Review activities:
Army - EL, MI, MU, ME, AT, AV
Navy - SH, AS
Air Force - 11, 85, 17

User activities:
Army -
Navy - SH, MC, CG
Air Force -

Preparing activity:
Air Force - 85

(Project 5990-0161-1)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T08:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFALD.PTS
Gentile AF STation
Dayton OH 45444

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-19T08:25Z
Check the source to verify that this is the current version before use.