MILITARY SPECIFICATION SHEET
SYNCHRO CONTROL DIFFERENTIAL TRANSMITTER, TYPE 26V-08CDX4

This Specification has been Approved by the Naval Air Systems Command Department of the Navy.
(This Synchro is for Replacement Purposes Only Not Recommended for New Design.)

THE COMPLETE REQUIREMENTS FOR PROCURING THE SYNCHRO DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL S-20708.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTIONS ±1 64
DECIMALS : 005 ANGLES ±2°

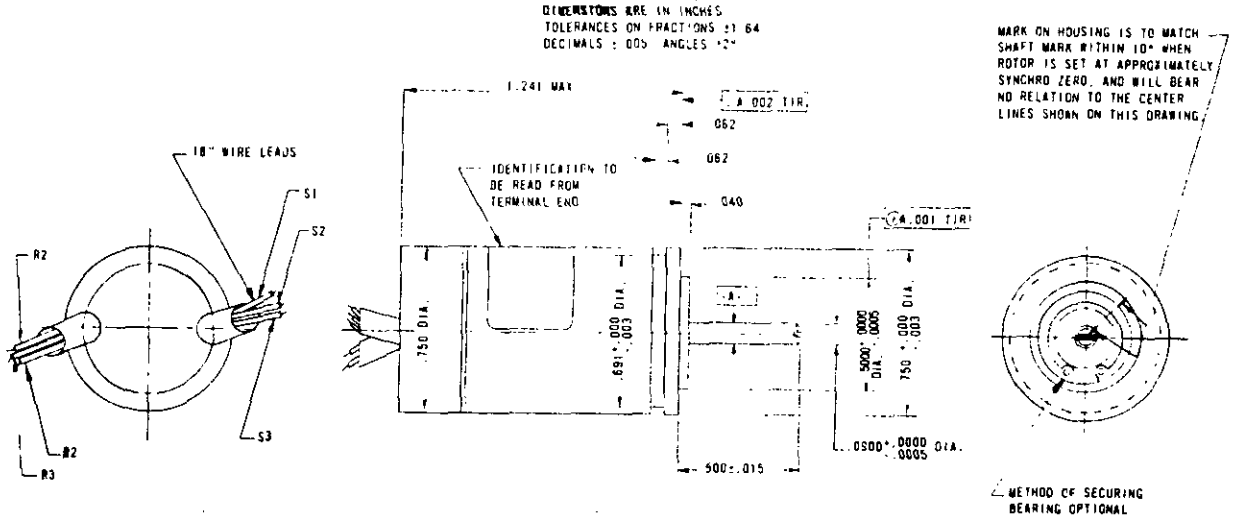

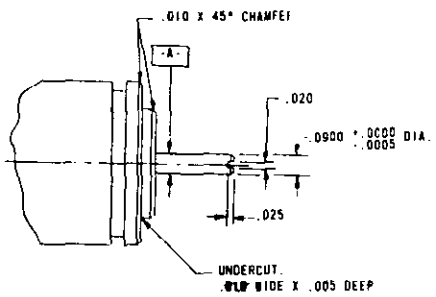

NOTES

1. PERPENDICULARITY AND CONCENTRICITY SHALL BE MEASURED WITH THE UNIT IN A VERTICAL POSITION SUPPORTED BY THE SHAFT, THEN THE HOUSING ROTATED
2. RUNOUT OF FEATURE 'A' (SMOOTH PORTION) OF SHAFT SHALL NOT EXCEED .0008 TIR.
3. END PLAY AND RADIAL PLAY SHALL BE MEASURED DURING REVERSAL OF THE FOLLOWING LOADS
   END PLAY 1-2 POUND RADIAL PLAY 1/4 POUND
4. TERMINAL LEADS SHALL DEPART THROUGH THE BACK SURFACE OF THE TERMINAL END OF THE UNIT IN ANY ACCEPTABLE MANNER.
5. MINOR VARIATIONS OF UNIT CONFIGURATION ARE PERMITTED FOR UNDIMENSIONED DESIGN DETAIL
6. BEARINGS SHALL BE BARRIER COATED AND MARKED IN ACCORDANCE WITH MIL-STD-1334
7. BEARINGS SHALL BE LUBRICATED WITH MIL-L-81846 OIL.
8. THIS UNIT MUST BE CAPABLE OF 3000 HOURS OF ENDURANCE

FSC 5980

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:25Z
Check the source to verify that this is the current version before use.

TABLE I

Requirement	Value	Unit	Tolerance
Frequency	400	Hz	±1%
Primary Voltage	11.8	volts	±3%
Primary Current	30	milliamps	±10%
Primary Power	.073	watts	±20%
Impedance:			
ZRO	109+j362	ohms	R±14.7%+jX±10.2%
ZSO	81+j330	ohms	R±16.05%+jX±10%
ZRS	120+j40	ohms	R±15%+jX±15%
Transformation Ratio	1.154	----	±3%
Phase Shift	8.5(lead)	degree	±1.7
Electrical Error:			
Stator	7.0	minutes	min.-max.
Rotor	5.0	minutes	min.-max.
Null Voltage:			
Total	20	millivolts	maximum
Fundamental	10	millivolts	maximum
Friction Torque:			
25°C	4	gm-cm	maximum
-55°C and +125°C	16	gm-cm	maximum
Radial Play	.0005	inches	maximum
End Play	.0003-.0008	inches	min.-max.
Rotor Moment of Inertia	.082	gm-cm^2	maximum
D.C. Resistance:			
Rotor	98	ohms	±14.7
Stator	64	ohms	±9.6
Sensitivity	206	mv/degree	±7.0
Temperature Rise	20	degrees(C)	maximum

NOTES:

1. The maximum point error shift between room temperature and +71°C, and between room temperature and -54°C shall not exceed three minutes.

2. This component used for A/A24G-39 Electronics Control Amplifier on Contract N00019-73-C-0309. This unit formerly identified as General Electric Drawing 8175W12P009.

Preparing Activity
Navy - AS
Project No. 5990-N053

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974-713-152 4118

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:25Z
Check the source to verify that this is the current version before use.