MIL-S-20708/95B(MU)
26 July 1971
SUPERSEDING
MIL-S-20708/95A(MU)
12 January 1967

MILITARY SPECIFICATION

SYNCHROS, 400 Hz, SIZE 16

1. SCOPE

1.1 This specification covers the detail requirements for 115 volt, 400 Hz, size 16 synchros, type 16TRB4b.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

TT-I-558	Ink, Marking Stencil, Opaque, for Nonporous Surfaces (Metals, Glass, etc.)

Military

MIL-V-173	Varnish, Moisture-and-Fungus Resistant (For the treatment of Communications, Electronic, and Associated Electrical Equipment)
MIL-S-20708	Synchros, General Specification for

STANDARDS

Military

MS 17186	Washer, Drive (Synchro)
MS 17187	Nut, Plain, Hexagon
MS 35276	Screw, Machine, Drilled, Fillister Head, Slotted, Corrosion Resisting Steel, Passivated, UNF-2A
MS 35338	Washer, Lock-Spring, Helical, Regular (Medium) Series

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 5990

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Certification.- The contractor shall certify that the synchros furnished under this specification have passed the qualification tests in accordance with MIL-S-20708 and the exceptions specified herein.

3.2 Design and construction.- Synchros furnished under this specification shall conform with the design, construction and physical dimensions specified in Figure 1.

3.2.1 Housings.- Not applicable.

3.2.2 Slip rings.- Not applicable.

3.3 General requirements.- All requirements shall be in accordance with MIL-S-20708 except as otherwise specified herein. In case of conflict between the requirements of MIL-S-20708 and this specification, the requirements of this specification shall govern.

3.3.1 Impedance.- Not applicable.

3.3.2 Altitude.- Not applicable.

3.3.3 Vibration.- Synchros shall withstand mechanical vibrations of 0.10 ± 0.02 inch amplitude up to 60 cycles per second perpendicular and parallel to the shaft axis for a period of 8 hours ± 15 minutes without mechanical damage or loosening of parts, and with no greater degradation in performance than specified in MIL-S-20708 following conformance to the vibration requirement.

3.3.4 Shock.- Synchros shall be capable of withstanding shock blows of 100 G. After testing, there shall be no damage or loosening of parts and synchros shall meet performance requirements specified in MIL-S-20708 following shock testing.

3.3.5 Ambient temperature.- Synchros shall be capable of storage in ambients ranging from -62°C to 100°C. Synchros shall be capable of operation in ambient temperatures ranging from -55°C to 85°C. Synchros shall meet the applicable requirements in Table I at the specified ambient temperatures of MIL-S-20708, except the high ambient temperature shall be 85°C in lieu of 125°C.

3.3.6 Endurance.- All synchros shall be capable of continuous operation for 1000 ± 10 hours without failure or undue wear. After testing, all synchros shall meet the applicable requirements of MIL-S-20708. The high ambient temperature shall be 85°C in lieu of 125°C.

3.4 Performance requirements.- The performance requirements shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.

TABLE I. SYNCHRO, 400 Hz, SIZE 16

Requirements	Units	Type TRB4b
Primary voltage (nominal)	Volts	115
Primary current (± 10%)	Milliamps	179
Primary power (± 20%)	Watts	2.1
Transformation ratio (± 1%)	---	0.783
Electrical error (max)	Minutes	12
Torque gradient (± .001)	Oz-in/deg	0.014
Receiver error (max)	Minutes	60
Null voltage total (max)	Millivolts	---
Fund. component of null voltage (max)	Millivolts	---
Friction torque, 22°C	Oz-in	---
(max) @ -55° ± 5°C	Oz-in	---
Temperature rise (max)	°C	---
Synchronizing time (max):		
30° ± 2° displacement	Seconds	1
177° ± 2° displacement	Seconds	2

3.5 Part number identification.- Synchros shall be identified by the following part number (see 6.2).

Part No.	Type	Item Name
8603981	16TRB4b	Synchro, Receiver

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Certification of conformance to qualification tests.- Certification of conformance to qualification tests as specified in 3.1 is authorized for this item in accordance with 4.2.1.

4.2.1 Suppliers responsibilities.- The supplier shall be responsible for performance of all qualification tests and inspections necessary to insure that the synchros have met the qualification tests of MIL-S-20708, with exceptions as specified herein, under the following conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.

a. Qualification tests and inspections shall be performed and quantitative test results submitted for a minimum of four (4) synchros produced to the contract or within one (1) year prior to the contract. The synchros tested and inspected shall conform with the design, construction, and physical dimensions specified in Figure 1.

b. The certification shall reference the contract or purchase order number and shall include part number identification, nomenclature, quantity tested, and company name. The certification shall also provide a statement as follows:

"As the authorized representative of the supplier, the undersigned warrants and represents that: All of the information supplied herewith is true and accurate and meets requirements for certification of conformance to qualification tests of MIL-S-20708/95(MU)."

4.3 Quality conformance inspection.- Quality conformance examinations and tests shall be performed on the synchros in accordance with quality conformance tests of MIL-S-20708 as applicable and as specified herein.

4.4 Test methods and procedures.

4.4.1 Impedance.- Not applicable.

4.4.2 Altitude.- Not applicable.

4.4.3 Vibration.- Synchros shall be mounted rigidly to a vibration stand, shaft axis vertical and shaft extension downward, and shall be vibrated simultaneously in the vertical and horizontal directions for 8 hours $\pm$ 15 minutes, at 0.10 $\pm$ 0.02 inch amplitude and at a frequency varying linearly from 10 cps to 60 cps over a period of one minute. An acceptable test method is as follows: Mount the synchro with the shaft extension downward and shaft axis at 45° to the horizontal and vibrate in the vertical direction with a resultant amplitude yielding 0.10 $\pm$ 0.02 inch components parallel and perpendicular to the shaft axis.

4.4.4 Shock.- The shock test of MIL-S-20708 shall apply except that the shock blow and its application shall be in accordance with Method 202 of MIL-STD-202.

4.4.5 Ambient temperature.- The ambient temperature tests of MIL-S-20708 shall apply except that all synchros covered by this specification shall be subjected to a high temperature test of $85^{\circ}C$ in lieu of $125^{\circ}C$.

4.4.6 Endurance.- The endurance test of MIL-S-20708 shall apply except that the total time of test shall be 1000 $\pm$ 10 hours and the time of test at 23 $\pm$ $5^{\circ}C$ shall be 840 $\pm$ 4 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-S-20708.

6. NOTES

6.1 Intended use.- Synchros covered by this specification (see 1.1) are intended only for maintenance support of in-service materiel. For synchros applicable to new materiel design see MIL-STD-710.

6.2 Ordering data.- MIL-S-20708 ordering data coverage shall apply except the synchro part number identification shall be in accordance with 3.5.

6.3 Internal synchro design.- Figure 1 and Section 3 constitute the necessary Government requirements for supplying synchros covered by this specification. Details of internal design are optional. US Army Munitions Command detail drawings formerly used in procurement of these synchros are no longer required.

6.4 Information.- Information regarding synchros covered by this specification may be obtained from Commanding Officer, Frankford Arsenal, ATTN: SMUFA-T1000, Philadelphia, Pa. 19137.

Custodian:
Army - MU

Review activities:
Army - MU

User activities:
Army - None

Preparing activity:
Army - MU

Project No. 5990-A024

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.

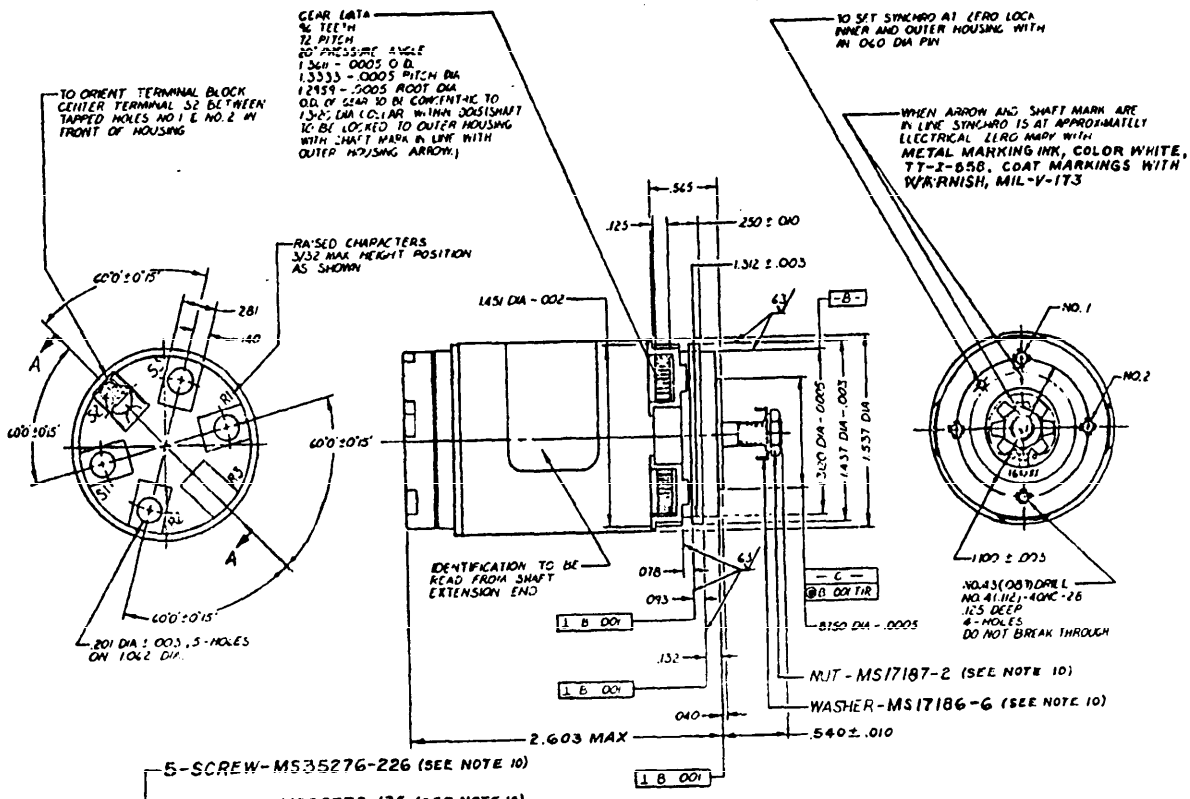


FIGURE 1 SYNCHROS, 400 CYCLE, SIZE 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
Department of the Army

OFFICIAL BUSINESS

Commanding Officer
Frankford Arsenal
ATTN: SMUFA-T1000
Philadelphia, Pa. 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:22Z
Check the source to verify that this is the current version before use.