[INCH-POUND]
A–A–59789/18
8 August 2008


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 5 PIECE, FOR COLD PLATE APPLICATIONS, .250 X .290 INCH (6.35 x 7.37 mm) BODY SIZE, WITH CAPTIVE REAR WEDGE AND VISUAL LOCK INDICATION, SCREW ACTUATED

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59789.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

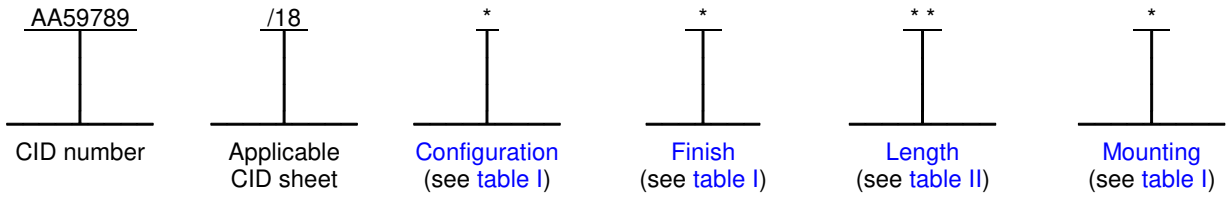

Example: AA59789/18DE40T is the PIN for an electroless nickel finished, 3.8 inch (96.5 mm) long card holder. The card holder also features three tapped mounting holes for use with 0–80 UNF 2B fasteners and a screw self–locking element for added resistance to loosening.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card firmly in place providing high resistance to shock and vibration while providing maximum thermal transfer.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A–A–59789.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59789.

Actuating screw hex drive socket. The dimension for hex drive socket shall be .094 inch (2.38 mm) across flats for mounting options “M”, “R”, “S”, “T”, and “U”.

Cold plate slot width. The recommended cold plate slot width to accommodate the circuit card assembly with attached card holder is .325 inch (8.25 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59789).


Installation torque. The recommended nominal installation torque is follows: 6 inch-pounds (0.7 N-m) for card holders of configuration “C” or “E” and 7 to 8 inch-pounds (0.8 to 0.9 N-m) for assemblies of configurations “L” or “D”.

Configuration. The configuration of a card holder shall be as specified in table I. The details of a particular configuration consist of those on figures 1 and 2, and may include those on figures 3 and 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE I. Configurations.

Configuration	Applicable figures	Hardware options
C	1 and 2	No added options
L	1, 2 and 3	Screw self-locking element
E	1, 2 and 4	Additional mounting hole
D	1, 2, 3 and 4	Screw self-locking element and additional mounting hole

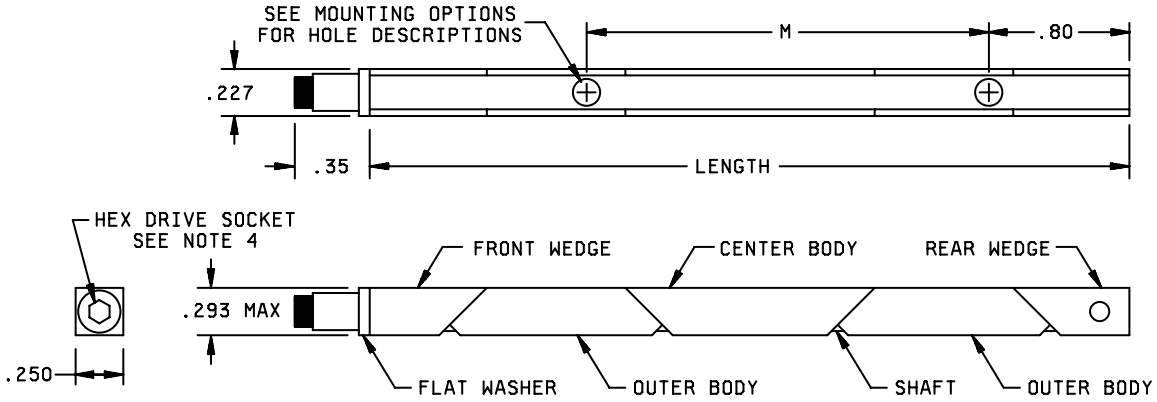

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.227	5.77	.250	6.35	.350	8.89	.80	20.32
.23	5.84	.293	7.44	.35	8.9		

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for information only.
2. Unless otherwise specified, tolerances are for ±.02 inch (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
3. Tolerance for the hole spacing is ±.005 inch (0.13 mm).
4. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm).

FIGURE 1. Relaxed and expanded dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Visual lock indicator (see figure 2). Card holders shall have a visual indicator to show when the card holder is in its relaxed (unlocked) state. When the card holder is in the unlocked (relaxed) state, the end of the actuating screw shall display a red band on the side of the screw. When the actuating screw on the card holder has been tightened (assembly expanded) so that the assembly is in the locked position, this red band shall be concealed.

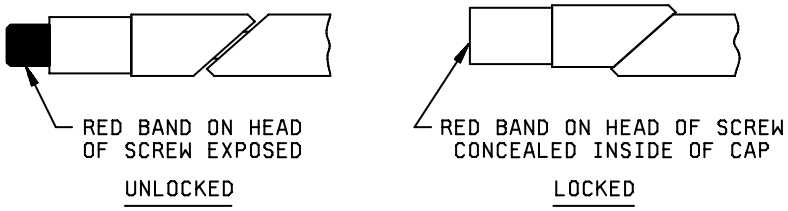


FIGURE 2. Visual lock indicator.

Finish. The wedge body finish designator shall be as specified in A–A–59789. The finishes available for this CID specification sheet are as follows: “B” (black anodize), “E” (electroless nickel), or “H” (hard black anodize).

Length, expanded, and relaxed dimensions. The length designator shall be as specified in A–A–59789 and the lengths available for this CID specification sheet are listed in table II. The length, expanded, and relaxed dimensions shall be as specified on figure 1.

TABLE II. Additional assembly dimensions (see figure 1). 1/

PIN length designator	Dimension “length” ±.02 (0.5 mm)	Dimension “M” ±.01 (0.3 mm)	Dimension “M/2” ±.02 (0.5 mm)
30	2.80 (71.1)	.90 (22.9)	.45 (11.4)
40	3.80 (96.5)	1.90 (48.3)	.95 (24.1)
50	4.80 (121.9)	2.90 (73.7)	1.45 (36.8)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Mounting. The mounting designators shall be as specified in A–A–59789. The mounting options available for this CID specification sheet are as follows: M (tapped metric M2.5 x 0.45 holes), “R” (rivet mount holes with counterbore and countersink), “S” (tapped 2-56 holes), “T” (tapped 0-80 holes), or “U” (tapped metric M2 x 0.4 holes). See figure 1 for mounting hole spacing requirements.

Rivet mounting holes. The holes used for rivet mounting shall be .068/.073 inch (1.73/1.85 mm) diameter, countersunk 100 degrees by .060 inch (1.52 mm) deep.

Rivets. This card holder uses rivet type A as specified in A–A–59789 when rivet mounting is used.

Configuration hardware options. Card holders can have the following hardware options: screw self-locking element, an additional mounting hole, or a combination of both. See table I for the correct PIN configuration identifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Screw self-locking element (see figure 3). The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock vibration. Card holders requiring a screw self-locking element shall include configuration identifier “L” in the PIN (see table I).

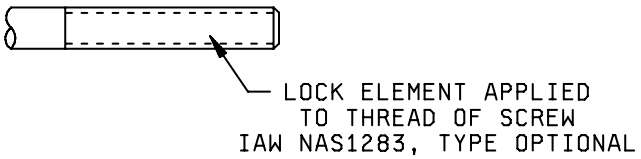


FIGURE 3. Screw self-locking element details.

Additional mounting hole (see figure 4). Card holders requiring an additional mounting hole shall include configuration identifier “E” in the PIN (see table I).

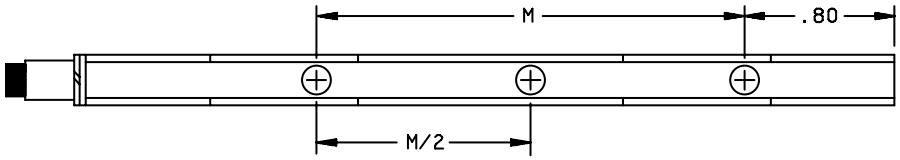


FIGURE 4. Additional mounting hole details.

Screw self-locking element and additional mounting hole. Card holders requiring a screw self-locking element and an additional mounting hole options shall include configuration identifier “D” in the PIN (see table I).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59789 – Holder, Electrical Card, Wedge Retainers, 5 Piece, For Cold Plate Applications, General Requirements For.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Other Publications

AEROSPACE INDUSTRIES ASSOCIATION (AIA)

AIA/NAS 1283 – Fasteners, Male Threaded, Self–locking.

(Application for copies should be addressed to the Aerospace Industries Association, 1250 Eye Street, NW, Suite 1200, Washington, DC 20005–3924 or at URL: http://www.aia-aerospace.org.)

Ordering data. Ordering data is as specified in A–A–59789.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
52094	Pentair Electronic Packaging – Calmark 149100 Danielson Street Poway, CA 92064–6898	Telephone: (858) 679–4550 Facsimile: (858) 679–4555 E-mail: sales@calmark.com URL: www.calmark.com

Part number supersession data. This CID specification sheet PINs supersedes the following manufacturer's part numbers as shown in table III. The CID PINs listed in table III are only for length designator "50". See table IV for CID PIN construction using other available lengths for this CID specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59789/18	Vendor similar designator or type part number 1/ CAGE 52094	PIN designator AA59789/18	Vendor similar designator or type part number 1/ CAGE 52094
CB50M	VA263–4.80TM2.5	EB50M	VA263–4.80ETM2.5
CB50R	VA263–4.80H	EB50R	VA263–4.80EH
CB50S	VA263–4.80T2	EB50S	VA263–4.80ET2
CB50T	VA263–4.80T0	EB50T	VA263–4.80ET0
CB50U	VA263–4.80TM2	EB50U	VA263–4.80ETM2
LB50M	VA263–4.80TM2.5L	DB50M	VA263–4.80ETM2.5L
LB50R	VA263–4.80HL	DB50R	VA263–4.80EHL
LB50S	VA263–4.80T2L	DB50S	VA263–4.80ET2L
LB50T	VA263–4.80T0L	DB50T	VA263–4.80ET0L
LB50U	VA263–4.80TM2L	DB50U	VA263–4.80ETM2L
CE50M	VEN263–4.80TM2.5	EE50M	VEN263–4.80ETM2.5
CE50R	VEN263–4.80H	EE50R	VEN263–4.80EH
CE50S	VEN263–4.80T2	EE50S	VEN263–4.80ET2
CE50T	VEN263–4.80T0	EE50T	VEN263–4.80ET0
CE50U	VEN263–4.80TM2	EE50U	VEN263–4.80ETM2
LE50M	VEN263–4.80TM2.5L	DE50M	VEN263–4.80ETM2.5L
LE50R	VEN263–4.80HL	DE50R	VEN263–4.80EHL
LE50S	VEN263–4.80T2L	DE50S	VEN263–4.80ET2L
LE50T	VEN263–4.80T0L	DE50T	VEN263–4.80ET0L
LE50U	VEN263–4.80TM2L	DE50U	VEN263–4.80ETM2L

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59789/18	Vendor similar designator or type part number 1/ CAGE 52094	PIN designator AA59789/18	Vendor similar designator or type part number 1/ CAGE 52094
CH50M	VHA263–4.80TM2.5	EH50M	VHA263–4.80ETM2.5
CH50R	VHA263–4.80H	EH50R	VHA263–4.80EH
CH50S	VHA263–4.80T2	EH50S	VHA263–4.80ET2
CH50T	VHA263–4.80T0	EH50T	VHA263–4.80ET0
CH50U	VHA263–4.80TM2	EH50U	VHA263–4.80ETM2
LH50M	VHA263–4.80TM2.5L	DH50M	VHA263–4.80ETM2.5L
LH50R	VHA263–4.80HL	DH50R	VHA263–4.80EHL
LH50S	VHA263–4.80T2L	DH50S	VHA263–4.80ET2L
LH50T	VHA263–4.80T0L	DH50T	VHA263–4.80ET0L
LH50U	VHA263–4.80TM2L	DH50U	VHA263–4.80ETM2L

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

TABLE IV. Example of PIN with available length designators.

PIN designator AA59789/18	Vendor similar designator or type part number 1/ 2/ CAGE 52094
DE30T	VEN263–2.80ET0L
DE40T	VEN263–3.80ET0L
DE50T	VEN263–4.80ET0L

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

2/ Other lengths are available on request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS

Preparing Activity:
DLA – CC

Project 5998–2007–038

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.