[INCH–POUND]
A–A–59789/19B
19 May 2015
SUPERSEDING
A–A–59789/19A
31 March 2010


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 5 PIECE, FOR COLD PLATE APPLICATIONS, .250 X .270 INCH (6.35 x 6.86 mm) BODY SIZE, SHAFT MOUNTING BODY, WITH CAPTIVE REAR WEDGE, SCREW ACTUATED

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59789.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see notes herein).

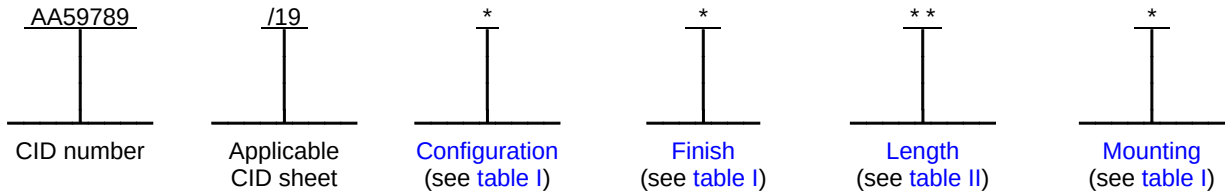


Example: AA59789/19DH30S is the PIN for a hard black anodized finished, 2.8 inch (71.1 mm) long card holder. The card holder also features three tapped mounting holes for use with 2–56 UNF 2B fasteners and a screw self-locking element for added resistance to loosening.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card firmly in place providing high resistance to shock and vibration while providing maximum thermal transfer.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A–A–59789.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59789.

Actuating screw hex drive socket. The dimension for hex drive socket shall be .094 inch (2.38 mm) across flats for mounting options "M", "R", "S", "T", and "U".

Cold plate slot width. The recommended cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59789).

Installation torque. The recommended nominal installation torque is follows: 6 inch-pounds (0.7 N-m) for card holders of configuration "C" or "E" and 7 to 8 inch-pounds (0.8 to 0.9 N-m) for assemblies of configurations "L" or "D".

Configuration. The configuration of a card holder shall be as specified in table I. The details of a particular configuration consist of those on figure 1, and may include those on figures 2 and 3.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Finish. The finish designator shall be as specified in A–A–59789. The finishes available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "E" (electroless nickel), "H" (hard black anodize) or "R" (clear chemical film).

TABLE I. Configurations.

| Configuration | Applicable figures | Hardware options |
|---|---|---|
| C | 1 | No added options |
| L | 1 and 2 | Screw self-locking element |
| E | 1 and 3 | Additional mounting hole |
| D | 1, 2, and 3 | Screw self-locking element and additional mounting hole |

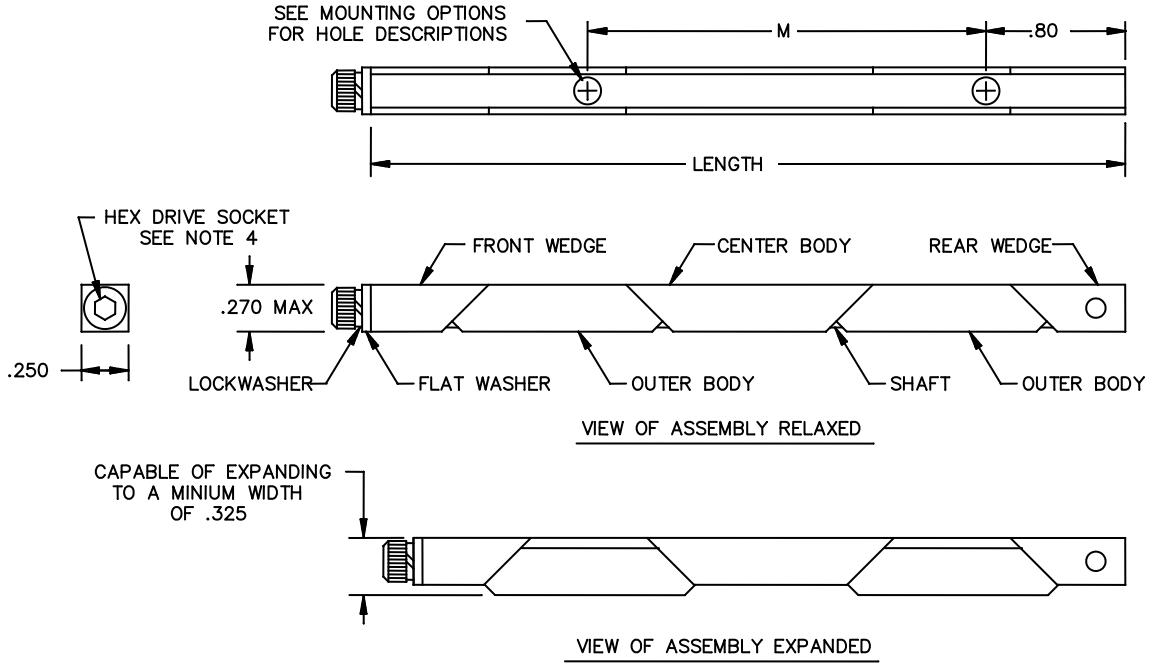


| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .250 | 6.35 | .270 | 6.86 | .325 | 8.26 | .80 | 20.32 |

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Tolerance for the hole spacing is ±.005 inch (0.13 mm).
4. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm).

FIGURE 1. Relaxed and expanded dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Length, expanded, and relaxed dimensions. The length designator shall be as specified in A–A–59789 and the lengths available for this CID specification sheet are listed in table II. The length, expanded, and relaxed dimensions shall be as specified on figure 1.

TABLE II. Additional assembly dimensions (see figure 1). 1/

| PIN length designator | Dimension "length" ±.02 (0.5) | Dimension "M" ±.005 (0.13) | Dimension "M/2" ±.005 (0.13) |
|---|---|---|---|
| 30 | 2.80 (71.1) | .90 (22.9) | .45 (11.4) |
| 40 | 3.80 (96.5) | 1.90 (48.3) | .95 (24.1) |
| 50 | 4.80 (121.9) | 2.90 (73.7) | 1.45 (36.8) |

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Mounting. The mounting designators shall be as specified in A–A–59789. The mounting options available for this CID specification sheet are as follows: "M" (tapped metric M2.5 x 0.45 holes), "R" (rivet mount holes with counterbore and countersink), "S" (tapped 2–56 holes), "T" (tapped 0–80 holes), or "U" (tapped metric M2 x 0.4 holes). See figure 1 for mounting hole spacing requirements.

Rivet mounting holes. The holes used for rivet mounting shall be .068/.073 inch (1.73/1.85 mm) diameter, countersunk 100 degrees by .060 inch (1.52 mm) deep.

Rivets. This card holder uses rivet type A as specified in A–A–59789 when rivet mounting is used.

Configuration hardware options. Card holders can have the following options. See table I for the correct PIN configuration identifier.

Screw self-locking element (see figure 2). The use of a screw self-locking element will provide prevailing torque for resistance to loosening of the card holder assembly from shock vibration. The screw self-locking element shall be as specified in A–A–59789. Card holders requiring a screw self-locking element shall include configuration identifier "L" in the PIN (see classification and notes).

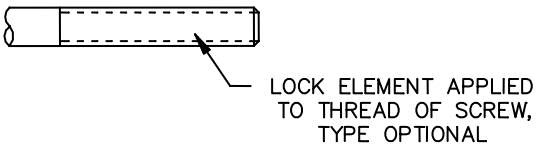



FIGURE 2. Screw self-locking element details.

Additional mounting hole (see figure 3). Card holders requiring an additional mounting hole shall include configuration identifier "E" in the PIN (see classification and notes).

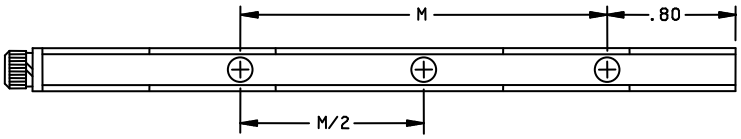



FIGURE 3. Additional mounting hole details.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Screw self-locking element and additional mounting hole. Card holders requiring a screw self-locking element and an additional mounting hole shall include configuration identifier "D" in the PIN (see classification and notes).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59789 – Holder, Electrical Card, Wedge Retainers, 5 Piece, For Cold Plate Applications, General Requirements For.

(Copies of these documents are available online at http://quicksearch.dla.mil.)

Ordering data. Ordering data shall be as specified in A–A–59789.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| Manufacturer CAGE | Manufacturer name and address | Manufacturer contact information |
|---|---|---|
| 5BG68 | American Circuit Card Retainers, Inc.<br>2310 E. Orangethorpe Avenue<br>Anaheim, CA 92806–1231 | Telephone: (714) 738–6194<br>Facsimile: (714) 446–0119<br>E-mail: sales@accrmfg.com<br>URL: www.accrmfg.com |
| 76096 | Elma Electronic, Inc.<br>44350 Grimmer Blvd.<br>Fremont, CA 94538–6385 | Telephone: (510) 656–3400<br>Facsimile: (510) 656–3783<br>Electronic mail: sales@elma.com<br>URL: www.elma.com |
| 61081 | Schroff – A Division of Pentair<br>Equipment and Electronic Protection<br>(formerly Calmark)<br>7328 Trade Street<br>San Diego, CA 92121–3410 | Telephone: (858) 740–2400<br>Toll Free: (800) 854–7086<br>Facsimile: (858) 740–2430<br>E-mail: schroff.us@pentair.com<br>URL: http://www.pentairprotect.com |
| 3E7U8 | Wakefield–Vette<br>2910 Industrial Drive<br>Raleigh, NC 27609–7529 | Telephone: (919) 469–2004<br>Facsimile: (919) 469–2827<br>E-mail: wedgelocks@wakefield.com<br>URL: www.wakefield-vette.com |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

Part number supersession data. This CID specification sheet PINs supersedes the following manufacturer's part numbers as shown in table III and on DESC Drawing 89024 (table IV) as shown. The CID PINs listed in table III are only for length designator "50". See table V for CID PIN construction using other available lengths for this CID specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

| PIN designator AA59590/19 | Vendor similar designator or type part number 1/ | | | |
|---|---|---|---|---|
| | CAGE 61081 | CAGE 5BG68 | CAGE 3E7UB | CAGE 76096 |
| CB50M | A260–4.80TM2.5 | 5260BA–4.80TM2.5 | 426C–480MSB | 325-04.80TNBA2TM2.5NN |
| CB50R | A260–4.80H | 5260BA–4.80H | 426C–480RSB | 325-04.80TNBA2H00.0NN |
| CB50S | A260–4.80T2 | 5260BA–4.80T2 | 426C–480SSB | 325-04.80TNBA2T20.0NN |
| CB50T | A260–4.80T0 | 5260BA–4.80T0 | 426C–480TSB | 325-04.80TNBA2T00.0NN |
| CB50U | A260–4.80TM2 | 5260BA–4.80TM2 | 426C–480USB | 325-04.80TNBA2TM2.0NN |
| LB50M | A260–4.80TM2.5L | 5260BA–4.80TM2.5L | 426C–480MSB–P | 325-04.80TNBA2TM2.5LN |
| LB50R | A260–4.80HL | 5260BA–4.80HL | 426C–480RSB–P | 325-04.80TNBA2H00.0LN |
| LB50S | A260–4.80T2L | 5260BA–4.80T2L | 426C–480SSB–P | 325-04.80TNBA2T20.0LN |
| LB50T | A260–4.80T0L | 5260BA–4.80T0L | 426C–480TSB–P | 325-04.80TNBA2T00.0LN |
| LB50U | A260–4.80TM2L | 5260BA–4.80TM2L | 426C–480USB–P | 325-04.80TNBA2TM2.0LN |
| EB50M | A260–4.80ETM2.5 | 5260BA–4.80ETM2.5 | 426C–480MSB–C | 325-04.80TNBA3TM2.5NN |
| EB50R | A260–4.80EH | 5260BA–4.80EH | 426C–480RSB–C | 325-04.80TNBA3H00.0NN |
| EB50S | A260–4.80ET2 | 5260BA-4.80ET2 | 426C–480SSB–C | 325-04.80TNBA3T20.0NN |
| EB50T | A260–4.80ET0 | 5260BA–4.80ET0 | 426C–480TSB–C | 325-04.80TNBA3T00.0NN |
| EB50U | A260–4.80ETM2 | 5260BA–4.80ETM2 | 426C–480USB–C | 325-04.80TNBA3TM2.0LN |
| DB50M | A260–4.80ETM2.5L | 5260BA–4.80ETM2.5L | 426C–480MSB–CP | 325-04.80TNBA3TM2.5LN |
| DB50R | A260–4.80EHL | 5260BA–4.80EHL | 426C–480RSB–CP | 325-04.80TNBA3H00.0NN |
| DB50S | A260–4.80ET2L | 5260BA–4.80ET2L | 426C–480SSB–CP | 325-04.80TNBA3T20.0NN |
| DB50T | A260–4.80ET0L | 5260BA–4.80ET0L | 426C–480TSB–CP | 325-04.80TNBA3T00.0NN |
| DB50U | A260–4.80ETM2L | 5260BA–4.80ETM2L | 426C–480USB–CP | 325-04.80TNBA3TM2.0LN |
| CC50M | 260–4.80TM2.5 | 5260CG–4.80TM2.5 | 426C–480MSG | 325-04.80TNCG2TM2.5NN |
| CC50R | 260–4.80H | 5260CG–4.80H | 426C–480RSG | 325-04.80TNCG2H00.0NN |
| CC50S | 260–4.80T2 | 5260CG–4.80T2 | 426C–480SSG | 325-04.80TNCG2T20.0NN |
| CC50T | 260–4.80T0 | 5260CG–4.80T0 | 426C–480TSG | 325-04.80TNCG2T00.0NN |
| CC50U | 260–4.80TM2 | 5260CG–4.80TM2 | 426C–480USG | 325-04.80TNCG2TM2.0NN |
| LC50M | 260–4.80TM2.5L | 5260CG–4.80TM2.5L | 426C–480MSG–P | 325-04.80TNCG2TM2.5LN |
| LC50R | 260–4.80HL | 5260CG–4.80HL | 426C–480RSG–P | 325-04.80TNCG2H00.0LN |
| LC50S | 260–4.80T2L | 5260CG–4.80T2L | 426C–480SSG–P | 325-04.80TNCG2T20.0LN |
| LC50T | 260–4.80T0L | 5260CG–4.80T0L | 426C–480TSG–P | 325-04.80TNCG2T00.0LN |
| LC50U | 260–4.80TM2L | 5260CG–4.80TM2L | 426C–480USG–P | 325-04.80TNCG2TM2.0LN |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

| PIN designator AA59590/19 | Vendor similar designator or type part number 1/ | | | |
|---|---|---|---|---|
| | CAGE 61081 | CAGE 5BG68 | CAGE 3E7UB | CAGE 76096 |
| EC50M | 260–4.80ETM2.5 | 5260CG–4.80ETM2.5 | 426C–480MSG–C | 325-04.80TNCG3TM2.5NN |
| EC50R | 260–4.80EH | 5260CG–4.80EH | 426C–480RSG–C | 325-04.80TNCG3H00.0NN |
| EC50S | 260–4.80ET2 | 5260CG–4.80ET2 | 426C–480SSG–C | 325-04.80TNCG3T20.0NN |
| EC50T | 260–4.80ET0 | 5260CG–4.80ET0 | 426C–480TSG–C | 325-04.80TNCG3T00.0NN |
| EC50U | 260–4.80ETM2 | 5260CG–4.80ETM2 | 426C–480USG–C | 325-04.80TNCG3TM2.0LN |
| DC50M | 260–4.80ETM2.5L | 5260CG–4.80ETM2.5L | 426C–480MSG–CP | 325-04.80TNCG3TM2.5LN |
| DC50R | 260–4.80EHL | 5260CG–4.80EHL | 426C–480RSG–CP | 325-04.80TNCG3H00.0NN |
| DC50S | 260–4.80ET2L | 5260CG–4.80ET2L | 426C–480SSG–CP | 325-04.80TNCG3T20.0NN |
| DC50T | 260–4.80ET0L | 5260CG–4.80ET0L | 426C–480TSG–CP | 325-04.80TNCG3T00.0NN |
| DC50U | 260–4.80ETM2L | 5260CG–4.80ETM2L | 426C–480USG–CP | 325-04.80TNCG3TM2.0LN |
| CE50M | EN260–4.80TM2.5 | 5260EN–4.80TM2.5 | 426C–480MSE | 325-04.80TNEN2TM2.5NN |
| CE50R | EN260–4.80H | 5260EN–4.80H | 426C–480RSE | 325-04.80TNEN2H00.0NN |
| CE50S | EN260–4.80T2 | 5260EN–4.80T2 | 426C–480SSE | 325-04.80TNEN2T20.0NN |
| CE50T | EN260–4.80T0 | 5260EN–4.80T0 | 426C–480TSE | 325-04.80TNEN2T00.0NN |
| CE50U | EN260–4.80TM2 | 5260EN–4.80TM2 | 426C–480USE | 325-04.80TNEN2TM2.0NN |
| LE50M | EN260–4.80TM2.5L | 5260EN–4.80TM2.5L | 426C–480MSE–P | 325-04.80TNEN2TM2.5LN |
| LE50R | EN260–4.80HL | 5260EN–4.80HL | 426C–480RSE–P | 325-04.80TNEN2H00.0LN |
| LE50S | EN260–4.80T2L | 5260EN–4.80T2L | 426C–480SSE–P | 325-04.80TNEN2T20.0LN |
| LE50T | EN260–4.80T0L | 5260EN–4.80T0L | 426C–480TSE–P | 325-04.80TNEN2T00.0LN |
| LE50U | EN260–4.80TM2L | 5260EN–4.80TM2L | 426C–480USE–P | 325-04.80TNEN2TM2.0LN |
| EE50M | EN260–4.80ETM2.5 | 5260EN–4.80ETM2.5 | 426C–480MSE–C | 325-04.80TNEN3TM2.5NN |
| EE50R | EN260–4.80EH | 5260EN–4.80EH | 426C–480RSE–C | 325-04.80TNEN3H00.0NN |
| EE50S | EN260–4.80ET2 | 5260EN–4.80ET2 | 426C–480SSE–C | 325-04.80TNEN3T20.0NN |
| EE50T | EN260–4.80ET0 | 5260EN–4.80ET0 | 426C–480TSE–C | 325-04.80TNEN3T00.0NN |
| EE50U | EN260–4.80ETM2 | 5260EN–4.80ETM2 | 426C–480USE–C | 325-04.80TNEN3TM2.0LN |
| DE50M | EN260–4.80ETM2.5L | 5260EN–4.80ETM2.5L | 426C–480MSE–CP | 325-04.80TNEN3TM2.5LN |
| DE50R | EN260–4.80EHL | 5260EN–4.80EHL | 426C–480RSE–CP | 325-04.80TNEN3H00.0NN |
| DE50S | EN260–4.80ET2L | 5260EN–4.80ET2L | 426C–480SSE–CP | 325-04.80TNEN3T20.0NN |
| DE50T | EN260–4.80ET0L | 5260EN–4.80ET0L | 426C–480TSE–CP | 325-04.80TNEN3T00.0NN |
| DE50U | EN260–4.80ETM2L | 5260EN–4.80ETM2L | 426C–480USE–CP | 325-04.80TNEN3TM2.0LN |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

| PIN designator AA59590/19 | Vendor similar designator or type part number 1/ | | | |
|---|---|---|---|---|
| | CAGE 61081 | CAGE 5BG68 | CAGE 3E7UB | CAGE 76096 |
| CH50M | HA260–4.80TM2.5 | 5260BH–4.80TM2.5 | 426C–480MSH | 325-04.80TNHA2TM2.5NN |
| CH50R | HA260–4.80H | 5260BH–4.80H | 426C–480RSH | 325-04.80TNHA2H00.0NN |
| CH50S | HA260–4.80T2 | 5260BH–4.80T2 | 426C–480SSH | 325-04.80TNHA2T20.0NN |
| CH50T | HA260–4.80T0 | 5260BH–4.80T0 | 426C–480TSH | 325-04.80TNHA2T00.0NN |
| CH50U | HA260–4.80TM2 | 5260BH–4.80TM2 | 426C–480USH | 325-04.80TNHA2TM2.0NN |
| LH50M | HA260–4.80TM2.5L | 5260BH–4.80TM2.5L | 426C–480MSH–P | 325-04.80TNHA2TM2.5LN |
| LH50R | HA260–4.80HL | 5260BH–4.80HL | 426C–480RSH–P | 325-04.80TNHA2H00.0LN |
| LH50S | HA260–4.80T2L | 5260BH–4.80T2L | 426C–480SSH–P | 325-04.80TNHA2T20.0LN |
| LH50T | HA260–4.80T0L | 5260BH–4.80T0L | 426C–480TSH–P | 325-04.80TNHA2T00.0LN |
| LH50U | HA260–4.80TM2L | 5260BH–4.80TM2L | 426C–480USH–P | 325-04.80TNHA2TM2.0LN |
| EH50M | HA260–4.80ETM2.5 | 5260BH–4.80ETM2.5 | 426C–480MSH–C | 325-04.80TNHA3TM2.5NN |
| EH50R | HA260–4.80EH | 5260BH–4.80EH | 426C–480RSH–C | 325-04.80TNHA3H00.0NN |
| EH50S | HA260–4.80ET2 | 5260BH–4.80ET2 | 426C–480SSH–C | 325-04.80TNHA3T20.0NN |
| EH50T | HA260–4.80ET0 | 5260BH–4.80ET0 | 426C–480TSH–C | 325-04.80TNHA3T00.0NN |
| EH50U | HA260–4.80ETM2 | 5260BH–4.80ETM2 | 426C–480USH–C | 325-04.80TNHA3TM2.0LN |
| DH50M | HA260–4.80ETM2.5L | 5260BH–4.80ETM2.5L | 426C–480MSH–CP | 325-04.80TNHA3TM2.5LN |
| DH50R | HA260–4.80EHL | 5260BH–4.80EHL | 426C–480RSH–CP | 325-04.80TNHA3H00.0NN |
| DH50S | HA260–4.80ET2L | 5260BH–4.80ET2L | 426C–480SSH–CP | 325-04.80TNHA3T20.0NN |
| DH50T | HA260–4.80ET0L | 5260BH–4.80ET0L | 426C–480TSH–CP | 325-04.80TNHA3T00.0NN |
| DH50U | HA260–4.80ETM2L | 5260BH–4.80ETM2L | 426C–480USH–CP | 325-04.80TNHA3TM2.0LN |
| CR50M | R260–4.80TM2.5 | 5260CC–4.80TM2.5 | 426C–480MST | 325-04.80TNCR2TM2.5NN |
| CR50R | R260–4.80H | 5260CC–4.80H | 426C–480RST | 325-04.80TNCR2H00.0NN |
| CR50S | R260–4.80T2 | 5260CC–4.80T2 | 426C–480SST | 325-04.80TNCR2T20.0NN |
| CR50T | R260–4.80T0 | 5260CC–4.80T0 | 426C–480TST | 325-04.80TNCR2T00.0NN |
| CR50U | R260–4.80TM2 | 5260CC–4.80TM2 | 426C–480UST | 325-04.80TNCR2TM2.0NN |
| LR50M | R260–4.80TM2.5L | 5260CC–4.80TM2.5L | 426C–480MST–P | 325-04.80TNCR2TM2.5LN |
| LR50R | R260–4.80HL | 5260CC–4.80HL | 426C–480RST–P | 325-04.80TNCR2H00.0LN |
| LR50S | R260–4.80T2L | 5260CC–4.80T2L | 426C–480SST–P | 325-04.80TNCR2T20.0LN |
| LR50T | R260–4.80T0L | 5260CC–4.80TOL | 426C–480TST–P | 325-04.80TNCR2T00.0LN |
| LR50U | R260–4.80TM2L | 5260CC–4.80TM2L | 426C–480UST–P | 325-04.80TNCR2TM2.0LN |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

| PIN designator AA59590/19 | Vendor similar designator or type part number 1/ | | | |
|---|---|---|---|---|
| | CAGE 61081 | CAGE 5BG68 | CAGE 3E7UB | CAGE 76096 |
| ER50M | R260–4.80ETM2.5 | 5260CC–4.80ETM2.5 | 426C–480MST–C | 325-04.80TNCR3TM2.5NN |
| ER50R | R260–4.80EH | 5260CC–4.80EH | 426C–480RST–C | 325-04.80TNCR3H00.0NN |
| ER50S | R260–4.80ET2 | 5260CC–4.80ET2 | 426C–480SST–C | 325-04.80TNCR3T20.0NN |
| ER50T | R260–4.80ET0 | 5260CC–4.80ET0 | 426C–480TST–C | 325-04.80TNCR3T00.0NN |
| ER50U | R260–4.80ETM2 | 5260CC–4.80ETM2 | 426C–480UST–C | 325-04.80TNCR3TM2.0LN |
| DR50M | R260–4.80ETM2.5L | 5260CC–4.80ETM2.5L | 426C–480MST–CP | 325-04.80TNCR3TM2.5LN |
| DR50R | R260–4.80EHL | 5260CC–4.80EHL | 426C–480RST–CP | 325-04.80TNCR3H00.0NN |
| DR50S | R260–4.80ET2L | 5260CC–4.80ET2L | 426C–480SST–CP | 325-04.80TNCR3T20.0NN |
| DR50T | R260–4.80ET0L | 5260CC–4.80ETOL | 426C–480TST–CP | 325-04.80TNCR3T00.0NN |
| DR50U | R260–4.80ETM2L | 5260CC–4.80ETM2L | 426C–480UST–CP | 325-04.80TNCR3TM2.0LN |

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.

TABLE IV. DESC Drawing PIN supersession information.

| Superseded (old) PIN in accordance with DESC Drawing 89024 | Superseding (new) CID PIN | Superseded (old) PIN in accordance with DESC Drawing 89024 | Superseding (new) CID PIN |
|---|---|---|---|
| 89024–01BH | AA59789/19CB30R | 89024–01CH | AA59789/19CC30R |
| 89024–04BH | AA59789/19CB40R | 89024–04CH | AA59789/19CC40R |
| 89024–07BH | AA59789/19CB50R | 89024–07CH | AA59789/19CC50R |
| 89024–01BS | AA59789/19CB30T | 89024–01CS | AA59789/19CC30T |
| 89024–04BS | AA59789/19CB40T | 89024–04CS | AA59789/19CC40T |
| 89024–07BS | AA59789/19CB50T | 89024–07CS | AA59789/19CC50T |
| 89024–01BT | AA59789/19CB30S | 89024–01CT | AA59789/19CC30S |
| 89024–04BT | AA59789/19CB40S | 89024–04CT | AA59789/19CC40S |
| 89024–07BT | AA59789/19CB50S | 89024–07CT | AA59789/19CC50S |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.

PIN length examples. The CID PINs listed in table V are for all available standard card holder lengths for this specification sheet. However, only one specific finish, mounting and configuration are listed (see PIN example for a break-down of the codes).

TABLE V. Example of PIN with available length designators.

| PIN designator AA59789/19 | Vendor similar designator or type part number 1/ 2/ | | | |
|---|---|---|---|---|
| | CAGE 61081 | CAGE 5BG68 | CAGE 3E7UB | CAGE 76096 |
| DH30S | HA260–2.80ET2L | 5260BH–2.80ET2L | 426C–280SSH–CP | 325-02.80TNHA3T20.0LN |
| DH40S | HA260–3.80ET2L | 5260BH–3.80ET2L | 426C–380SSH–CP | 325-03.80TNHA3T20.0LN |
| DH50S | HA260–4.80ET2L | 5260BH–4.80ET2L | 426C–480SSH–CP | 325-04.80TNHA3T20.0LN |

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59789.
2/ Other lengths are available on request.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing activity:
DLA – CC

Project 5998–2015–007

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:27Z
Check the source to verify that this is the current version before use.