INCH-POUND

A-A-59805
6 February 2008

COMMERCIAL ITEM DESCRIPTION

HOOD, FIRE FIGHTER'S

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This Commercial Item Description covers the requirements for a structural fire fighter's hood to be used by Navy Damage Control fire fighters.

2. SALIENT CHARACTERISTICS.

2.1 Description. The fire fighter's hood shall be a one-piece garment with an elasticized face opening. In addition, the hood shall consist of a two-layer knit body and apron (see figure 1).

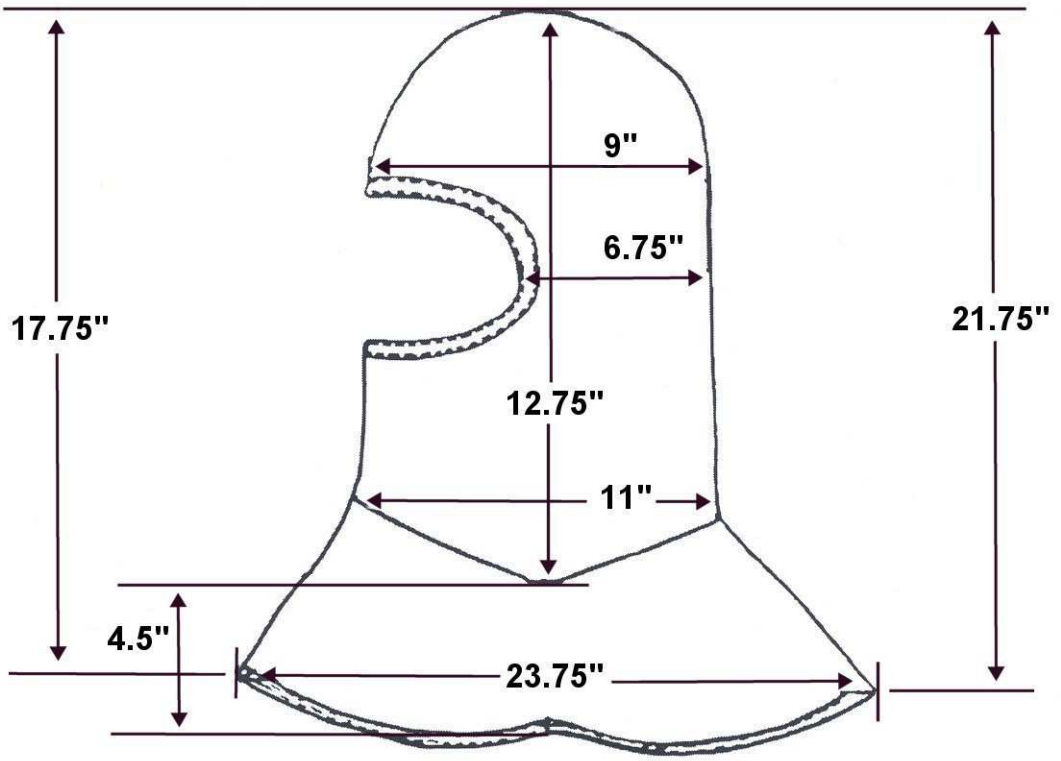


FIGURE 1. Hood, fire fighter's.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Commander, Naval Sea Systems Command, ATTN: SEA 05M2, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard DC 20376-5160 or emailed to CommandStandards@navy.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.assist.daps.dla.mil.

FSC 4210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

2.2 Patterns. Patterns shall be contractor furnished and shall be approved by the U.S. Navy.

2.3 Measurements. All measurements shall be ±½ inch. The measurements shall be taken with the hood laying flat as shown in figure 1 and with minimal tension so the hood is smooth. The reference datum for all measurements shall be a line which is perpendicular to the fold created when the hood body is folded in half horizontally, and shall intersect the fold at the top of the hood. Except as specified in 2.3d, horizontal measurements shall be taken parallel to the reference datum and vertical measurements shall be taken perpendicular to the reference datum.

a. Width at top of face opening – With the hood laying flat as shown in figure 1, measurement shall be taken between the outermost edge of the face opening binding and the center back seam.

b. Width at center of face opening – With the hood laying flat as shown in figure 1, fold the face opening in half vertically to determine the face opening vertical center point. Measurement shall be taken between the face opening vertical center point and the center back seam.

c. Width at bottom of the hood body – With the hood laying flat as shown in figure 1, measurement shall be taken between the outermost edges of the body and apron joining seam.

d. Width at bottom of apron – With the hood laying flat as shown in figure 1, measurement shall be taken without regard to reference datum between the outermost edges of the apron.

e. Front height – With the hood laying flat as shown in figure 1, measurement shall be taken from the top of the hood to the outermost edge of the apron binding at the front of the hood.

f. Rear height – With the hood laying flat as shown in figure 1, measurement shall be taken from the top of the hood to the outermost edge of the apron binding at the rear of the hood.

g. Hood body center height measurement – With the hood laying flat as shown in figure 1, determine the center point of the body and apron joining seam. Measurement shall be taken between the center point of the body and apron joining seam and the top of the hood.

h. Apron center height measurement – With the hood laying flat as shown in figure 1, determine the center point of the body and apron joining seam and measure down to the bottom of the apron binding.

2.4 Fabric. The outer fabric shall be a 60 percent Kevlar®/40 percent polybenzimidazole (PBI) knit, 7.3 oz/yd^2 minimum and the inner layer is 80 percent flame resistant rayon/20 percent PBI knit, 6.4 oz/yd^2 minimum. The binding materials shall be the 60 percent Kevlar®/40 percent PBI knit.

2.5 Construction. The stitch and seam construction shall be stitch type 504 and seam type SSH-2 as per ASTM D6193.

2.6 Thermal protective performance. The hood shall meet the measurement of figure 1 and have a minimum continuous thermal protective performance (TPP) of 20 TPP as tested in accordance with NFPA 1971 on the complete hood except for the face opening and entry neck position.

2.7 Labels. The hood shall be labeled in accordance with NFPA 1971.

2.8 Workmanship. Hoods shall be free from irregularities or defects, which adversely affect performance, reliability, or durability.

3. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. PRODUCT CONFORMANCE PROVISIONS.

4.1 Product conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

4.2 NFPA 1971 certification. The hood shall be third party certified to NFPA 1971. Compliance of the hood to the NFPA 1971 standard is required by the standard to be certified by an approved certification organization. The salient characteristics of this description that are in addition to the requirements of the NFPA 1971 standard shall be included in the certification process.

5. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES.

6.1 Source of documents.

6.1.1 ASTM. ASTM standards are available from ASTM International, 100 Barr Harbor Dr., PO Box C700, West Conshohocken, PA 19428-2959 or online at www.astm.org.

6.1.2 FAR. The Federal Acquisition Regulation may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402 or online at http://www.arnet.gov/far.

6.1.3 NFPA. NFPA test methods are available from www.nfpa.org or from the National Fire Protection Association (NFPA), 1 Batterymarch Park, Quincy, MA 02269-9101.

6.2 Ordering data. The contract or order should specify the following:

a. CID document number.
b. Product conformance provisions.
c. Quantity required.
d. Packaging requirements.

6.3 Key words.

Fire fighting
Hood

MILITARY INTERESTS

Custodians:
Navy – SH
Air Force – 03

Review Activities:
Navy – AS, YD
AF – 84, 99
DLA – IS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FSS

Preparing Activity:
Navy – SH
(Project 4210-0659-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.