METRIC

A-A-59810 A
18 April 2018
SUPERSEDING
A-A-59810
13 March 2008

COMMERCIAL ITEM DESCRIPTION
BATTERY, NON-RECHARGEABLE, 9 VDC (LITHIUM)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.6

1. SCOPE. This commercial item description (CID) covers the government acquisition requirements for a 9 VDC non-rechargeable lithium manganese dioxide battery with metal cell encasings, used to provide memory hold power for stationary communications systems and portable electronic, communication, and other military equipment. It is also used to power portable mulitmeters. The metal cell encasing serves to enhance performance in extreme environments.

2. SALIENT CHARACTERISTICS. The battery shall meet the requirements of ANSI C18.3M Part 1, American National Standard for Portable Lithium Primary Cells and Batteries – General and Specifications for NEMA C18.3, and the requirements stated herein.

2.1 Dimensions. The battery shall meet the dimensional requirements shown in figure 1.

2.2 Voltage. The battery shall provide a nominal voltage of 9 VDC, and operate over a range from 5.4 to 9.9 volts.

2.3 Weight. The battery weight shall be not greater than 37 grams.

2.4 Terminal type. The terminals for this battery shall be nickel plated miniature snap type.

2.5 Cell encasing. Cell encasing shall be metallic.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data that may improve this document should be sent to: USA RDECOM CERDEC Product Realization Systems Engineering & Quality Directorate, ATTN: RDER-PRO or emailed to usarmy.apg.rdecom-cerdec.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/

AMSC N/A FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

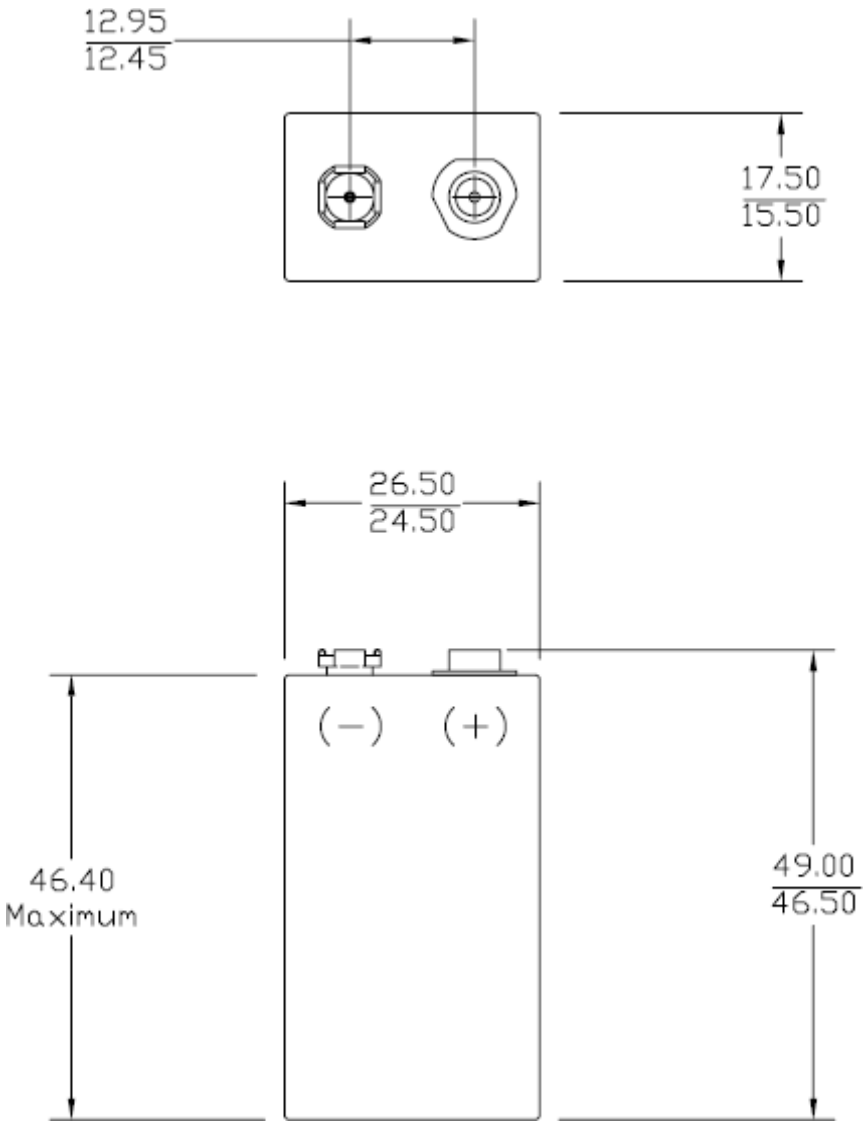


FIGURE 1: Battery dimensions.

3. REGULATORY REQUIREMENTS

3.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

3.2 Environmental protection. All battery products and production methods shall meet all applicable Environmental Protection Agency restrictions in effect on the date of the contract. These regulations specify material emissions that are hazardous to the environment or to the user's health and shall be applied during the manufacturing, service, transportation, storage, and use of the battery supplied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

4. PRODUCT CONFORMANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

4.2 Market acceptability. The item type offered must have been previously sold to the government or on the commercial market.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order (see 6.2(b)).

6. NOTES

6.1 Sources of documents

6.1.1 ANSI standards. Electronic copies of ANSI standards may be obtained from https://www.ansi.org/

6.1.2 FAR. The FAR may be downloaded from https://www.acquisition.gov/browsefar

6.2 Ordering data. The solicitation or contract order should specify the following:

(a) CID document number and revision.
(b) Preservation, packing, and marking (see 5.1).

6.3 Key words.

Lithium
Manganese dioxide

6.4 Intended use. This battery is a 9-volt lithium battery intended for use in environmental extremes (hot or cold, dry or damp) for any using end item that would normally work from a 9-volt alkaline battery, NSN 6135-00-900-2139. In most uses, it will provide approximately double the energy. It will also tolerate environmental extremes better than the 9-volt lithium battery with plastic cell encasings, NSN 6135-01-369-9792. Due to the metal cell encasings, this battery is slightly larger than the other two and may have problems fitting into some battery holders, particularly those that accommodate the more-rounded corners of the alkaline battery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:

Army – CR

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA – FSS

Preparing Activity:

Army – CR

(Project 6135-2018-001)

NOTE: The activities listed above were interested in the document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.