INCH-POUND

MIL-G-44419
9 October 1990

MILITARY SPECIFICATION

GLOVES, MEN'S AND WOMEN'S, INTERMEDIATE COLD/WET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of glove constructed with a leather shell, waterproof insert and an insulated lining.

1.2 Classification. The gloves shall be of the following sizes as specified (see 6.2).

Schedule of Sizes

1	(XS)
2	(S)
3	(M)
4	(L)
5	(XL)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
A-A-50199	-	Thread, Polyester Core, Cotton- or Polyester-Covered
V-T-295	-	Thread, Nylon
KK-L-254	-	Leather, Sheepskin, Chrome Tanned
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-T-3530	-	Thread and Twine: Mildew Resistant or Water Repellent Treated
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-L-40051	-	Leather, Cattlehide, for Glove Leather
MIL-T-43566	-	Tape, Textile, Cotton or Polyester, General Purpose, Natural or in Colors
MIL-B-44346	-	Batting, Synthetic Fiber, Medium Density

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-311	-	Leather, Methods of Sampling and Testing
FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of the documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Applications for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Leather.

3.3.1.1 Sheepskin. The leather used for sizes 1 and 2 shall be drum dyed black and shall conform to type A, class 2, sub-class b, of KK-L-254. The color shall be struck through from grain to flesh, and shall be uniform throughout. The minimum wet and dry crocking colorfastness shall be Munsell 7.5 (wet) and Munsell 8.5 (dry). The finished leather shall have a thickness of 1-1/2 ounces (minimum) to 2-1/4 ounces (maximum). Folds or wrinkles more than 1/16 inch wide in the flat are not acceptable. The requirements for total ash, chromic oxide, and pH are not applicable The leather shall not discolor the water in the shrinkage temperature test. Thickness determinations shall be made as specified in 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

3.3.1.2 Cattlehide. The leather used for sizes 3, 4 and 5 shall be full grain, chrome tanned cattlehide, and shall be treated with an approved water resistant compound (see 6.2). After the water resistant compound has been applied, the leather shall not be exposed to oils, soaps, detergents, wetting agents, or other surfactants. The leather shall be drum dyed black and shall conform to type I, class a or b, treatment A of MIL-L-40051, except that the thickness shall be not less than 1-1/2 ounces nor more than 2-1/2 ounces at any place in the finished glove, and the minimum stitch tear strength for leather of a thickness less than 2 ounces shall be not less than 12 pounds. Thickness determinations shall be made as specified in 4.4.4. The color shall be uniform throughout.

3.3.2 Lining.

3.3.2.1 Backing and facing fabrics. The backing fabric shall be 2-bar tricot knitted with 15 denier nylon monofiliment fiber. The facing shall be 2-bar tricot knitted with 20 denier polyester monofiliment polyester yarn in the wales and 50 denier 40-filiment polyester yarn in the courses, and shall be napped by lightly brushing the side where the multifiliment yarn predominates. The fabrics shall meet the physical requirements specified in table I.

TABLE I. Physical requirements of backing and facing fabrics

Characteristic	Requirement		Test method
	Backing	Facing	
Color	Natural	Beige	
Weight, ounces per square yard			5041 1/
min	0.4	1.5	
max	0.8	2.0	
Fabric count:			
Wales/inch (min)	20	20	5070 1/
Courses/inch (min)	20	40	5070 1/
Bursting strength, lbs. (min)	20	40	5120 1/
Colorfastness to crocking (min):			
Dry	--	Good	5651 1/
Wet	--	Good	5651 1/
Colorfastness to water (min)	--	Good	5630 1/

1/ FED-STD-191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

3.3.2.2 Polyester insulation. The insulation to be adhered to the backing and facing fabrics shall be a polyester batt meeting the requirements of MIL-B-44346, except that the thickness and weight shall be as specified in table II.

TABLE II. Physical requirements of polyester insulation

Characteristic	Requirement		Test method
	Minimum	Maximum	
Thickness, inches	0.25	---	5030 1/ 2/
Weight, ounces per square yard	2.7	3.3	5041 1/ 3/

1/ FED-STD-191.

2/ Measured using a thickness gauge with a 12 by 12 inch pressure foot applying a load of 0.002 pounds per square inch.

3/ Except that six 12 by 12 inch square specimens shall be tested. The individual and mean weight of the six specimens shall be reported to the nearest 0.1 ounces per square yard.

3.3.2.3 Finished lining. The finished lining (nylon backing/polyester batting/polyester facing laminate) shall be constructed by bonding the float side of the nylon backing fabric to one side of the polyester batt and bonding the float (unnapped) side of the beige polyester facing fabric to the other side of the polyester batt. The finished lining shall meet the physical requirements of table III (see 6.8).

TABLE III. Physical requirements of finished lining

Characteristic	Requirement		Test method
	Minimum	Maximum	
Thickness, inches	1/4	---	5030 1/2/
Drape stiffness, inches	---	3-5/16	5206 1/
Bond strength, backing and facing fabrics/polyester insulation, pounds per inch width:	1/5	---	5951 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

1/ FED-STD-191.

2/ Measured using a thickness gauge with a 12 by 12 inch pressure foot applying a load of 0.002 pounds per square inch

3.3.3 Waterproof insert. The waterproof insert shall be W.L. Gore, Style M-1, sizes small and large, or equal (see 6.7). Prior to the use of the " or equal" product, the contractor shall furnish samples, with supporting data, to the contracting officer for subsequent evaluation by the U.S. Army Natick Research, Development, and Engineering Center.

3.3.4 Adhesive. The adhesive for bonding the shell to the waterproof insert shall be Dow Corning #732 clear RTV silicone or equal (see 6.8). Prior to the use of the "or equal" product, the contractor shall furnish samples, with supporting data, to the contracting officer for subsequent evaluation by the U.S. Army Natick Research, Development and Engineering Center.

3.3.5 Buckles. The buckles shall be 2-bar, tongueless, lip type, conforming to type II, style 3, class 3, size 5/8 inch of MIL-B-543.

3.3.6 Tape. The tape for the loop and buckle strap shall be 5/8 inch wide, type I, class 3 of MIL-T-43566, except that the dyed tape shall show an AATCC Chromatic Transference Scale rating for crocking not lower than 1.5 for wet crocking and 3.5 for dry crocking. The color of the tape shall be black.

3.3.7 Thread. The thread for stitching and hemming size 1 and 2 gloves shall be black nylon, conforming to size B, type II, with approved class B nonwicking finish, of V-T-295. The thread for stitching and hemming size 3, 4, and 5 gloves shall be black nylon, conforming to size E, type II, with approved class B nonwicking finish, of V-T-295. The thread for stitching the lining unit and for attaching the lining to the waterproof insert shall be natural nylon conforming to size B, type I or II, of V-T-295. As an alternate, cotton-covered polyester thread conforming to ticket #70 of A-A-50199, water-resistant treated in accordance with MIL-T-3530, may be used for stitching the lining.

3.3.8 Snap hook and dee. The snap hook shall be Waterbury Buckle Company No. 00520-23-22857 or equal. The dee shall be Waterbury Buckle Company No. 00133-20-21820 or equal (see 6.9).

3.4 Label. Each glove shall have a combination size and identification label conforming to type VI, class 4 of DDD-L-20. The label shall show fastness to laundering transference as specified therein. The label shall include the following information:

Gloves, Men's and Women's
Intermediate Cold/Wet
U.S. Patent No. 4654896
Contract No.
Contractor's Name
Size

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

3.5 Instruction slip. A printed slip of thin paper containing instructions as indicated below shall be inserted in each right hand glove.

INSTRUCTIONS

1. Gloves are not designed for heavy work such as rappelling or barbed wire handling, for hot work such as welding or changing machine gun barrels, or for use by POL handlers. Use other handwear for such activities.
2. Wear gloves alone or with Glove Inserts, Cold Weather, Lightweight. Do not wear with thicker inserts.
3. Fit gloves snugly but not tightly over the inserts.
4. Adjust strap for snug but not tight fit.
5. Gloves are available in five sizes: 1, 2, 3, 4, 5 (XS to XL).
6. Gloves have waterproof/"breathable" linings but may become wet from perspiration--change glove inserts when damp, and dry wet gloves and glove inserts away from flames or extreme heat.
7. Clean shells by placing gloves on hands and washing outside with cold water and mild low-suds soap (such as liquid Woolite^{R}), rinsing thoroughly. Do not use detergents or solvents.
8. Treat outside of shells with fluorocarbon spray (such as Scotchgard^{R} Leather Protector); do not use oils, wax, polish, or silicone.

3.6 Design. The gloves shall be a slip-on, inseamed, Flexor^{R} design with a wing thumb, having a leather shell, waterproof/moisture vapor permeable insert, microfiber insulation and polyester lining, buckle/strap adjustment on the back, and a snap hook/dee at the wrist (see 6.5 and figure 1).

3.7 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for making the contractor's working dies. The working dies shall be identical to the standard patterns.

3.7.1 List of pattern parts. The pattern parts and cutting quantities for the gloves shall be as listed in table IV.

TABLE IV. List of pattern parts

	Nomenclature	Cutting quantity per pair
Shell	Finger palm (left & right)	2
	Finger back (left & right)	2
	Thumb back (left & right)	2
	Hand palm (left & right)	2
	Hand back (left & right)	2
	Palm patch (left & right)	2
	Hook/dee tab	2
	Back welt	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

TABLE IV. List of pattern parts (cont'd)

Nomenclature		Cutting quantity per pair
Lining	Finger palm (left & right)	2
	Finger back (left & right)	2
	Thumb back (left & right)	2
	Hand palm (left & right)	2
	Hand back (left & right)	2

3.8 Construction.

3.8.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in table V shall conform to FED-STD-751. Seam allowances shall be maintained with seams sewn so that raw edges, twists, pleats, or puckers will not result. All seams shall start and finish evenly. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch.

3.8.1.1 Type 301 stitching. Ends of all seams and stitching, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessivly tight stitching resulting in puckering of the materials sewn.

3.8.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the material and restitching in the required manner.

1/ When making these repairs, the ends of the stitching are not required to be backstitched.

3.8.1.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be made in accordance with 3.8.1.1.1a and 3.8.1.1.1b. Repairs to type 401 stitching may be accomplished by use of stitch type 301.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

3.8.1.3 Type 503 or Ossan stitching. Thread tension shall be maintained such that when the two pieces of base fabric joined by the stitching are gently pulled perpendicular to the seam, the needle thread shall be barely visible and there shall be no visible spaces between the stitches. No sign of puckering shall be observed in the materials sewn. All repairs shall be made in accordance with 3.8.1.1.1a and 3.8.1.1.1b. In addition, if all layers of the lining material are not caught in the stitching, the defective area shall be repaired by overstitching using stitch type 301. The stitching shall start a minimum of 1/4 inch back of the defective area, continue over the defective area, and continue a minimum of 1/4 inch beyond the defective area onto the existing stitching.

3.8.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table V.

3.9 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table V, provided that the seam and stitch type are as specified and the finished component conforms to the required configuration, except that trimmer attachments, other than thread undertrimmer, are not allowed.

3.10 Manufacturing operations requirements. The gloves shall be manufactured in accordance with the operation requirements specified in table V. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, provided the waterproof membrane is not penetrated at any time and the thread is removed or does not show in the finished gloves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Before cutting the leather, all skins shall be examined for defects. Skins shall be sorted such that softer, thinner hides are used to construct fingers portions. Stiffer, thicker skins shall be used for hand palms and backs and palm patches. The skins may be dampened with tap water and excess stretch shall be removed by staking, toggling or other means. b. All pieces except the welts and hook and dee loops shall be die cut. The welts may be hand cut and shall be 3/16 ± 1/16 inch wide and of sufficient length that they extend to within 1/8 inch of side seam in finished glove but are not caught in the side seam. The hook and dee loops may be hand cut and shall be 3/8 ± 1/16 inch wide and 1-1/2 ± 1/8 inch long. c. The linings shall be cut such that the hand backs and palms are oriented parallel to the long direction of the fabric and fingers are cut on the bias. d. Inspect cut materials to ensure that: 1. Leather parts are not defective and are completely dyed-through. 2. Lining parts have no thin spots in the insulation and the backing and facing are properly laminated.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) 3. All parts match government patterns or tolerances within 1/16 inch in all dimensions.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to ensure that material defects and damages, as classified in 4.4.3, are excluded and replaced with non-defective and properly matched components. Repairs such as mends, patches, or splices are not permitted.						
3.	Marking. a. Mark, ticket, or bundle all cut leather parts to ensure a uniform size throughout each glove. b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sew-on tickets. (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets. c. Inspect to ensure: 1. All pieces for each glove have proper outnicks for each size.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Construct outer shell.						
	a. Fold each finger and thumb back on the upper notch toward the fingertip and align the folded edge even with the lower notch, such that a pleat, not less than 1/4 + 1/16 inch in width oriented toward the hand, is formed. Tack the pleats 1/16 ± 1/16 inch from each edge (see Figure 2.B). Start the stitching not less than 1/8 inch before the pleat and extend it at least 1/8 inch beyond the pleat.	301 (reverse double-stitch) or bartack	OSe-1	6-8	Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	b. Inspect to ensure that: 1. All finger backs and thumb backs are pleated toward the base of the fingers, and notches are aligned within 1/16 inch. 2. Stitching is not less than 1/32 or more than 3/32 inch from raw edge. 3. Leather is not cut by stitching pleats.						
	c. Open the finger back "star" such that the inside square forms a straight line and align the finger back and hand back, with the fourth finger toward the notched side of the hand back (see Figure 2.A). Insert the welt between the two pieces and center (see Figure 1.A). Stitch all three layers together inseam using a 1/8 ± 1/16 inch gage seam.	301	SSj-1	9-11	Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	d. Inspect to ensure seam gage is correct and that: 1. Welt is inseam and seam has caught all three layers throughout length of welt.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Construct outer shell. (cont'd)						
	2. Welt is centered and not less than 1/4 or more than 3/8 inch from raw edge.						
	e. Buckle and adjustment strap assembly shall be composed of an adjusting strap, buckle and buckle loop (see Figure 1.C). Cut the adjustment strap to a length such that the hemmed edge shall extend not less than 5/8 ± 1/8 inch beyond the lip of the buckle when the finished glove is opened to its full width. Thread the adjustment strap over the buckle bar, turn the end under twice and double stitch (a 28 stitch bar tack may be substituted) to make a 3/8 inch hem with no raw edge. Cut the buckle loop not less than 2 ± 1/8 inch long and insert it in the buckle. The ends of both the buckle and adjustment strap shall be bartacked or double-stitched to prevent unraveling before tacking onto the glove.	301	EFb-1	9-11	Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	f. Center the adjustment strap and buckle loop between the notches on the hand back and bartack to the shell, such that they will be caught in the side seam when the glove is closed; the adjustment strap shall be attached to the side of the glove opposite to the thumb and the buckle loop shall be attached to the side of the glove adjacent to the thumb.	301 or 401	Bartack	28 (total)	Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	g. Inspect to ensure that seam gage is correct and that adjustment strap and buckle loop assembly is properly assembled and is parallel with bottom edge of hand back and on correct side of hand.						
	h. Thread attachment tab through the hook or dee (dee shall be attached to right glove and hook to left	301 or 401	I.Sa-1	9-11	Sizes B	1 and B	2

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Construct outer shell. (cont'd)						
	glove). Align the tab immediately below the adjustment strap and the hem on the side away from the thumb and bartack to the shell, such that it will be caught in the side seam when the glove is closed.				Sizes E	3, 4, E	and 5
	i. Inspect to ensure seam gage is correct and that hook or dee is on side away from thumb, and hook is on left glove and dee is on right glove.						
	j. Open the finger palm "star" such that the inside square forms a straight line. Lap the finger palm over the hand palm such that it is aligned with the notches on the hand palm. Stitch together with 1/8 ± 1/16 inch gage seam (see Figure 1.B).	301	LSa-1	9-11	Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	k. Inspect to ensure that seam gage is correct.						
	l. Align palm patch with thumb crotch and notch on hand palm and stitch together at edges of palm patch using double needle machine, 1/8 ± 1/16 inch gage. Smooth out wrinkles as sewing foot crosses fingers. Palm patch stitching shall cover seam between finger palm and hand palm (see Figure 1.B).	301	LSa-2		Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	m. Inspect to ensure that seam gage is correct and that seam has not caught wrinkles in fingers.						
	n. Align the thumb back with the hand palm and stitch together, 1/8 ± 1/16 inch gage, starting at the palm patch.	301	SSa-1	9-11	Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	o. Inspect to ensure that seam gage is correct and that thumb is not twisted.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check date source was downloaded. Use latest version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Construct outer shell. (cont'd)						
	p. Align the back assembly with the palm assembly, and close shell by stitching together with a 1/8 ± 1/16 gage seam, with the back assembly on top, starting at either the fourth finger side (right glove) or index finger side (left glove). Take care to sew to the inboard side of the finger pleat tacks and catch the ends of the threads used in joining the fingers to the hand pieces. The side seams shall catch the adjustment strap and buckle loop and hook or dee loop.	301	SSa-1		Sizes B Sizes E	1 and B 3, 4, E	2 and 5
	q. Inspect to ensure seam gage is correct and that:						
	1. Fingers and thumb are not twisted.						
	2. Front and back assemblies are properly aligned.						
	3. Welt is not caught in closing seam.						
	4. Buckle loop and adjustment strap are caught in closing seam.						
	5. Buckle loop is not less than 1/4 inch or more than 5/8 inch long.						
	6. Hook and dee loops are caught in closing seam and are not less than 3/8 or more than 5/8 inch long.						
	7. Thread ends from joining finger and palm pieces are caught in closing seam.						

Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Construct outer shell. (cont'd) 8. Closing seam is on top or inboard of finger pleat tacks. r. Shell assembly shall be turned. s. Inspect to ensure that finger or other seams are not distorted or broken and leather is not torn or unduly stretched. t. After turning, shell shall be placed on appropriately sized electrical handforms heated to approximately 300°F or steam handforms heated to approximately 225°F. The shells may be dampened with tap water and shall be laid off and properly shaped. u. Inspect to ensure that: 1. Thumb and fingertips are fully opened with ends well rounded. 2. Finger side seams are straight and parallel to the glove side seams. 3. Finger pleats are smoothly tucked. 4. Lengths of the front and back of the glove match within 1/2 inch. 5. Welt is not caught in, or more than 1/4 inch from, side seams.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Construct liner.						
	a. Open the finger back "star" such that the inside square forms a straight line, align it with the hand back, and stitch together, 1/8 ± 1/16 inch gage, leaving a thread tail on both ends.	single-thread Ossan or 503		6-8	B	B	
	NOTE: Ossan stitch shall be sewn on a Bonis No. 1332 or Singer No. 176-25 sewing machine, or equal. Prior to the use of the "or equal" sewing machine, the contractor shall furnish samples, using specified fabric, to the contracting officer for subsequent evaluation at the U.S. Army Natick Research, Development, and Engineering Center.						
	b. Inspect to ensure that seam gage is correct.						
	c. Open the finger palm "star" such that the inside square forms a straight line, align it with the hand palm, and stitch together, 1/8 ± 1/16 inch gage, leaving a thread tail on both ends.	single-thread Ossan or 503	SSa-1	6-8	B	B	
	d. Inspect to ensure that seam gage is correct.						
	e. Align the thumb back with the hand palm and stitch together, 1/8 ± 1/16 inch gage, leaving a long thread tail on both ends.	single-thread Ossan or 503	SSa-1	6-8	B	B	
	f. Inspect to ensure that seam gage is correct and thumb is not twisted.						
	g. Align the back assembly with the palm assembly and stitch together, 1/8 ± 1/16 inch gage, starting at either the fourth finger side (right glove) or	single-thread Ossan or	SSa-1	6-8	B	B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Construct liner. (cont'd)						
	index finger side (left glove). Catch the ends of the threads used in joining the fingers to the hand, leaving a thread tail at both ends.	503					
	h. Inspect to ensure that:						
	1. Seam gage is correct.						
	2. Fingers are not twisted.						
	3. Napped (beige) side faces inside on all pieces.						
6.	Assembly.						
	a. Align fingertips of waterproof insert to fingertips of lining on palm side (use small insert for sizes 1 and 2 and large insert for sizes 3, 4, and 5). Stitch together with at least 5 stitches per finger, 1/8 ± 1/16 inch gage, leaving a thread tail on both ends of each finger.	301 or 401 (double stitch)	SSa-1	6-8	B	B	
	b. Inspect to ensure that:						
	1. Seam gage is correct and proper thread tail is present.						
	2. No holes are present in insert and stitching has not penetrated into sealed area of insert or beyond sewn area of lining fingertips.						
	3. Insert is attached on palm side of lining.						
	c. Turn insert over lining.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Assembly. (cont'd)						
	d. Inspect to ensure that:						
	1. Sealed seam or other part of insert is not punctured, torn or distorted.						
	2. Fingers of liner and insert are straight, fully extended, rounded and without wrinkles.						
	e. Dispense 0.75 ± 0.10 cc of adhesive onto pleated side of the inside of each fingertip in leather shell, insert lining assembly into shell, and place entire glove on an appropriate handform such that the shell, insert, and lining fingers are straight and insert and lining fingers are fully and smoothly extended into fingers of shell (these steps shall be completed before adhesive has significantly cured--approximately 15 minutes). Remove glove from handform such that positions of insert fingertips in shell are not disturbed.						
	f. Inspect to ensure that shell, insert and lining fingertips are completely inserted, are not twisted and are free of lumps or wrinkles.						
	g. Set glove aside until adhesive is set (approximately 1 hour).						
	h. Turn the hem of the outer shell 3/8 inch over insert and lining, insert the top edge of the label at the center of the top edge with the printed side displayed, and stitch closed, gage 1/4 ± 1/16 inch.	301	EFa-1	9-11	Sizes B Sizes E	1 and B 3, 4, E	2 and 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

NO.	TABLE V. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Clean gloves. a. Trim all thread ends to not more than 1/8 inch. The insert and lining shall be trimmed so that they are completely covered by the edge of the leather. b. Remove all loose threads and shade and size markings.						
8.	Pair gloves. a. Match and pair the gloves by fastening the snap hook to the dee. b. Inspect the gloves to ensure that they are clean and properly matched.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check that source is current version before use.

3.10.1 Figures. Figures 1 and 2 are furnished for information purposes only. If there are any inconsistencies between the specification and the figures, the specification shall govern.

3.11 Finished measurements. The finished measurements shall be as shown in Table VI.

TABLE VI. Measurement of gloves (inches)

Size	Overall length 1/	Width
1	10-3/4	4-1/2
2	11-1/8	4-3/4
3	11-1/2	5
4	11-7/8	5-1/4
5	12-1/4	5-1/2
Tolerance	± 1/4	± 1/4

1/ The glove length shall be measured from tip of middle finger to edge of cuff.

2/ The glove width shall be gently stretched out and measured 1/2 inch from base of little finger.

3.12 Workmanship. The finished gloves shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Repsonsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4, and shall be tested for the characteristic specified in 4.4.5.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component and material certification. The contractor shall submit a certification of compliance stating the following:

a. Only tap water has been used for dampening the leather prior to cutting it, and prior to forming the finished glove shell.

b. That no additive has been added to the tap water used for dampening the leather.

c. That an approved compound has been used to treat the leather for water resistance (sizes 3, 4, and 5 only).

d. That the thread used for sewing the outer shell has been treated with an approved non-wicking finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

e. That the insulation utilized meets the requirements of MIL-B-44346 and that the lining supplied meets the requirements specified herein.

f. That approved waterproof inserts have been supplied.

4.4.2 In-process inspection. Inspection of subassemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance.

4.4.3 End item visual examination. The end items shall be examined for the defects listed in table VII. The lot size shall be expressed in units of gloves. The sample unit shall be one glove and selection shall be by pairs. Defects for pairing shall be classified as a single defect. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

TABLE VII. End item visual defects

Examine	Defect	Classification	
		Major	Minor
Pairing	Right and left not the same size	101	
	Not hooked together		201
Color	Shell not black	102	
	Lining not beige		202
	Shell or lining color not uniform		203
Hardware	Not finished as specified, or areas with no finish		204
	Any burr, sliver, or distortion of shape	103	
	Not specified color	104	
	Not functional, i.e., buckle does not secure tape, or snap and dee cannot be fastened	105	
Shell or lining design	Not as specified (incorrect material, pattern, etc.)	106	
Cleanness	Spots or stains clearly noticeable affecting appearance		205

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

TABLE VII. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Leather	Hole (except a pinhole or needle hole), cut, tear or rip	107	
	Three or more unspecified pinholes or needle holes		206
	Not full grain	108	
	Fingers not soft and flexible	109	
	Grain damage or imperfections:		
	- seriously affecting serviceability or appearance	110	
	- affecting serviceability or appearance, but not seriously (not applicable to minute surface break providing the condition or frequency of same does not have serious effect on appearance)		207
	Deep open scratch	111	
	Deep wrinkles seriously affecting serviceability or appearance	112	
	Wrinkles affecting serviceability or appearance, but not seriously		208
	Scar or abraded area:		
	- seriously affecting serviceability or appearance	113	
	- affecting serviceability or appearance, but not seriously		209
	Brittle, bony area, or thin spot:		
	- seriously affecting serviceability	114	
	- affecting serviceability, but not seriously		210
	Loose or spongy leather	115	
	Flanky leather:		
	- seriously affecting serviceability or appearance	116	
	- affecting serviceability, but not seriously		211
Lining	Facing delaminated		212
Tape	Not type or color specified	117	
	Hole, cut, tear or rip, float, smash or other defect:		
	- affecting function	118	
	- not affecting function		213

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

TABLE VII. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction, and workmanship; general (applicable to all components unless otherwise indicated herein)	Component misplaced, operation omitted, or operation not properly performed	119	
	Lining reversed so that nylon tricot backing is oriented toward hand	120	
	Component missing or not securely affixed	121	
	Mend in leather or fabric (i.e., patch - not applicable to restitched seam repair)	122	
	Needle chews likely to develop into a hole	123	
Seams and stitching	Open seam:		
	- in single stitched seam	124	
	- in any row of a double stitched seam	125	
	- not repaired as specified (when applicable)		214
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or run-off stitches occur.		
	Not specified seam type	126	
	Not specified stitch type	127	
	Row of stitching omitted	128	
	Loose stitch tension resulting in a loosely secured seam	129	
	Tight stitch tension resulting in cutting of leather or breaking of stitches when normal pull is applied	130	
	Ends of stitching not secured as specified		215
	Gage of stitching irregular or not as specified, affecting appearance	131	
	Part caught in unrelated row of stitching	132	
	One or two stitches per inch less than specified		216
	Three or more stitches per inch less than specified	133	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

TABLE VII. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction, and workmanship; general (applicable to all components unless otherwise indicated herein) (cont'd)	Not backstitched where required	134	
	More than the specified maximum number of stitches per inch:		
	- damaging materials	135	
	- not damaging materials		217
Assembly detail	Glove not neatly laid off:		
	- wrinkles in shell		218
	- fingers not completely opened	136	
	Not inseam construction where specified	137	
	Welt omitted on back	138	
	Welt is too short:		
	- more than 1/4 inch from either seam		219
	Welt not completely caught in seam		220
	Welt too long:		
	- caught in closing seam		221
	Pleats missing from any finger or thumb	139	
	Shell more than 1/4 inch longer than lining in any finger when on hand-form	140	
	Poorly assembled seriously affecting serviceability (finger distorted or twisted affecting confort of wearer or seam of finger may come in contact with object, buckle backwards, etc.)	141	
	NOTE: Any construction defect that results in a malformed glove such as a twisted finger or thumb resulting in any seam lying in the palmar area of the finger or thumb is a minor defect. When a finger or thumb is twisted and the seam is rotated to less than 45 degrees from the vertical and does not lie in the palmar area, it is a minor defect.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

TABLE VII. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Assembly detail (cont'd)	Poorly assembled affecting serviceability but not seriously (buckle and adjusting strap not sewn in alignment causing malformation when strap is tightened, snaphook and dee not properly placed, etc.)		222
	Waterproof insert and/or lining not securely fastened to shell at fingertips	142	
	Improper application of adhesive in fingertips:		
	- affecting dexterity or comfort (lumps, lining twisted, wrinkled or bunched, etc.)	143	
	- affecting appearance (stains on shell, etc.)		223
	Lining and/or insert not caught in cuff hem	144	
	Thread ends not trimmed throughout glove		224
	Not constructed with specified number of pieces	145	
	Difference in overall length between front and back of glove is more than 1/2 inch	146	
Label and Instruction Slip	Omitted, incorrect, illegible, or misplaced; size and identification label not securely sewn in wrist hem		225

4.4.4 End item dimensional examination. The end items shall be examined for conformance to the thicknesses specified in 3.3.1 and to the dimensions specified in table VI. Any thickness dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of gloves. The sample unit shall be one glove and the selection shall be by pairs. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

NOTE: Determination of leather thickness in the finished glove shall be accomplished by measuring a folded sample area and dividing by two. Thickness shall be determined in accordance with Method 1011 of FED-STD-311.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

4.4.5 End item leakage testing. The end items shall be tested for leakage in accordance with 4.4.5.1 and 4.4.5.2. The lot size shall be expressed in units of gloves. The sample unit shall be one glove, and the selection shall be by pairs. The inspection level shall be S-4. Any test failure shall be cause for the rejection of the lot.

4.4.5.1 Testing apparatus. The test apparatus shall consist of a 3 inch inside diameter tubular rigid polyvinyl chloride test chamber approximately 12 inches in length. The chamber shall be capped approximately 2 inches from the bottom with the cap having a 1/2 inch diameter plastic air escape tube approximately 3 inches long. The test chamber shall be oriented vertically and placed in a container filled with approximately 1 inch of water such that the escape tube vents to the outside of the chamber, with the end of the tube under the water. The top of tube shall be beveled at a 45° angle on the inside. The top plug shall consist of polyethylene, approximately 4 inches in height, and 4 inches in diameter at the top tapering to approximately 2 inches in diameter at the bottom. An air passage shall be provided vertically through the plug and connected via nominal 1/2 inch tubing through a gage and air regulator to an oil-free compressed air source. A mechanism shall be provided that is capable of reproducibly clamping the plug into the end of the tube such that a seal is provided (see 6.10).

4.4.5.2 Testing procedure. The glove shall be inserted into the test chamber to near the cuff. The plug shall be inserted into the cuff of the glove and clamped such that a seal that holds not less than 5 psi is formed with the beveled edge of the test chamber. Air shall be provided to the chamber to a level of 5 psi for a period of not less than 5 seconds. Appearance of air bubbles at 5 seconds constitutes failure.

4.4.6 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior or interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged or not as specified
Workmanship	Inadequate application of components such as: incomplete sealing or closure of container flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number of gloves per shipping container is more or less than specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

4.4.7 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each pair of gloves shall be unit packed in a plastic bag conforming to A-A-50083.

5.1.2 Commercial preservation. Gloves shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Forty-eight pairs of gloves of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of the shipping container shall be approximately 20 inches in length, 15 inches in width and 10 inches in depth for sizes 1 and 2, and 22 inches in length, 17 inches in width and 11 inches in depth for sizes 3, 4, and 5. Each shipping container shall be closed, waterproofed, and reinforced with strapping or tape banding in accordance with the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Forty-eight pairs of gloves of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of the shipping container shall be approximately 20 inches in length, 15 inches in width and 10 inches in depth for sizes 1 and 2, and 22 inches in length, 17 inches in width and 11 inches in depth for sizes 3, 4, and 5. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of PPP-B-636.

5.2.3 Commercial packing. Gloves, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), gloves packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 95 for sizes 1 and 2 and number 6 for sizes 3, 4, and 5 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The gloves are intended as protection from environmental conditions for the hands of soldiers performing their mission in intermediate cold and wet climates encompassing approximately a 0°F to 40°F temperature range. They may be worn alone or over lightweight glove inserts. These gloves are not intended for heavy work.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3 and 6.3).
e. List of approved water-resistant compounds (see 3.3.1).
f. Levels of preservation and packing (see 5.1 and 5.2).
g. Type and class of unit load required (see 5.2.1).
h. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
i. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Federal Acquisition Regulation (FAR) 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Patent notice. U.S. Patent number 4654896 covers the Flexor^{R} design of this item as described in 3.6 of this specification. The Government does not have a royalty-free license for this patent. Information regarding license for production of gloves meeting this specification may be obtained from:

Rinehart Glove, Ltd.
P.O. Box 12377
Aspen, CO 81612

6.6 Lining fabric. Finished lining fabric meeting the requirements of 3.3.2.3 is available from:

International Foam Products, Inc.
771 Commercial Avenue
Carlstadt, NJ 07072

6.7 Waterproof glove inserts. Glove inserts meeting the requirements of 3.3.3 are available from:

W.L. Gore and Associates
3 Blue Ball Road
Elkton, MD 21921

6.8 Adhesive. Adhesive meeting the requirements of 3.3.4 is available from:

Dow Corning Corporation
Midland, MI 48686-0994

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

6.9 Snap hooks and dees. Snap hooks and dees meeting the requirements of 3.3.8 are available from:

Waterbury Buckle Co.
952 South Main Street
Waterbury, CT 06721

6.10 Testing apparatus. A test apparatus meeting the requirements of 4.4.5.1 is available from:

W.L. Gore and Associates
3 Blue Ball Road
Elkton, MD 21921

6.11 Subject term (key word) listing.

Handwear
Hand protection
Waterproof

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

(Project 8415-0784)


Review activities:

Army - MD
Air Force - 11, 82
DLA - CT

User activities:

Navy - MC
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

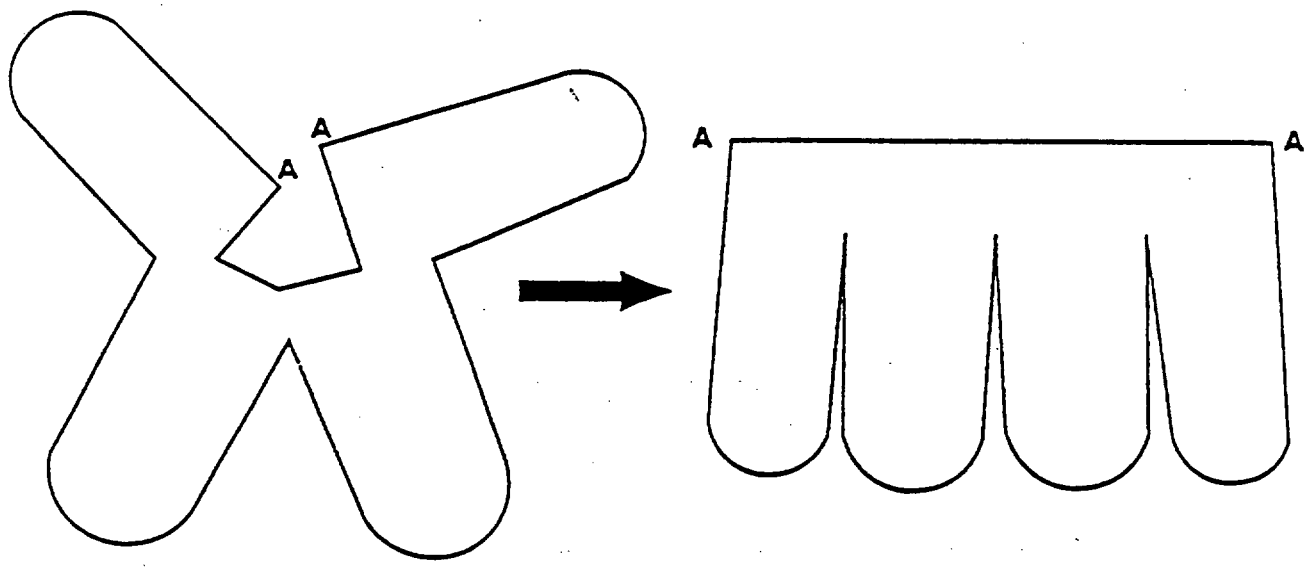

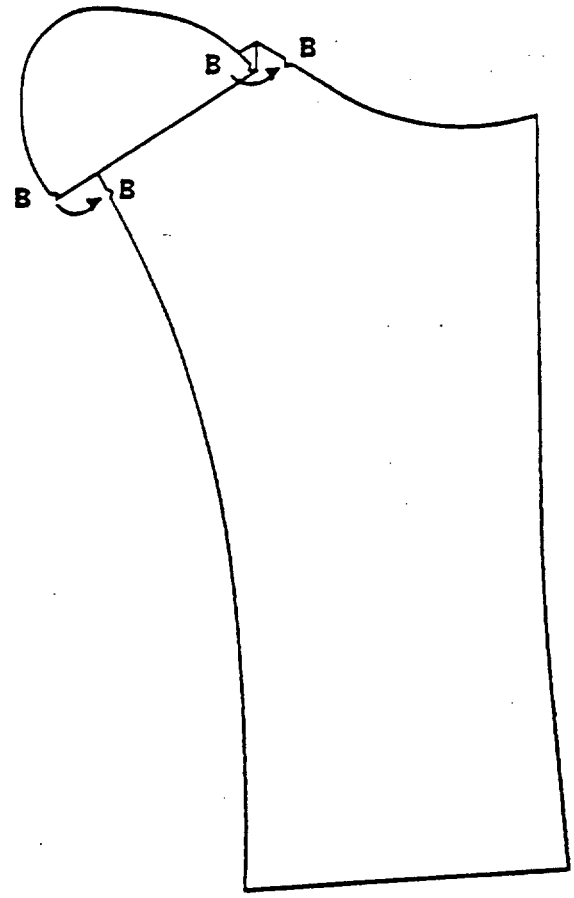


Figure 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:58Z
Check the source to verify that this is the current version before use.

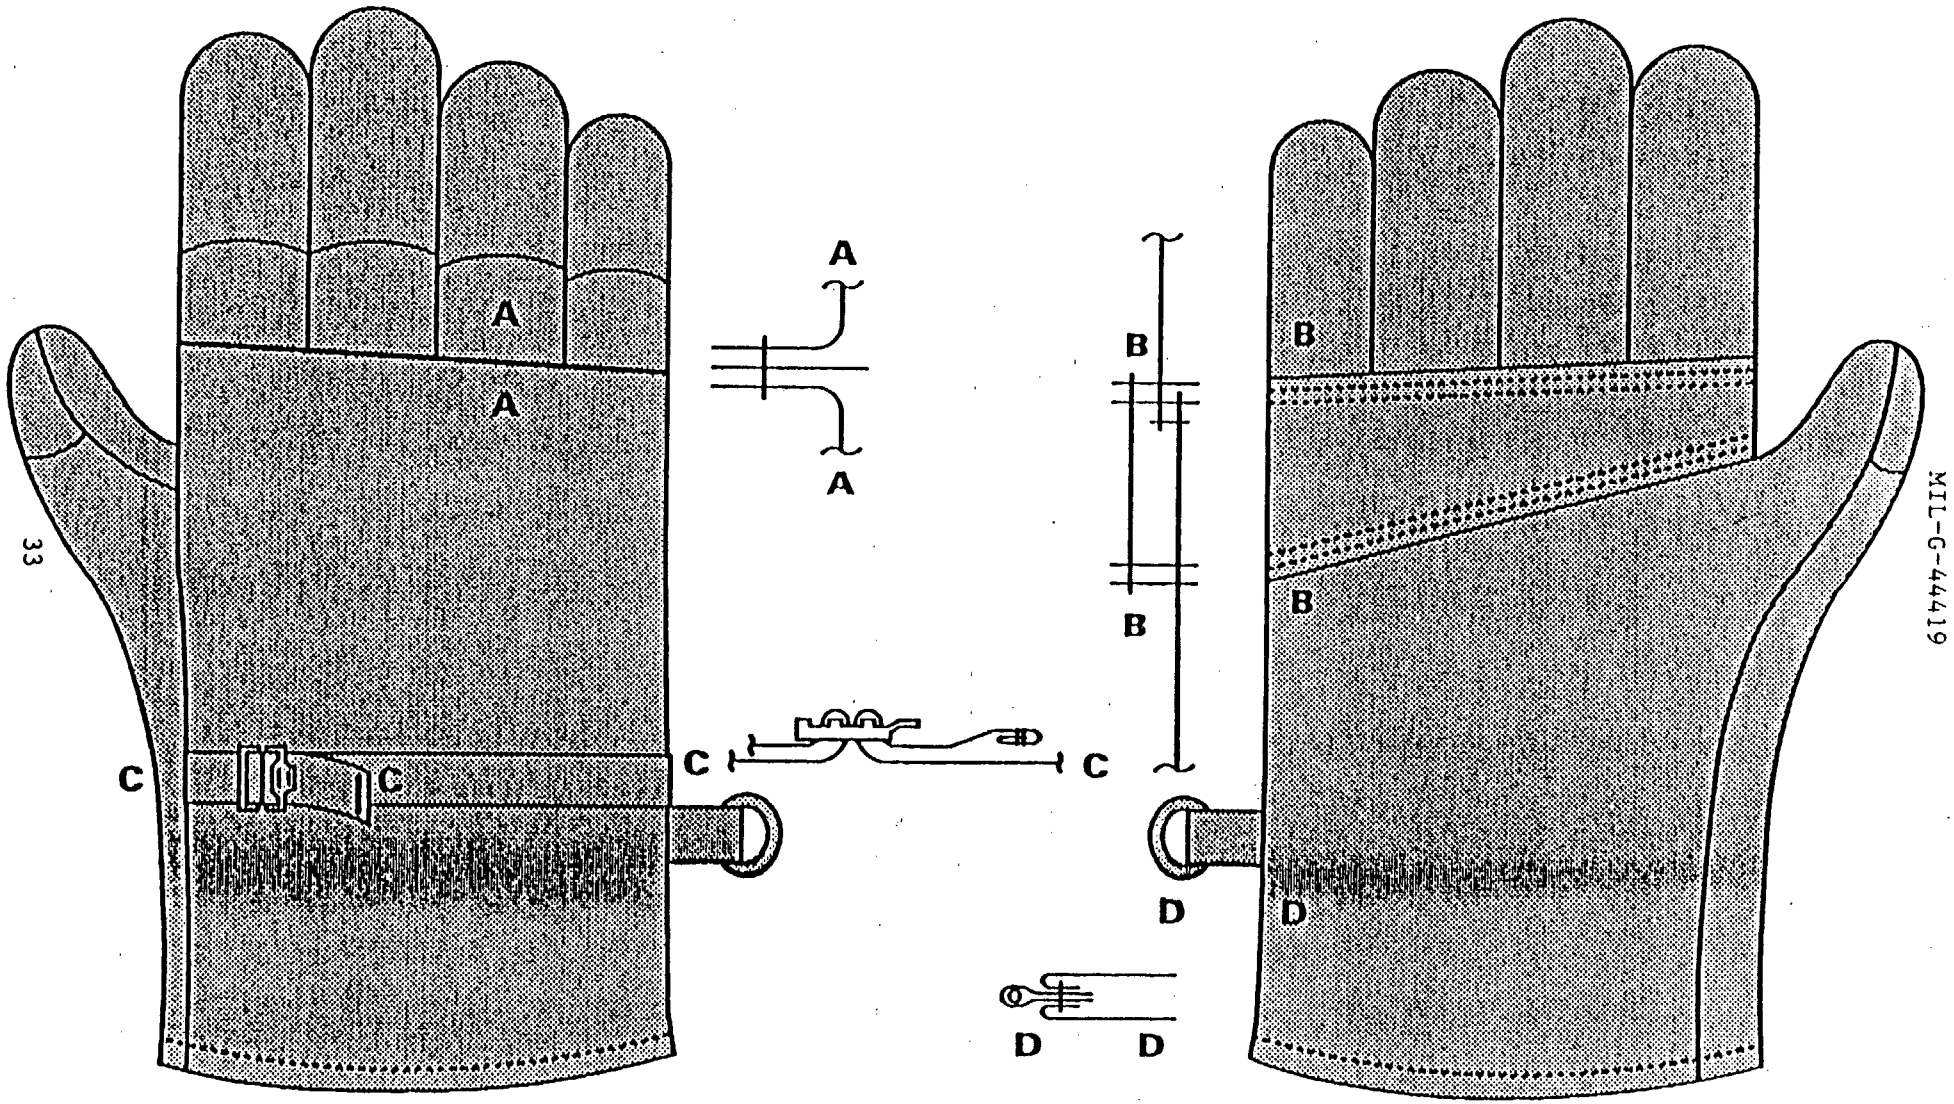


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2025-10-22T01:58Z
Check the source to verify that this is the current version before use.