INCH-POUND

MIL-DTL-3943/393
7 December 2016

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, DEPARTMENT OF JUSTICE, ATTORNEY GENERAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.



OBVERSE SUPENSION



REVERSE COMMUNITY POLICING



REVERSE FIELD OPERATIONS



REVERSE CRIMINAL INVESTIGATIONS

DASH NO.
-1: Community Policing

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:23Z
Check the source to verify that this is the current version before use.

-2: Field Operations
-3: Criminal Investigations

MATERIAL: Red Brass 85/15 (UNS Alloy No. C230)

FINISH: Epoxy resin, 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.


DIMENSIONS:
HEIGHT (Including lug):
PENDANT: 2-15/16 inches (REF)
SUSPENSION DEVICE: 1-1/16 inch (REF)
ASSEMBLED: 3-1/8 inches ± 1/32 inch
WIDTH:
PENDANT: 2-3/16 inches (REF)
SUSPENSION DEVICE: 5/8 inch (REF)
THICKNESS (Across center):
PENDANT: 0.182 ± 0.010 inch
SUSPENSION DEVICE: 0.141 ± 0.010 inch

DECORATION SET: The decoration set shall consist of a pendant with neck drape, service ribbon, ribbon attachment and lapel button all packaged in a decoration case conforming to MIL-C-14633, Type XV, Style 5, with a Class 1 pad. The following text shall be inscribed on the top of the presentation case using 2 lines: (Line 1) DISTINGUISHED SERVICE (Line 2) MEDAL (Line 3). *This will change based on the award issued*. (CRIMINAL INVESTIGATIONS, FIELD OPERATIONS, COMMUNITY POLICING). Lettering shall be accomplished using Bodoni MT Bold type face, 20 point caps for the first letter in each word and 18 point caps for all other letters. The words "UNITED STATES OF AMERICA" shall be accomplished using upper case, Copper Plate, 10 Point Gothic.

NECKBAND: The neckband shall conform to figure 9 in the latest version of MIL-DTL-3943, except that the manufacturer shall increase the length of the neckband to 26 inches + 1/2 inch.

SUSPENSION RING: The suspension device shall be secured to the pendant by using a hinge joint. The hinge shall be 1/8 inch ± 1/64 high by 3/16 inch ± 1/64 deep. The suspension ring through which the ribbon passes and the hinge shall be made of Red Brass, 85/15 (UNS Alloy C-230) and shall be soldered to the device as shown below. The suspension ring shall be joined to the pendant in such a way that it is not visible when viewing the decoration's obverse. The device shall be pierced on both sides of the body and underneath the scales. (As shown on bottom right image).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:23Z
Check the source to verify that this is the current version before use.

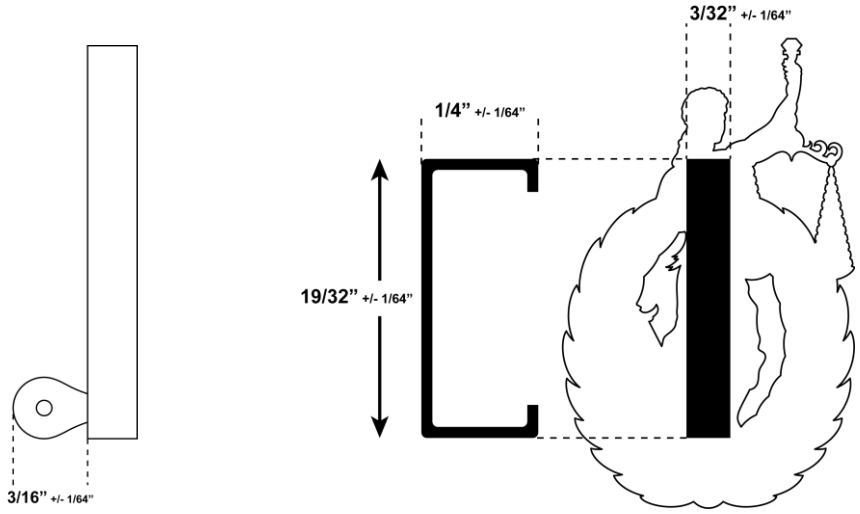

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIP NUMBER	MEDALS
Transparent Blue #NA	COMMUNITY POLICING
Transparent Green #11	FIELD OPERATIONS
Transparent Purple #23	CRIMINAL INVESTAGATIONS

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the ribbon for the neckband, pendant drape and service ribbon is MIL-DTL-11589/685

3. The specification slash sheet for the lapel button is MIL-DTL-11484/393.

4. The specification slash sheet for the ribbon attachment is MIL-DTL- 41819/60

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2017-085)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:23Z
Check the source to verify that this is the current version before use.