INCH-POUND


MIL-DTL-3943/396
14 February 2016

DETAIL SPECIFICATION SHEET

DECORATION, SUPERIOR CIVILIAN SERVICE MEDAL, DEFENSE ADVANCED RESEARCH PROJECTS AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

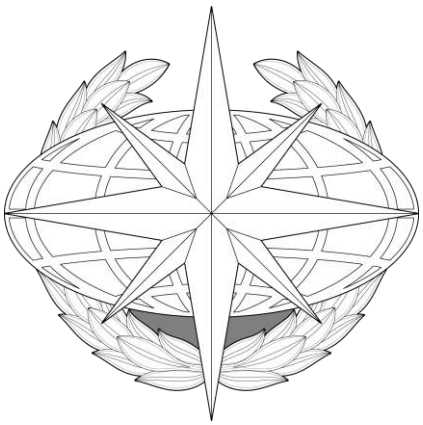

OBVERSE



REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy No. C230)

FINISH: Silver Plated, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry Metal Finish Chip Number 14.

DIMENSIONS:
HEIGHT:
-1: 1-1/12 inches (REF)
-2: 3/4 inch (REF)
WIDTH:
-1: 1-1/2 inches (REF)
-2: 3/4 inch (REF)
THICKNESS:
-1: 0.214 ± 0.010 inch
-2: 0.145 ± 0.010 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:24Z
Check the source to verify that this is the current version before use.

DECORATION SET: The decoration set shall consist of a regular size medal, miniature size medal, service ribbon and lapel button all packaged in a decoration case conforming to MIL-C-14633, Type XV case with a Class 2 pad.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the ribbon, for the pendant drape and for the service ribbon is MIL-DTL-11589/688.

3. The specification slash sheet for the lapel button is MIL-DTL-11484/398.

4. Shaded Areas must be pierced.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2017-143)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:24Z
Check the source to verify that this is the current version before use.