MILITARY SPECIFICATION

SMOCK, GENERAL PURPOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for a white cotton smock.

1.2 Classification. The smock shall be one type in the following sizes (see 6.2):

Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this document to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S. Army Natick Research and Development Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole
UU-P-268	- Paper, Kraft, Wrapping
CCC-C-426	- Cloth, Drill, Cotton
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)

MILITARY

MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular sizes)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this document may appear in the sample, in which case this document shall govern.

3.2 Materials.

3.2.1 Basic material. The basic material shall be white, cotton drill cloth, conforming to types I, II or III, class 3, of CCC-C-426.

3.2.2 Buttons. Knotted buttons shall be of white braided cotton made into tubular tape on a 28 or 32 carrier machine from a 2 ply, 2 cord, No. 20 ticket, bleached cotton yarn, with not less than 3 ends per carrier and not less than 18 picks per inch. The 5/16-inch tape shall weigh 30 ± 1 ounces per gross yard and have a minimum breaking stength of 125 pounds when tested as specified in 4.2.1.1. The button shall be formed by interlacing the braided tape, forming a knotted ball 5/8 ± 1/8 inch in diameter. The tape shall be of sufficient length to allow the two free ends to protrude not less than 1 1/4 inches from the knotted ball.

3.2.3 Gimp. The gimp for reinforcing buttonholes shall be cotton, size 8, white or natural, conforming to type I or II of V-T-280.

3.2.4 Labels. Each smock shall have an identification and a size label, or a combination size and identification label conforming to DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

* 3.2.4.1 Identification label. The identification label shall conform to type VI, class 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

* 3.2.4.2 Size label. The size label shall conform to type VI, class 2.

* 3.2.4.3 Combination label (when applicable). The identification label and size label may be combined into one label conforming to type VI, classes 1 and 2 combined.

* 3.2.5 Thread. The thread shall be cotton, natural white AH, C.A. 66050, type IA2, ticket No. 50, 3 ply and 70, 2 ply, conforming to V-T-276.

3.3 Design. The smock is single breasted, with a notched lapel collar, two breast patch pockets, with pencil pocket within the left breast pocket, two lower patch pockets, and two side hand openings (see figure 1).

3.4 Figure. The figure is furnished for information purposes only. If there are any inconsistencies between the written document and the figure, the document shall control.

3.5 Patterns. Standard patterns, which provide an allowance of 1/2 inch for double-lapped seams and 3/8 inch for all other seams, will be furnished by the Government to the contractor for cutting working patterns. The Government patterns, which show directional lines and markings for proper assembly, shall not be altered in any way and are to be used as a guide for cutting contractor's working patterns. The working patterns shall be identical to the Government patterns.

3.5.1 List of pattern parts. The components of the smock shall be cut from materials as specified and according to the number of parts listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Cotton drill cloth	Front	2
	Bavck	2
	Top collar	1
	Undercollar	2 1/
	Pencil pocket	1
	Top pocket	2
	Lower pocket	2
	Sleeve	2 2/
	Front facing	2

1/ An alternate pattern part for one-piece undercollar is included.

2/ An alternate pattern part for a two-piece sleeve is included.

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam, and stitching types specified in table II are those covered by FED-STD-751. When two or more seams or stitch types are given for the same part of an operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. When stitch type 401 is used, the looper shall be on the inside of the smock. Seams required to be worked out, which have a depth between the fold of 1/16 inch or more, shall be considered a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. The ends of all seams and stitching, produced with 301 stitch type when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than three stitches. Thread breaks, on all stitch types, shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type.

3.6.4 Buttonholes. Buttonholes shall be 7/8 to 1 inch cut length, to fit easily over a 5/8-inch knotted button, eyelet end, taper-bar type, or eyelet end, square-bar type, worked over gimp, with the ends tacked or bartacked. Purling shall be on the outside of the smock. The bar at end shall have a minimum of 4 tacks not counting cross-over stitch, as it is part of buttonhole, not bar.

3.7 Manufacturing operation requirements. The smock shall be made in accordance with the operation requirements specified in table II. The contractor is not required to follow exact sequence of operations listed unless otherwise specified. Any additional basting or holding stitches used to facilitate manufacture are permissible provided the thread does not show on the finished garment.

3.7.1 Marking. The parts of the smock shall be marked to ensure a uniform shade and size throughout the garment. Any method of marking may be used except:

a. Metal fastening devices,
b. Sew-on type tickets, or
c. Adhesive type tickets which leave traces of adhesive on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
1.	Cutting						
	a. Cut the smock in strict accordance with patterns furnished, which show size, shape, placement of pockets, directional lines and notches for the proper assembling of all parts. Directional lines shall be placed in the warp direction.						
	b. Cut all parts from the same piece of material except undercollar, and pencil pocket which may be cut from ends. Parts cut from ends shall approximate the shade of the smock.						
	c. The top collar and undercollar may be cut in the warp or in the filling direction.						
	d. Cut back vents on the selvage.						
	e. The back edge of the facing may be cut on the selvage.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
2.	Replacement of defective components						
		During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.2.2.1 shall be removed from production and replaced with nondefective and properly matched components.					
3.	Marking (see 3.7.1)						
		a. Mark, ticket, or bundle all parts to ensure a uniform shade and proper assembly of smock, except those parts cut from ends.					
4.	Make hand openings						
		a. Hem hand openings on fronts, as indicated by pattern, with the raw edge turned in. The hems shall finish 3/8 to 1/2 inch wide.	301	EFb-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
4.	Make hand openings - Continued					
	b. Slash top and bottom of hand openings on back parts and hem with the raw edge turned in. The hem shall finish 3/8 to 1/2 inch wide.	301	EFb-1	10-14	50-3	50-3
5.	Make four patch pockets and attach identification label (if combination label is not used)					
	Finished appearance: The hems shall finish without twists, raw edges, pleats, or puckers. The top and lower pocket hems shall finish 1 ± 1/8 inches wide.					
	a. Hem pockets, as indicated by notches on pattern, with the raw edge turned in: Catch the identification label in the stitching, centered (1/2 inch off center tolerance) on the inside of the right lower pocket.	301	EFb-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
6.	Hem pencil pocket					
	a. Turn down top of pocket 1/2 ± 1/8 inch and stitch 1/8 to 1/4 inch from raw edge.	301	EFb-1	10-14	50-3	50-3
7.	Sew on pencil pocket					
	a. Turn in side and bottom edges of pocket and stitch to left front of smock as indicated by marks on pattern. The front edge of pencil pocket may have a raw edge if covered by stitching of the left top pocket.	301	LSd-1	10-14	50-3	50-3
	b. Form two divisions with a row of vertical stiching through smock. Each division shall measure 1 ± 1/8 inches when finished.	301	SS-1	10-14	50-3	50-3
8.	Sew on pockets					
	Finished appearance: The pockets shall be uniform in appearance and shall lie flat and smooth, without twists, pleats, puckers, or raw edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
8.	Sew on pockets - Continued						
	a. Position pockets as indicated by marks on pattern. Turn in raw edges and double stitch to smock (3/16- to 1/4-inch gage). The finished width and depth of pockets shall be as follows:		301 or 401	LSd-2 LSd-2	10-14 10-14	50-3 50-3	50-3 70-2

Top pockets	Width (inches)	Depth (inches)	Tolerance (inches)
All sizes	5 5/8	6 1/8	± 1/4

Lower pockets	Width (inches)	Depth (inches)	Tolerance (inches)
Small	7	9	± 1/4
Medium	7 1/4	9	± 1/4
Large	7 1/2	9	± 1/4
X-Large	7 3/4	9	± 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
8.	Sew on pockets - Continued						
	b. Bartack ends of pocket openings with 1/2 ± 1/8 inch vertical bartacks, automatic line tack or back tack 1/2 inch in line with the inside row of pocket stitching.		Bartack or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3
	If pockets are set with 401 stitch type, the bartacks or automatic line tacks shall be positioned horizontally and shall secure the ends of both rows of stitching.						
9.	Make backs						
	a. Join the center back seam from neck to vent notch, with a double-lapped, double-stitched seam, 1/4- to 5/16-inch gage.		301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-3
	b. Tack across the end of the center back seam at top of vent with a 1/2 ± 1/8 inch bartack, or automatic line tack.		Bartack or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
10.	Make hanger						
	a.	Fold strip of basic material in half lengthwise with raw edges turned to the inside and double stitch, 3/16- to 1/4-inch gage.	301	EFp-2	10-14	50-3	50-3
		-or-					
	b.	Fold material lengthwise with edges abutted at center and double stitch, 3/16- to 1/4-inch gage, with the covering stitch on the underside. The hanger shall finish 5/16 to 3/8 inch wide and shall measure 2 to 2 1/2 inches long in the finished smock.	406	EFh-1	10-14	50-3	70-2
11.	Make collar						
	a.	If two-piece construction, join the undercollar pieces and spread joining seam open.	301	SSa-1	10-14	50-3	50-3
	b.	Seam top collar to undercollar, trim, turn, force out edges and points, and single stitch 1/16 to 1/8 inch from edge.	301	SSe-2	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
12.	Sew facings to fronts (when applicable) and finish back edge					
	a. Seam right and left facings to fronts from notch at step, across step, down front and across bottom. Clip seam allowance at lapel notch, turn, force out lapel, bottom points, and edges and single stitch edges 1/16 to 1/8 inch from edge.	301	SSe-2	10-14	50-3	50-3
	b. Stitch back edge of facings to smock, with raw edge turned in, from shoulder to bottom of smock. When facing is cut on selvage, the edge need not be turned in.	301	LSd-1	10-14	50-3	50-3
	NOTE: Back edge of facings may be pre-hemmed when not cut on selvage.	301	EFa-1	10-14	50-3	50-3
13.	Join shoulder seam					
	a. Join shoulder seam with double-lapped, doublestitched seams, 1/4- to 5/16-inch gage. The ends of the facings shall be caught in the seam.	301 or 401	LSc-1 LSc-1	10-14 10-14	50-3 50-3	50-3 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
14.	Set collar and attach size, or combination label (if applicable) Finished appearance: The collar shall finish without pleats, twists, or puckers. The hanger shall be looped with ends inserted in collar joining seams, 3/4 to 1 inch apart. The hanger shall be on top of label.					
	a. Seam bottom edge of undercollar to neck of smock.	301	SSa-1	10-14	50-3	50-3
	b. Turn in the bottom edge of top collar and seam to neck of smock with seam allowances of undercollar turned into collar. Catch size label (or combination label) and hanger in seaming, at center (1/4 inch off-center tolerance) of back.	301	LSb-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
15.	Make and set sleeves						
	Finished appearance: The seams shall start and finish evenly. The sleeve hems shall be 1 ± 1/8 inches wide, uniform in width and without gathers, pleats, twists, or puckers. If sleeve is two-piece construction, the distance from shoulder to back arm seam shall not vary more than 3/4 inch.						
	a. Join front and back sleeve (if two-piece construction) with a double-lapped, double-stitched seam, 1/4- to 5/16-inch gage.		301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
	b. Turn up bottom of sleeve with the raw edges turned in and stitch 1/16 to 1/8 inch from edge.		301	EFb-1	10-14	50-3	50-3
	c. Set sleeves with a double-lapped, double-stitched seam 1/4- to 5/16-inch gage, with body parts over the sleeve.		301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
15.	Make and set sleeves - Continued					
	-or-					
	d. Set sleeve, matching notches, distributing the fullness between the notches, and with the stitching 3/8 to 7/16 inch from edge.	301 or 401	LSq-2(a) LSq-2(a)	10-14 10-14	50-3 50-3	50-3 70-2
	e. Overedge the seam allowances together.	502 or 503	SSa-1 SSa-1	10-14 10-14	70-2 70-2	70-2 70-2
	-or-					
	f. Stitch and overedge the sleeves in one operation	515 or	LSbm-3(a)	10-14	50-3 (chain stitching) 70-2 (overedge stitching)	70-2 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No. Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
15. Make and set sleeves - Continued					
f. (Continued)	516 or 519 or 517 or	LSbm-3(a)	10-14	50-3 50-3 (lock stitching	50-3 50-3
	518			70-2 (overedge stitching)	70-2
g. Turn sleeve and raise stitch armhole on outside with a single row of stitching, 1/4 to 5/16 inch from edge with the seam allowances turned toward body of smock. (This operation is not applicable if optional operation "d" is used.)	301 or 401	LSq-2(b) LSq-2(b) or LSbm-3(b)	10-14 10-14	50-3 50-3	50-3 70-2
16. Join side and underarm seams					
a. Join side and underarm seams with a double-lapped, double-stitched seam, 1/4- to 5/16-inch gage with the fronts on top of backs. The hand openings shall finish not less than 8 inches long and shall not vary in length by more than 1/2 inch. The ends of the seams at wrists and bottom of smock shall be flush.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
16.	Join side and underarm seams - Continued						
	b. Tack across the side seams at top and bottom of hand openings and at wrists with a ± 1/8 inch bartack or automatic line tack.		Bartack or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3
17.	Make buttonhole						
		Mark or gage and make four taper-bar or square-bar type buttonholes on left front of smock, as indicated by marks on pattern, with inside edge of eyelet 3/4 ± 1/8 inch from edge.	Buttonhole		52-54 per buttonhole including tack	50-3	50-3
18.	Hem bottom of smock						
		Finished appearance. The hem shall be uniform in width and shall finish 3/4 ± 1/8 inch wide, without gathers, twists, pleats, or puckers. The front facing shall finish over the hem.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
18.	Hem bottom of smock - Continued					
	a. Turn up bottom smock with raw edge turned in and single stitch 1/16 to 1/8 inch from edge. Bottom may be hemmed before joining side seams, in which case the side seams shall be flush and the end of the seams shall be tacked with a 1/2 ± 1/4 inch bartack or automatic line tack.	301 and Bartack or 301	EFb-1	10-14 28 per bartack 28 per tack	50-3 50-3 50-3	50-3 50-3 50-3
19.	Mark for buttons					
	Mark smock for buttons in locations to correspond with buttonholes. The marks shall be 1 1/4 ± 1/8 inches from front edge.					
20.	Tack on buttons					
	Superimpose ends of button braid and position on marks with button part away from the edge. Bartack ends of braid to smock at button marker; across the width of the braid, 1/4 to 3/8 inch from raw	Bartack		28 per bartack	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operation requirements - Continued

No.	Manufacturing Operations	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or Looper
20.	Tack on buttons - Continued						
		end of braid. Turn button back with the braid covering the raw end and bartack again to the smock, across the width of the braid in the bartack. The finished button shank shall measure 1/4 to 1/2 inch in length from the bottom of the button to bartack of braid.					
21.	Press smock						
		a. Press the smock with a heated pressing iron or steam pressing machine.					
22.	Clean smock						
		a. Trim all thread ends and remove loose threads.					
		b. Remove all spots, stains, and marking tickets.					
		c. Button smock.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished smocks shall conform to the measurements shown in table III. The tolerance for all measurements, except sleeve seams, shall be ± 1 inch. The tolerance for the sleeve seams shall be ± 1/2 inch.

TABLE III. Measurements in inches

	Small	Medium	Large	X-Large
1/2 Chest 1/	22	24	26	28
Sleeve 2/	18	18	18	18
Back length 3/	41.75	43.25	44.75	46.25

1/ With the smock buttoned, measure across chest, at base of armhole, from folded edge to folded edge.

2/ Measure sleeve seam from sleeve setting seam to end of sleeve. If sleeve is set with double-lapped seam, measure seam from the center of sleeve setting seam to the bottom of sleeve.

3/ Measure back length down center of back from collar joining seam to a point in line with bottom of smock.

3.9 Workmanship. The finished smock shall conform to the quality and grade of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inpsections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and material shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document. In addition to testing provisions contained in subsidiary documents, testing shall be performed on components listed in table IV for characteristics noted. All tests are applicable to the sample unit. Wherever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191. When the data in "determinations per sample unit" and "results reported as" columns are not specified in the table, they shall be as required by the referenced test method. All test reports shall contain the individual values used in expressing the final results.

4.2.1.1 Sampling for testing. Unless otherwise specified in subsidiary documents, testing shall be in accordance with the following:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any specified test requirements. The lot size shall be expressed in buttons. The sample unit for testing the buttons (see 3.2.2) shall be 15 buttons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE IV. Test methods

Component	Characteristic	Requirement paragraph	Test Method	No. of determinations per sample unit	Results reported as
Buttons (knotted)	No. of carriers	3.2.2	Visual	1	Pass or fail
	Ends per carrier	3.2.2	Visual	1	Pass or fail
	Picks per inch	3.2.2	5050		
	Breaking strength	3.2.2	5100		
	Weight (ounces) per gross yard	3.2.2	5040		

* 4.2.2 Examination of end item. The end item shall be examined for the defects listed in 4.2.2.1 through 4.2.2.3. The sample unit shall be one smock. The inspection level shall be II, and the acceptable quality level (AQL) shall be 2.5 for major defects and 15.0 for major and minor A defects combined with a maximum of 25.0 total (major, minor A and B combined) defects allowed, expressed in terms of defects per hundred units.

4.2.2.1 General defects.

TABLE V. Classification of general defects

Defect	Classification		
	Major	Minor A	Minor B
Pressing			
a. Burned or scorched	X		
b. Omitted		X	
c. Poorly pressed			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of general defects - Continued

Defect	Classification		
	Major	Minor A	Minor B
Material defects and damages			
a. Hole, cut, tear, or needle chew:			
1. On outside:			
-any	X		
2. On inside:			
- up to 1/8 inch (inclusive)			X
- more than 1/8 inch		X	
b. Mend, darn, or patch:			
1. On outside:			
- any	X		
2. On inside:			
- 1/8 inch up to 1/2 inch (inclusive)			X
- more than 1/2 inch		X	
c. Weakening defects:			
1. Smash	X		
2. Multiple float or loose slub:			
- on outside	X		
- on inside		X	
d. Permanent crease in cloth	X		
e. Slub or shade bar:		X	
- on outside	X		
- on inside		X	
Shaded parts			
Outside part shaded		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of general defects - Continued

Defect	Classification		
	Major	Minor A	Minor B
Cleanness			
a. Spot or stain: - on outside		X	
b. One or more shade tickets not removed			X
c. Any shade marking visible on outside	X		
d. Thread ends not trimmed, or loose threads not removed			X
e. Visible basting thread not removed			X
Component and assembly			
Any component part or required operation omitted (unless otherwise classified herein)	X		
Cutting			
Any component part not cut in conformance with directional lines indicated on patterns or in accordance with document requirements	X		
Seams and stitching			
a. Accuracy of seaming:			
1. Seam or component part twisted, puckered, or pleated (unless otherwise classified herein)	X		
2. Part of material caught in unrelated operation or stitching:			
- up to 1/4 inch of stitching (inclusive)		X	
- more than 1/4 inch stitching	X		
3. Ends of stitching, when not caught in other seams or stitchings, backtacked less than 1/4 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of general defects - Continued

Defect	Classification		
	Major	Minor A	Minor B
Seams and stitching - Continued			
4. Stitching overlapping end(s) of thread break less than 1/2 inch			X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch			X
b. Gage of stitching:			
1. Irregular (i.e., unevenly gaged or corresponding stitching not uniformly gaged) (to be scored only when condition exists along major portion of seam)		X	
2. Not within range of gage specified or varies more than 1/16 inch when no range is specified			X
c. Raw edges: - more than 1/4 inch long			X
d. Seam and stitch type: - seam type or stitch type not as specified			X
e. Stitches per inch (score defect when occurring on the major portion of seam):			
- more than maximum specified			X
- less than minimum specified		X	
f. Stitch tension (except bartacks):			
1. Loose tension resulting in a loose seam	X		
2. Loose tension (exposed loops of top or bottom threads on the surface of the material):			
- 1/4 to 1/2 inch in length (inclusive)			X
- more than 1/2 inch		X	
3. Tight tension (stitching break when strain is applied in the direction of the seam or stitching)		X	

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of general defects - Continued

Defect	Classification		
	Major	Minor A	Minor B
Seams and stitching - Continued			
g. Open seams:			
- up to 1/4 inch inclusive			X
- more than 1/4 inch to 3/4 inch inclusive		X	
- more than 3/4 inch	X		
NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or runoff stitches occur. A double stitched seam is considered open when either side of the seam is open.			
Bartacks			
a. Less than 3/8 or more than 5/8 inch long			X
b. Loose tension on one or more			X
Buttonholes			
a. One or more omitted or added	X		
b. Stitching on one or more buttonholes not caught in fabric, causing stitching to pull away from fabric	X		
c. Cut length less than 7/8 or more than 1 inch long	X		
d. One or more broken or more than two skipped stitches in one or more buttonholes		X	
e. Bar at end having less than 4 stitches (do not count first cross-over stitch as it is part of buttonhole, not the bar)		X	
f. Buttonhole(s) less than 5/8 or more than 7/8 inch from front edge measured from the inside of the eyelet			X

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of general defects - Continued

Defect	Classification		
	Major	Minor A	Minor B
Buttonholes - Continued			
g. Gimp omitted on one or more buttonholes			X
h. Finished with purling on inside		X	
i. Ragged edges			X
j. Uncut or not specified type		X	
Buttons			
a. Missing, insecure, or defective: - one or more buttons		X	X
b. Not attached as specified		X	
c. Shank, including tacked portion, less than 1/4 inch or more than 1/2 inch long		X	
d. Attached with less than two bartacks		X	
e. Raw edge not covered in second bartacking		X	
f. Bartacking not extending across the width of braid		X	

* 4.2.2.2 Detailed defects applicable to specific parts.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of specific defects

Defect	Classification		
	Major	Minor A	Minor B
Labels (identification and size label)			
a. Identification			
1. Missing, incorrect, or illegible		X	
2. Insecurely caught in stitching of hem of right side pocket			X
3. Positioned other than in right side pocket			X
b. Size (or combination) label:			
1. Missing, incorrect, or illegible		X	
2. Not securely caught in joining seam of collar			X
3. Off-center with center back seam by more than 1 inch or not positioned at center of neck			X
Collar and hanger loop			
a. Top collar twisted, puckered, full, or tight, causing edges to curl		X	
b. Off center by more than 1/2 inch			X
c. Top collar or undercollar tight at joining to neck, causing puckers or pleats on fronts or back		X	
d. Undercollar seam, if two piece construction, not spread open			X
e. Points poorly shaped or not uniformly shaped		X	
f. Points uneven in length by more than 1/4 inch		X	
g. Undercollar exposed beyond edge of top collar			X
h. Edge not forced out			X
i. Undercollar center seam, if two-piece construction, more than 1/2 inch from center of back seam			X
j. Hanger loop omitted or ends not securely caught in collar setting seam		X	
k. Hanger loop off-center by more than 1 inch			X
l. Hanger loop ends less than 3/4 or more than 1 inch apart			X

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of specific defects - Continued

Defect	Classification		
	Major	Minor A	Minor B
Collar and hanger loop - Continued			
m. Hanger loop less than 5/16 or more than 3/8 inch wide or less than 2 or more than 2 1/2 inches long			X
Lapels			
a. Poorly shaped or not uniformly shaped		X	
b. Twisted or ends curled		X	
c. Corner(s) or edge(s) not forced out			X
d. Front exposed along edge(s)			X
e. Lapel steps uneven in length by more than 3/8 inch		X	
Fronts			
a. Right and left front uneven in length when smock is buttoned:			
- 3/8 to 3/4 inch (inclusive)			X
- more than 3/4 inch (inclusive)		X	
b. Right and left front uneven in length when the right front and left front are superimposed:			
- more than 1/2 inch but not more than 1 inch		X	
- more than 1 inch	X		
c. Front edge(s) stretched, irregular, curved out at bottom corner(s), or not forced out		X	
d. Bottom corner(s) not forced out			X
e. Facing exposed on left front			X
f. Excessive fullness or twist on front(s) or facings below lapel			X
g. Button(s) and buttonhole(s) not aligned, causing noticeable bulge or twist		X	
h. Top of front facing(s) not caught in collar or shoulder seams		X	
i. Bottom of front facing(s) not finished on top of bottom hem			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of specific defects - Continued

Defect	Classification		
	Major	Minor	
Pockets and hand openings:		A	B
a. Top pockets, lower pockets, or hand openings out of horizontal alignment by more than 3/4 inch		X	
b. Pocket(s) or hand opening(s) excessively full or tight at opening		X	
c. Width of pocket hem:			
- top and lower pocket(s) less than 7/8 inch or more than 1 1/8 inches			X
- pencil pocket less than 3/8 or more than 5/8 inch			X
d. Size of finished top pocket(s):			
- less than 5 3/8 or more than 5 7/8 inches wide			X
- less than 5 7/8 or more than 6 3/8 inches deep			X
e. Size of finished lower pocket(s):			
- small, less than 6 3/4 or more than 7 1/4 inches wide			X
- medium, less than 7 or more than 7 1/2 inches wide			X
- large, less than 7 1/4 or more than 7 3/4 inches wide			X
- extra-large, less than 7 1/2 or more than 8 inches wide			X
- all sizes, less than 8 3/4 or more than 9 1/4 inches deep			X
f. Width of pencil divisions of pencil pocket less than 7/8 or more than 1 1/8 inches wide			X
g. Pencil pocket not positioned within left top pocket		X	
h. Pencil pocket exposed beyond edges of top pocket		X	
i. Ends of patch pocket opening(s) not bartacked, or tacked, in line with inside row of pocket stitching when pocket is set with 301 stitch type		X	
j. Ends of patch pocket opening(s) not bartacked, or tacked, across both rows of stitching when pocket is set with 401 stitch type		X	
k. One or more bartacks, or tacks, omitted at ends(s) of pocket opening(s) when pocket is set with 401 stitch type	X		
l. Width of hand opening hem(s) less than 3/8 or more than 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of specific defects - Continued

Defect	Classification		
	Major	Minor	
		A	B
Pockets and hand openings - Continued			
m. Hand opening(s) less than 3 inches long		X	
n. Hand opening(s) varying in length by more than 1/2 inch		X	
o. Bartacks at top and bottom of hand opening(s) not across side seams			X
p. One or more bartacks, or tacks, omitted at top or bottom of hand opening(s)	X		
Back and bottom hem			
a. Left and right sides of vent uneven in length by more than 1/2 inch			X
b. Bartack, or tack, at end of back seam (top of vent) omitted or not across both rows of stitching	X		
c. Bottom hem less than 5/8 or more than 7/8 inch wide			X
d. Bottom hem twisted		X	
e. Bottom hem not uniform in width by more than 1/4 inch			X
f. Bartack, or tack, omitted at end of side seam(s) when hem is made before side seams are joined	X		
g. End of side seam(s) uneven by more than 1/4 inch when hem is made before side seams are joined		X	
Sleeves			
a. Back seam of sleeve(s) if two-piece construction, an unequal distance from shoulder seam by more than 3/4 inch			X
b. End of underarm seam(s) not even by more than 1/8 inch			X
c. Sleeve hem(s) twisted		X	
d. Sleeve hem less than 7/8 inch or more than 1 1/8 inches wide			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of specific defects - Continued

Defect	Classification		
	Major	Minor A	Minor B
Sleeves - Continued			
e. Sleeve hems not uniform in width by more than 1/4 inch			X
f. Bartack, or tack, at end of underarm seam at wrist not across both rows of stitching		X	
g. Bartack, or tack, omitted at end of underarm seam(s) at wrist	X		
Direction of seams			
a. Back lapped on fronts at side seam(s)		X	
b. Sleeves lapped on fronts at armhole(s)			X
c. Seam allowances not turned toward body of smock at armhole(s) when sleeve is set with LSbm-3 seam type		X	

4.2.2.3 Size measurements. Any measurement deviating from dimensions and tolerances specified in table III shall be scored as a size measurement defect. Sleeve inseams uneven in length by more than 1/2 inch shall be scored as a size measurement defect. The sample unit shall be one smock. The inspection level shall be S-3, and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.2.3 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list in table VII. The lot size shall be the number of shipping containers in the inspection lot. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2, and the AQL shall be 2.5, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE VII. Packaging inspection

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling Bulged or distorted container
Content	Number of bundles per shipping container is more or less than required Number of smocks per bundle is more or less than required 1/ Size shown on one or more smocks not as specified on outer container 1/

1/ For this defect, one bundle from each container in the sample shall be examined.

* 4.2.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with table VIII. The lot size shall be the number of palletized unit loads in the inspection lot. The sample unit shall be one palletized unit load fully packaged. The inspection level shall be S-1, and the AQL shall be 6.5, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE VIII. Palletization examination

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements
Palletization	Pallet not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; or of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each smock shall be neatly folded to approximately 14 1/2 by 11 1/2 inches. Five folded smocks of one size only, each alternated end for end, shall be evenly stacked in a bundle. Each bundle shall be securely tied at each end with cotton tape or twine.

* 5.1.2 Commercial. Smocks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Thirty smocks of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 3A or MIL-B-17757. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A unit packs shall be packed

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

flat two in length, one in width, and three in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the shipping container.

5.2.2 Level B packing. Thirty smocks, of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The inside of each shippping container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level A unit packs shall be packed flat two in length, one in width, and three in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B, of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of MIL-B-17757.

* 5.2.3 Commercial packing. Smocks, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), smocks packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size that does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

5.4.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN's" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The smock is intended for wear by laboratory personnel of the Department of Defense.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B shipment (see 5.2.2.1).
e. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids (see 3.1).

6.4 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue have been made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0463

Source: https://assist.dla.mil -- Downloaded: 202640-16T14:24Z
Check the source to verify that this is the current version before use.

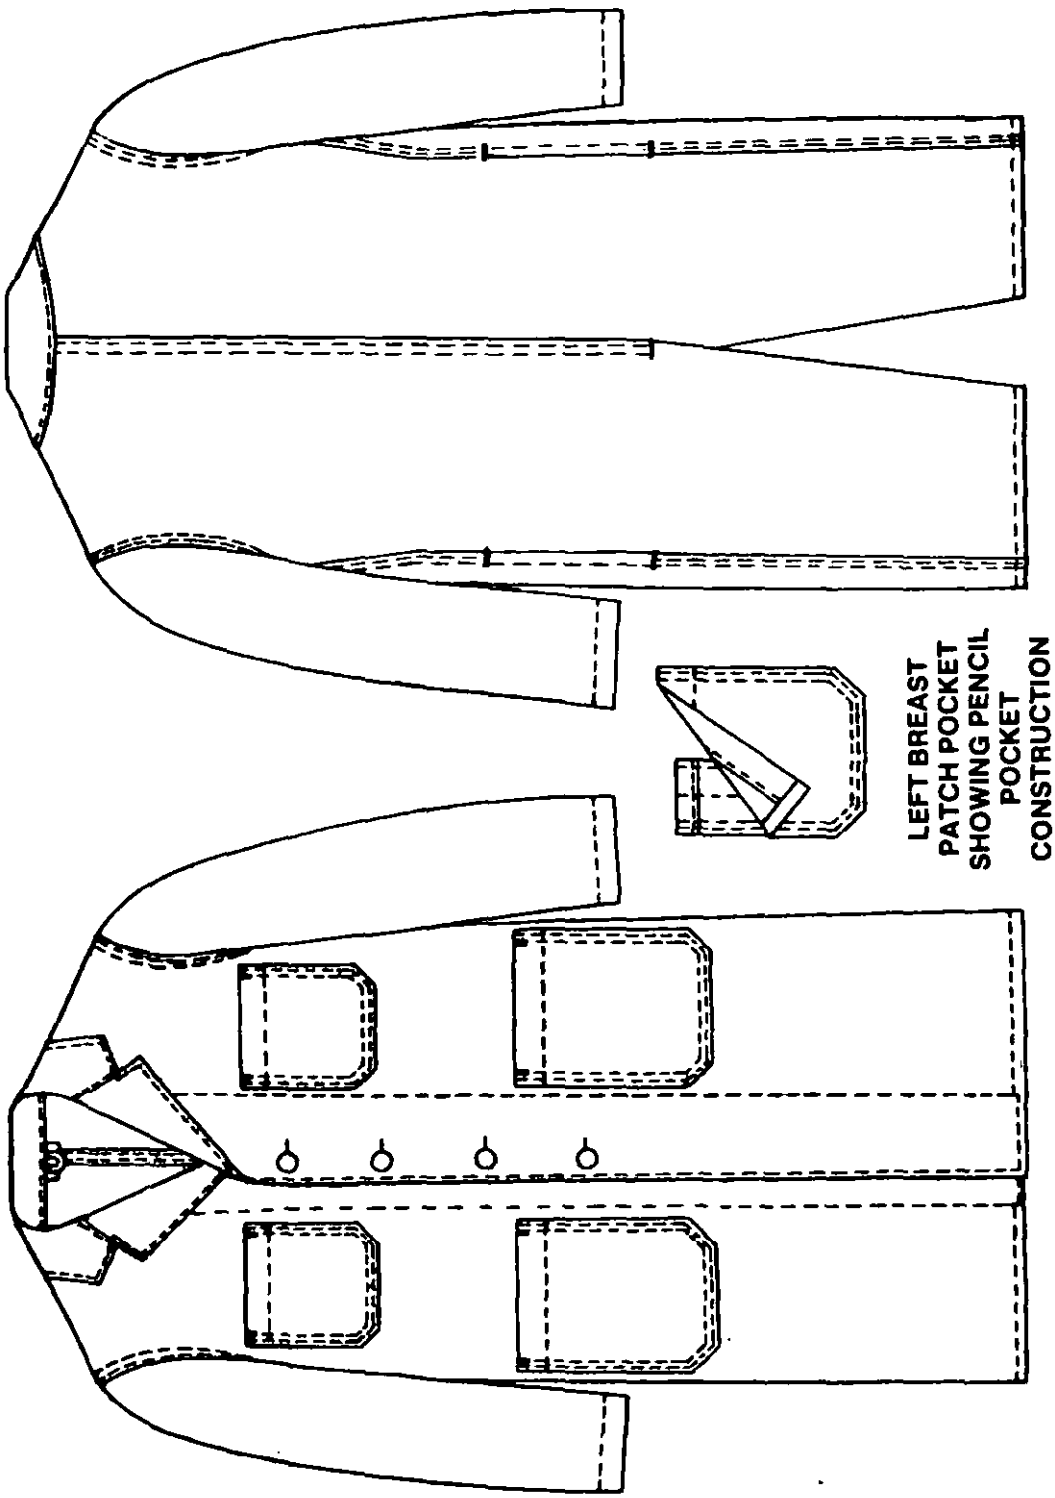


Figure 1. Smock, General Purpose

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-2124J	SMOCK, GENERAL PURPOSE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 82 MAR — PREVIOUS EDITION IS OBSOLETE

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.