INCH-POUND

MIL-S-2124K
23 August 1989
SUPERSEDING
MIL-S-2124J
31 December 1985

MILITARY SPECIFICATION

SMOCK, GENERAL PURPOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers one type of general purpose white cotton smock.

1.2 Classification. The smock shall be of the following sizes as specified (see 6.2).

Small Medium Large X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
V-T-276	-	Thread, Cotton
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
CCC-C-426	-	Cloth, Drill, Cotton
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Shades for Sewing Threads

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.2) in accordance with 4.3.

3.2 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this document may appear in the sample, in which case this document shall govern.

3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be white, cotton drill cloth, conforming to types I, II, or III, class 3 of CCC-C-426.

3.3.2 Buttons. Knotted buttons shall be of white braided cotton made into tubular tape on a 28 or 32 carrier machine from a 2 ply, 2 cord, No. 20 ticket, bleached cotton yarn, with not less than 3 ends per carrier and not less than 18 picks per inch. The 5/16 inch tape shall weigh 30 $\pm$ 1 ounces per gross yard and have a minimum breaking strength of 125 pounds when tested as

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

specified in 4.4.1.1. The button shall be formed by interlacing the braided tape, forming a knotted ball 5/8 ± 1/8 inch in diameter. The tape shall be of sufficient length to allow the two free ends to protrude not less than 1 1/4 inches from the knotted ball.

3.3.3 Gimp. The gimp for reinforcing buttonholes shall be cotton, size 8, white or natural, conforming to type I or II of V-T-280.

3.3.4 Labels. Each smock shall have an identification and a size label, or a combination size and identification label conforming to DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.4.1 Identification label. The identification label shall conform to type VI, class 1.

3.3.4.2 Size label. The size label shall conform to type VI, class 2.

3.3.4.3 Combination label (when applicable). The identification label and size label may be combined into one label conforming to type VI, classes 1 and 2 combined.

3.3.5 Thread. The thread shall be cotton, natural white AS, C.A. 66050, type IA2, ticket No. 50, 3 ply and 70, 2 ply, conforming to V-T-276.

3.4 Design. The smock is single breasted, with a notched lapel collar, two breast patch pockets, with pencil pocket within the left breast pocket, two lower patch pockets, and two side hand openings (see figure 1).

3.5 Figure. The figure is furnished for information purposes only. If there are any inconsistencies between the written specification and the figure, the specification shall control.

3.6 Patterns. Standard patterns, which provide an allowance of 1/2 inch for double-lapped seams and 3/8 inch for all other seams, will be furnished by the Government to the contractor for cutting working patterns. The Government patterns, which show directional lines and markings for proper assembly, shall not be altered in any way and are to be used as a guide for cutting contractor's working patterns. The working patterns shall be identical to the Government patterns.

3.6.1 List of pattern parts. The components of the smock shall be cut from materials as specified and according to the number of parts listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Cotton drill cloth	Front	2
	Back	2
	Top collar	1
	Undercollar	2 1/
	Pencil pocket	1
	Top pocket	2
	Lower pocket	2
	Sleeve	2 2/
	Front facing	2

1/ An alternate pattern part for one-piece undercollar is included.

2/ An alternate pattern part for a two-piece sleeve is included.

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitches, seams, and stitching types specified in table II are those covered by FED-STD-751. When two or more seams or stitch types are given for the same part of an operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. When stitch type 401 is used, the looper shall be on the inside of the smock. Seams required to be worked out, which have a depth between the fold of 1/16 inch or more, shall be considered a defect.

3.7.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.7.3 Thread breaks and ends of seams. The ends of all seams and stitching, produced with 301 stitch type when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than three stitches. Thread breaks, on all stitch types, shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

3.7.4 Buttonholes. Buttonholes shall be 7/8 to 1 inch cut length, to fit easily over a 5/8-inch knotted button, eyelet end, taper-bar type, or eyelet end, square-bar type, worked over gimp, with the ends tacked or bartacked. Purling shall be on the outside of the smock. The bar at end shall have a minimum of 4 tacks not counting cross-over stitch, as it is part of buttonhole, not bar.

3.7.5 Bartacks. The bartacks shall measure 1/2 ± 1/8 inch in length and be free from thread breaks and loose stitching.

3.8 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government finished shaper pattern is furnished, the component shall conform to that pattern.

3.9 Manufacturing operation requirements. The smock shall be made in accordance with the operation requirements specified in table II. The contractor is not required to follow exact sequence of operations listed unless otherwise specified. Any additional basting or holding stitches used to facilitate manufacture are permissible provided the thread does not show on the finished garment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the smock in strict accordance with patterns furnished, which show size, shape, placement of pockets, directional lines and notches for the proper assembling of all parts. Directional lines shall be placed in the warp direction. b. Cut all parts from the same piece of material except undercollar, and pencil pocket which may be cut from ends. Parts cut from ends shall approximate the shade of the smock. c. The top collar and undercollar may be cut in the warp or in the filling direction. d. When operation 9.c. is used, cut back vent seam on the selvage. e. The back edge of the facing may be cut on the selvage.						
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in table V shall be removed from production and replaced with nondefective and properly matched components.						

Source: https://assist.dla.mil - Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. Mark, ticket, or bundle all parts to ensure a uniform shade, size and proper assembly of smock, except those parts cut from ends. Any method of marking may be used except: a. Metal fastening devices. b. Sew-on type markings. c. Adhesive type tickets which leave traces of adhesive on the material upon removal of the tickets.						
4.	Make hand openings. a. Hem hand openings on fronts, as indicated by pattern, with the raw edge turned in. The hems shall finish 3/8 to 1/2 inch wide.	301	EFb-1	10-14	50-3	50-3	
	b. Slash top and bottom of hand openings on back parts and hem with the raw edge turned in. The hem shall finish 3/8 to 1/2 inch wide.	301	EFb-1	10-14	50-3	50-3	
5.	Make four patch pockets and attach identification label (if combination label is not used). Finished appearance: The hems shall finish without twists, raw edges, pleats, or puckers. The top and lower pocket hems shall finish 1 ± 1/8 inches wide.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make four patch pockets and attach identification label (if combination label is not used). (cont'd)						
	Hem pockets, as indicated by notches on pattern, with the raw edge turned in. Catch the identification label in the stitching, centered (1/2 inch off center tolerance) on the inside of the right lower pocket.	301	EFb-1	10-14	50-3	50-3	
6.	Hem pencil pocket.						
	Turn down top of pocket 1/2 ± 1/8 inch and stitch 1/8 to 1/4 inch from raw edge.	301	EFb-1	10-14	50-3	50-3	
7.	Sew on pencil pocket.						
	a. Turn in side and bottom edges of pocket and stitch to left front of smock as indicated by marks on pattern. The front edge of pencil pocket may have a raw edge if covered by stitching of the left top pocket.	301	LSd-1	10-14	50-3	50-3	
	b. Form two divisions with a row of vertical stitching through smock. Each division shall measure 1 ± 1/8 inches when finished.	301	SS-1	10-14	50-3	50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Sew on pockets.						
	Finished appearance: The pockets shall be uniform in appearance and shall lie flat and smooth, without twists, pleats, puckers, or raw edges.						
	a. Position pockets as indicated by marks on pattern. Turn in raw edges and double stitch to smock (3/16 to 1/4 inch gage). The finished width and depth of pockets shall be as follows:	301 or 401	LSd-2 LSd-2	10-14 10-14	50-3 50-3	50-3 70-2	
	Top pockets — Width (inches) — Depth (inches) — Tolerance (inches) All sizes — 5-5/8 — 6-1/8 — ± 1/4						
	Lower pockets — Width (inches) — Depth (inches) — Tolerance (inches) Small — 7 — 9 — ± 1/4 Medium — 7-1/4 — 9 — ± 1/4 Large — 7-1/2 — 9 — ± 1/4 X-Large — 7-3/4 — 9 — ± 1/4						
	b. Bartack ends of pocket openings with vertical bartacks, automatic line tack or back tack 1/2 inch in line with the inside row of pocket stitching.	Bartack or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3	
	NOTE: If pockets are set with stitch type 401, the bartacks or automatic line tacks shall be positioned horizontally and shall secure the ends of both rows of stitching.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make backs.						
	a. Join the center back seam from neck to vent notch, with a double-lapped, double-stitched seam, 1/4 to 5/16 inch gage.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-3	
	b. Tack across the end of the center back seam at top of vent with a bartack, or automatic line tack.	Bartack or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3	
	c. Notch the top of back opening vent so seam will lay open to both sides when back vent seam is cut on the selvage or when it is overedged.						
	d. When back vent seam is not cut on the selvage or overedged, the seam shall be notched, seam allowance turned in with raw edges turned under, and stitched in place.	301	EFb-1	10-14	50-3	50-3	
10.	Make hanger.						
	a. Fold strip of basic material in half lengthwise with raw edges turned to the inside and double-stitch, 3/16 to 1/4 inch gage.	301	EFp-2	10-14	50-3	50-3	
	or						
	b. Fold material lengthwise with edges abutted at center and double-stitch, 3/16 to 1/4 inch gage, with the covering	406	EFh-1	10-14	50-3	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make hanger. (cont'd)						
	stitch on the underside. The hanger shall finish 5/16 to 3/8 inch wide and shall measure 2 to 2-1/2 inches long in the finished smock.						
11.	Make collar.						
	a. If two-piece construction, join the undercollar pieces and spread joining seam open.	301	SSa-1	10-14	50-3	50-3	
	b. Seam top collar to undercollar, trim, turn, force out edges and points, and single stitch 1/16 to 1/8 inch from edge.	301	SSe-2	10-14	50-3	50-3	
12.	Sew facings to fronts (when applicable) and finish back edge.						
	a. Seam right and left facings to fronts from notch at step, across step, down front and across bottom. Clip seam allowance at lapel notch, turn, force out lapel, bottom points, and edges and single stitch edges 1/16 to 1/8 inch from edge.	301	SSe-2	10-14	50-3	50-3	
	b. Stitch back edge of facings to smock, with raw edge turned in, from shoulder to bottom of smock. When facing is cut on selvage, the edge need not be turned in.	301	LSd-1	10-14	50-3	50-3	
	NOTE: Back edge of facings may be pre-hemmed when not cut on selvage.	301	EFa-1	10-14	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Join shoulder seam.						
	a. Join shoulder seam with double-lapped, double-stitched seams, 1/4 to 5/16 inch gage. The ends of the facings shall be caught in the seam.	301 or 401	LSc-1 LSc-1	10-14 10-14	50-3 50-3	50-3 70-2	
14.	Set collar and attach size, or combination label (if applicable).						
	Finished appearance: The collar shall finish without pleats, twists, or puckers. The hanger shall be looped with ends inserted in collar joining seams, 3/4 to 1 inch apart. The hanger shall be on top of label.						
	a. Seam bottom edge of undercollar to neck of smock.	301	SSa-1	10-14	50-3	50-3	
	b. Turn in the bottom edge of top collar and seam to neck of smock with seam allowances of undercollar turned into collar. Catch size label (or combination label) and hanger in seaming, at center (1/4 inch off-center tolerance) of back.	301	LSb-1	10-14	50-3	50-3	
15.	Make and set sleeves.						
	Finished appearance: The seams shall start and finish evenly. The sleeve hems shall be 1 $\pm$ 1/8 inches wide, uniform in width and without gathers, pleats,						

Source: https://assist.dla.mil - Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make and set sleeves. (cont'd)						
	twists, or puckers. If sleeve is two-piece construction, the distance from shoulder to back arm seam shall not vary more than 3/4 inch.						
	a. Join front and back sleeve (if two-piece construction) with a double-lapped, double-stitched seam, 1/4 to 5/16 inch gage.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2	
	b. Turn up bottom of sleeve with the raw edges turned in and stitch 1/16 to 1/8 inch from edge.	301	EFb-1	10-14	50-3	50-3	
	c. Set sleeves with a double-lapped, double-stitched seam 1/4 to 5/16 inch gage, with body parts over the sleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2	
	or						
	d. Set sleeve, matching notches, distributing the fullness between the notches, and with the stitching 3/8 to 7/16 inch from edge.	301 or 401	LSq-2(a) LSq-2(a)	10-14 10-14	50-3 50-3	50-3 70-2	
	e. Overedge the seam allowances together.	502 or 503	SSa-1 SSa-1	10-14 10-14	70-2 70-2	70-2 70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make and set sleeves. (cont'd)						
	or						
	f. Stitch and overedge the sleeves in one operation	515 or	LSbm3(a)	10-14	50-3 (chain stitching)	70-2	
					70-2 (overedge stitching)	70-2	
		516 or	LSbm-3(a)	10-14	50-3	50-3	
		519 or			50-3	50-3	
		517 or			(lock stitching		
		518			70-2 (overedge stitching)	70-2	
	g. Turn sleeve and raise stitch armhole on outside with a single row of stitching, 1/4 to 5/16 inch from edge with the seam allowances turned toward body of smock. (This operation is not applicable if optional operation "d" is used.)	301 or	LSq-2(b)	10-14	50-3	50-3	
		401	LSq-2(b) or LSbm-3(b)	10-14	50-3	70-2	
16.	Join side and underarm seams.						
	a. Join side and underarm seams with a double-lapped, double-stitched seam, 1/4 to 5/16 inch gage with the fronts	301 or	LSc-2	10-14	50-3	50-3	
		401	LSc-2	10-14	50-3	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Join side and underarm seams. (cont'd)						
	on top of backs. The hand openings shall finish not less than 8 inches long and shall not vary in length by more than 1/2 inch. The ends of the seams at wrists and bottom of smock shall be flush.						
	b. Tack across the side seams at top and bottom of hand openings and at wrists with a bartack or automatic line tack.	Bartack or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3	
17.	Make buttonhole.						
	Mark or gage and make four taper-bar or square-bar type buttonholes on left front of smock, as indicated by marks on pattern, with inside edge of eyelet 3/4 ± 1/8 inch from edge.	Buttonhole		52-54 per buttonhole including tack	50-3	50-3	
18.	Hem bottom of smock.						
	Finished appearance. The hem shall be uniform in width and shall finish 3/4 ± 1/8 inch wide, without gathers, twists, pleats, or puckers. The front facing shall finish over the hem.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Hem bottom of smock. (cont'd)						
	a. Turn up bottom smock with raw edge turned in and single stitch 1/16 to 1/8 inch from edge, making sure back vent seams are turned to the inside or hemmed. Bottom may be hemmed before joining side seams, in which case the side seams shall be flush and the end of the seams shall be tacked with a bartack or automatic line tack.	301 and Bartack or 301	EFb-1	10-14 28 per bartack 28 per tack	50-3 50-3 50-3	50-3 50-3 50-3	
19.	Mark for buttons.						
	Mark smock for buttons in locations to correspond with buttonholes. The marks shall be 1-1/4 ± 1/8 inches from front edge.						
20.	Tack on buttons.						
	Superimpose ends of button braid and position on marks with button part away from the edge. Bartack ends of braid to smock at button marker; across the width of the braid, 1/4 to 3/8 inch from raw end of braid. Turn button back with the braid covering the raw end and bartack again to the smock, across the width of the braid in the bartack. The finished button shank shall measure 1/4 to 1/2 inch in length from the bottom of the button to bartack of braid.	Bartack		28 per bartack	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Press smock. Press the smock with a heated pressing iron or steam pressing machine.						
22.	Clean smock. a. Trim all thread ends and remove loose threads. b. Remove all spots, stains, and marking tickets. c. Button smock.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The finished measurements of the smocks shall conform to the requirements shown in table III. The tolerance for all measurements, except sleeve seams, shall be ± 1 inch. The tolerance for the sleeve seams shall be ± 1/2 inch.

TABLE III. Measurements (inches)

	Sizes			
	Small	Medium	Large	X-Large
1/2 Chest 1/	22	24	26	28
Sleeve 2/	18	18	18	18
Back length 3/	41-3/4	43-1/4	44-3/4	46-1/4

1/ With the smock buttoned, measure across chest, at base of armhole, from folded edge to folded edge.

2/ Measure sleeve seam from sleeve setting seam to end of sleeve. If sleeve is set with double-lapped seam, measure seam from the center of sleeve setting seam to the bottom of sleeve.

3/ Measure back length down center of back from collar joining seam to a point in line with bottom of smock.

3.11 Workmanship. The finished smock shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in table V and the dimensions specified in 3.10, plus any variation in sleeve length of more than 1/2 inch.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.1.1 Knotted button testing. In addition to testing provisions contained in subsidiary documents, testing shall be performed on the knotted buttons as required by table IV for the characteristics noted. All tests are applicable to the sample unit. Wherever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191. When the data in "determinations per sample unit" and "results reported as" columns are not specified in the table, they shall be as required by the referenced test method. All test reports shall contain the individual values used in

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

expressing the final results. The lot shall be unacceptable if one or more sample units fail to meet any specified test requirements. The lot size shall be expressed in buttons. The sample unit for testing the buttons (see 3.3.2) shall be 15 buttons.

4.4.1.2 Sampling for testing. Unless otherwise specified in subsidiary documents, testing shall be in accordance with the following:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

TABLE IV. Test methods

Component	Characteristic	Requirement paragraph	Test method	No. of determinations per sample unit	Results reported as
Buttons (knotted)	No. of carriers	3.3.2	Visual	1	Pass or fail
	Ends per carrier	3.3.2	Visual	1	Pass or fail
	Picks per inch	3.3.2	5050		
	Breaking strength	3.3.2	5100		
	Weight (ounces) per gross yard	3.3.2	5040		

4.4.2 End item visual examination. The end items shall be examined for the defects listed below. The lot size shall be expressed in units of smocks. The sample unit shall be one smock. The inspection level shall be II (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects

Examine	Defect	Classification		
		Major	Minor A	Minor B
General defects:				
Pressing	Burned or scorched	101		
	Omitted		201	
	Poorly pressed			301
Material defects and damages	Hole, cut, tear, or needle chew:			
	On outside:			
	-any	102		
	On inside:			
	-up to 1/8 inch inclusive			302
	-more than 1/8 inch		202	
	Mend, darn, or patch:			
	On outside:			
	-any	103		
	On inside:			
	-1/8 up to 1/2 inch inclusive			303
	-more than 1/2 inch		203	
	Weakening defects:			
	Smash	104		
	Multiple float or loose slub:			
	-on outside	105		
	-on inside		204	
	Permanent crease in cloth	106		
	Slub or shade bar:			
	-on outside	107		
	-on inside		205	
Shaded parts	Outside part shaded		206	
Cleanness	Spot or stain on outside		207	
	One or more shade tickets not removed			304
	Any shade marking visible on outside	108		
	Thread ends not trimmed, or loose threads not removed			305
	Visible basting thread not removed			306
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	109		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
General defects:				
Cutting	Any component part not cut in conformance with directional lines indicated on patterns or in accordance with document requirements	110		
Seams and stitching	Accuracy of seaming:			
	Seam or component part twisted, puckered, or pleated (unless otherwise classified herein)	111		
	Part of material caught in unrelated operation or stitching:			
	-up to 1/4 inch of stitching inclusive		208	
	-more than 1/4 inch stitching	112		
	Ends of stitching, when not caught in other seams or stitchings, backtacked less than 1/4 inch		209	
	Stitching overlapping end(s) of thread break less than 1/2 inch			307
	Ends of a continuous line of stitching overlapped less than 1/2 inch			308
	Gage of stitching:			
	Irregular (i.e., unevenly gaged or corresponding stitching not uniformly gaged) (to be scored only when condition exists along major portion of seam)		210	
	Not within range of gage specified or varies more than 1/16 inch when no range is specified			309
	Raw edges more than 1/4 inch long			310
	Seam type or stitch type not as specified			311
	Stitches per inch (score defect when occurring on the major portion of seam):			
	-more than maximum specified			312
	-less than minimum specified		211	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
General defects:				
Seams and stitching (cont'd)	Stitch tension (except bartacks):			
	Loose tension resulting in a loose seam	113		
	Loose tension (exposed loops of top or bottom threads on the surface of the material):			
	-1/4 to 1/2 inch in length inclusive			313
	-more than 1/2 inch in length		212	
	Tight tension (stitching break when strain is applied in the direction of the seam or stitching)		213	
	Open seams:			
	-up to 1/4 inch inclusive			314
	-more than 1/4 up to 3/4 inch inclusive		214	
	-more than 3/4 inch	114		
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or runoff stitches occur. A double stitched seam is considered open when either side of the seam is open.			
Bartacks	Less than 3/8 or more than 5/8 inch long			315
	Loose tension on one or more			316
Buttonholes	One or more omitted or added	115		
	Stitching on one or more buttonholes not caught in fabric, causing stitching to pull away from fabric	116		
	Cut length less than 7/8 or more than 1 inch long	117		
	One or more broken or more than two skipped stitches in one or more buttonholes		215	
	Bar at end having less than 4 stitches (do not count first cross-over stitch as it is part of buttonhole, not the bar)		216	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
General defects:				
Seams and stitching (cont'd)	Buttonhole(s) less than 5/8 or more than 7/8 inch from front edge measured from the inside of the eyelet			317
	Gimp omitted on one or more buttonholes			318
	Finished with purling on inside		217	
	Ragged edges			319
	Uncut or not specified type		218	
Buttons	Missing, insecure, or defective: -one or more buttons		219	
	Not attached as specified		220	
	Shank, including tacked portion, less than 1/4 inch or more than 1/2 inch long		221	
	Attached with less than two bartacks		222	
	Raw edge not covered in second bartacking		223	
	Bartacking not extending across the width of braid		224	
Detailed defects:				
Labels (identification and size label)	Identification label: Missing, incorrect, or illegible		225	
	Insecurely caught in stitching of hem of right side pocket			320
	Positioned other than in right side pocket			321
	Size (or combination) label: Missing, incorrect, or illegible		226	
	Not securely caught in joining seam of collar			322
	Off-center with center back seam by more than 1 inch or not positioned at center of neck			323

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
Detailed defects (cont'd):				
Collar and hanger loop	Top collar twisted, puckered, full, or tight, causing edges to curl	227		
	Off center by more than 1/2 inch			324
	Top collar or undercollar tight at joining to neck, causing puckers or pleats on fronts or back	228		
	Undercollar seam, if two piece construction, not spread open			325
	Points poorly shaped or not uniformly shaped	229		
	Points uneven in length by more than 1/4 inch	230		
	Undercollar exposed beyond edge of top collar			326
	Edge not forced out			327
	Undercollar center seam, if two-piece construction, more than 1/2 inch from center of back seam			328
	Hanger loop omitted or ends not securely caught in collar setting seam	231		
	Hanger loop off-center by more than 1 inch			329
	Hanger loop ends less than 3/4 or more than 1 inch apart			330
	Hanger loop less than 5/16 or more than 3/8 inch wide or less than 2 or more than 2-1/2 inches long			331
Lapels	Poorly shaped or not uniformly shaped	232		
	Twisted or ends curled	233		
	Corner(s) or edge(s) not forced out			332
	Front exposed along edge(s)			333
	Lapel steps uneven in length by more than 3/8 inch	234		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
Detailed defects (cont'd):				
Fronts	Right and left front uneven in length when smock is buttoned:			
	-3/8 to 3/4 inch inclusive			334
	-more than 3/4 inch		235	
	Right and left front uneven in length when the right front and left front are superimposed:			
	-more than 1/2 but not more than 1 inch inclusive		236	
	-more than 1 inch	118		
	Front edge(s) stretched, irregular, curved out at bottom corner(s), or not forced out		237	
	Bottom corner(s) not forced out			335
	Facing exposed on left front			336
	Excessive fullness or twist on front(s) or facings below lapel			337
	Button(s) and buttonhole(s) not aligned, causing noticeable bulge or twist		238	
	Top of front facing(s) not caught in collar or shoulder seams		239	
	Bottom of front facing(s) not finished on top of bottom hem			338
Pockets and hand openings:	Top pockets, lower pockets, or hand openings out of horizontal alignment by more than 3/4 inch		240	
	Pocket(s) or hand opening(s) excessively full or tight at opening		241	
	Width of pocket hem:			
	-top and lower pocket(s) less than 7/8 or more than 1-1/8 inches			339
	-pencil pocket less than 3/8 or more than 5/8 inch			340
	Size of finished top pocket(s):			
	-less than 5-3/8 or more than 5-7/8 inches wide			341
	-less than 5-7/8 or more than 6-3/8 inches deep			342

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
Detailed defects (cont'd):				
Pocket and hand openings: (cont'd)	Size of finished lower pocket(s): -small, less than 6-3/4 or more than 7-1/4 inches wide			343
	-medium, less than 7 or more than 7-1/2 inches wide			344
	-large, less than 7-1/4 or more than 7-3/4 inches wide			345
	-X-large, less than 7-1/2 or more than 8 inches wide			346
	-all sizes, less than 8-3/4 or more than 9-1/4 inches deep			347
	Width of pencil divisions of pencil pocket less than 7/8 or more than 1-1/8 inches wide			348
	Pencil pocket not positioned within left top pocket		242	
	Pencil pocket exposed beyond edges of top pocket		243	
	Ends of patch pocket opening(s) not bartacked, or tacked, in line with inside row of pocket stitching when pocket is set with 301 stitch type		244	
	Ends of patch pocket opening(s) not bartacked, or tacked, across both rows of stitching when pocket is set with 401 stitch type		245	
	One or more bartacks, or tacks, omitted at end(s) of pocket opening(s) when pocket is set with 401 stitch type	119		
	Width of hand opening hem(s) less than 3/8 or more than 1/2 inch		246	
	Hand opening(s) less than 3 inches long		247	
	Hand opening(s) varying in length by more than 1/2 inch		248	
	Bartacks at top and bottom of hand opening(s) not across side seams			349
	One or more bartacks, or tacks, omitted at top or bottom of hand opening(s)	120		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
Detailed defects (cont'd):				
Back and bottom hem	Left and right sides of vent uneven in length by more than 1/2 inch			350
	Bartack, or tack, at end of back seam (top of vent) omitted or not across both rows of stitching	121		
	Bottom hem less than 5/8 or more than 7/8 inch wide			351
	Bottom hem twisted		249	
	Bottom hem not uniform in width by more than 1/4 inch			352
	Bartack, or tack, omitted at end of side seam(s) when hem is made before side seams are joined	122		
	End of side seam(s) uneven by more than 1/4 inch when hem is made before side seams are joined		250	
Sleeves	Back seam of sleeve(s) if two-piece construction, an unequal distance from shoulder seam by more than 3/4 inch			353
	End of underarm seam(s) not even by more than 1/8 inch			354
	Sleeve hem(s) twisted		251	
	Sleeve hem less than 7/8 inch or more than 1-1/8 inches wide			355
	Sleeve hems not uniform in width by more than 1/4 inch			356
	Bartack, or tack, at end of underarm seam at wrist not across both rows of stitching		252	
	Bartack, or tack, omitted at end of underarm seam(s) at wrist	123		
Direction of seams	Back lapped on fronts at side seam(s)		253	
	Sleeves lapped on fronts at armhole(s)			357
	Seam allowances not turned toward body of smock at armhole(s) when sleeve is set with LSbm-3 seam type		254	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

4.4.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance and sleeve inseams uneven in length by more than 1/2 inch shall be classified as defects. The lot size shall be expressed in units of smocks. The sample unit shall be one smock. The inspection level shall be S-3 (see 6.5).

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; or of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling Bulged or distorted container
Content	Number of bundles per shipping container is more or less than required Number of smocks per bundle is more or less than required 1/ Size shown on one or more smocks not as specified on outer container 1/

1/ For this defect, one bundle from each container in the sample shall be examined.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 (see 6.5).

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements
Palletization	Pallet not as specified Interlocking of loads not as specified Load not bonded as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

Examine	Defect
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; or of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each smock shall be neatly folded to approximately 14-1/2 by 11-1/2 inches. Five folded smocks of one size only, each alternated end for end, shall be evenly stacked in a bundle. Each bundle shall be securely tied at each end with cotton tape or twine.

5.1.2 Commercial. Smocks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or commercial, as specified (see 6.2.).

5.2.1 Level A packing. Thirty smocks of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, two in length, one in width, and three in depth within a shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Thirty smocks of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, two in

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

length, one in width, and three in depth within a shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II, as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Smocks, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), smocks packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern or each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The smock is intended for wear by laboratory personnel of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

d. When a first article sample is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids (see 3.1).

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria, as specified in the contract or purchase order, shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptable quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects, 15.0 for major and minor A defects combined, and 25.0 for total (major, minor A, and minor B combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.5.4 For palletization examination. An AQL, expressed in terms of defects per hundred units, of 6.5 is recommended.

6.6 Subject term (key word) listing.

Laboratory clothing

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

(Project 8415-0654)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

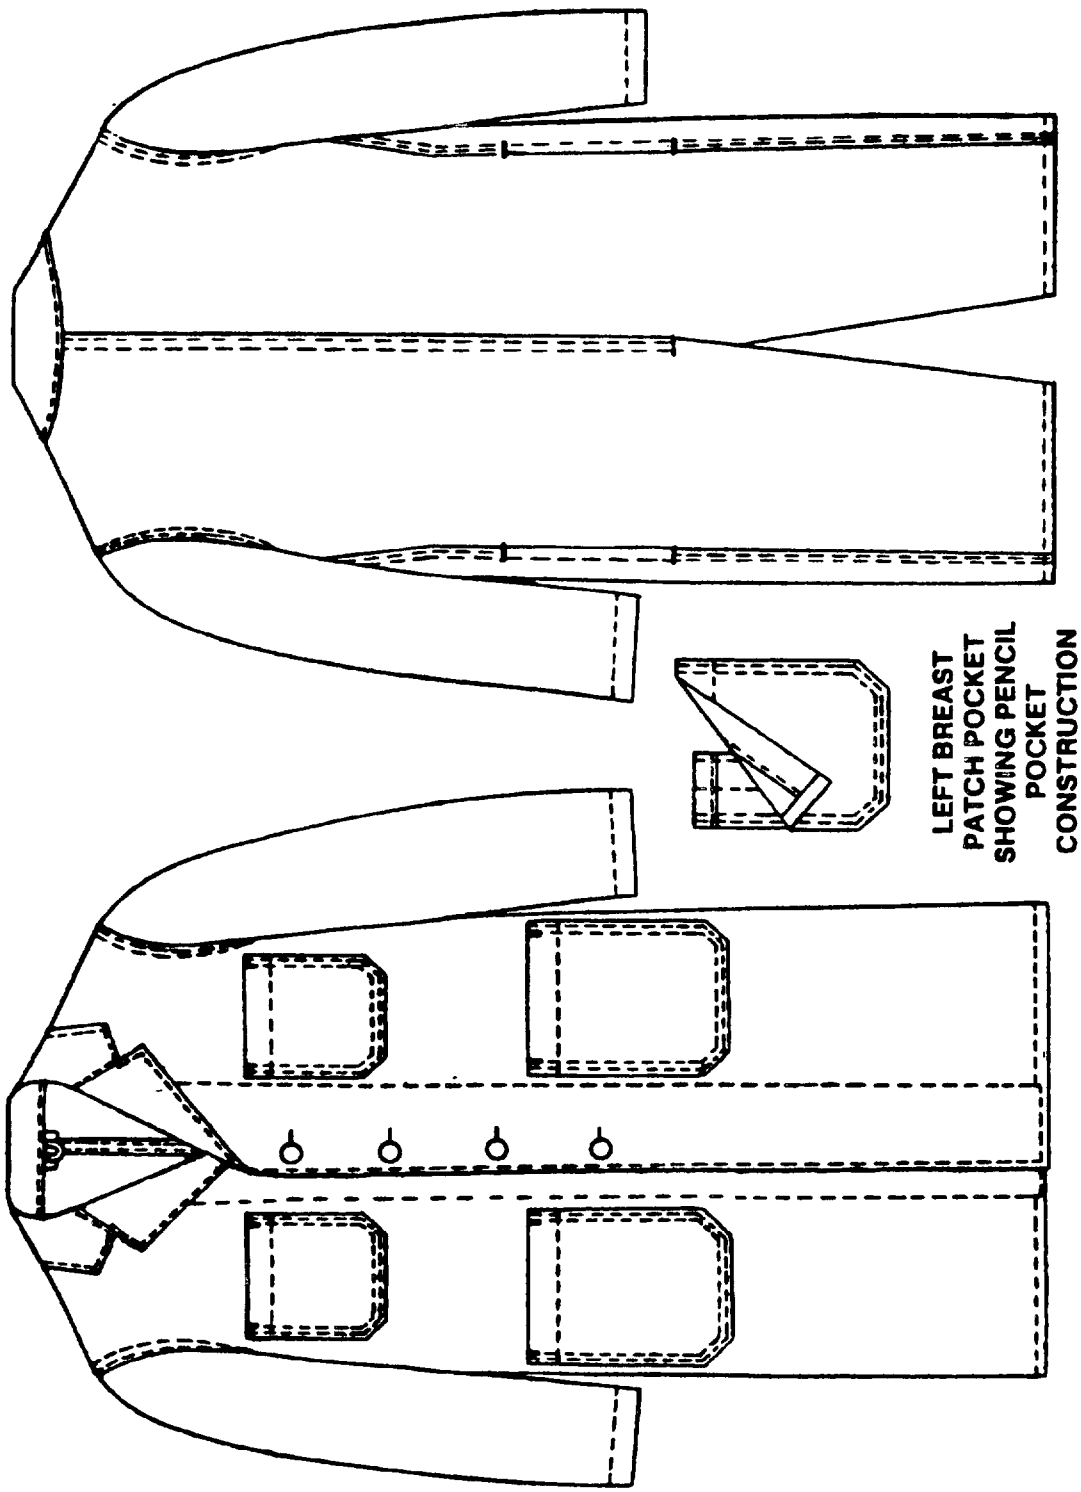


Figure 1. Smock, General Purpose

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-2124K	SMOCK, GENERAL PURPOSE

3. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provid suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:24Z
Check the source to verify that this is the current version before use.