MILITARY SPECIFICATION

SINKS, SERVICE, NAVAL SHIPBOARD

This amendment forms a part of Military Specification MIL-S-2143B(SHIPS), 7 June 1967.

Page 2

3.2.3, delete and substitute:

"3.2.3 Trap. Each sink shall be fitted with a 2-inch iron pipe size (i.p.s.) cast bronze P-trap. The trap shall have a 1-inch screw clean-out plug below the water surface. Depth of water seal shall be not less than 2 inches. The trap inlet shall be flanged to provide a seating surface for the rubber gasket of the drain fitting. The trap outlet shall be a 2-inch i.p.s. silver brazed joint in accordance with MIL-F-1183. When required (see 6.1), the trap shall be provided with an adjustable support to the deck."

Page 4

6.1, add as "(e)":

"(e) Whether or not trap support is required."

Page 5

Figure 1: Delete and substitute the attached figure.

Preparing activity:
Navy-SH
(Project 4510-N0095)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:26Z
Check the source to verify that this is the current version before use.

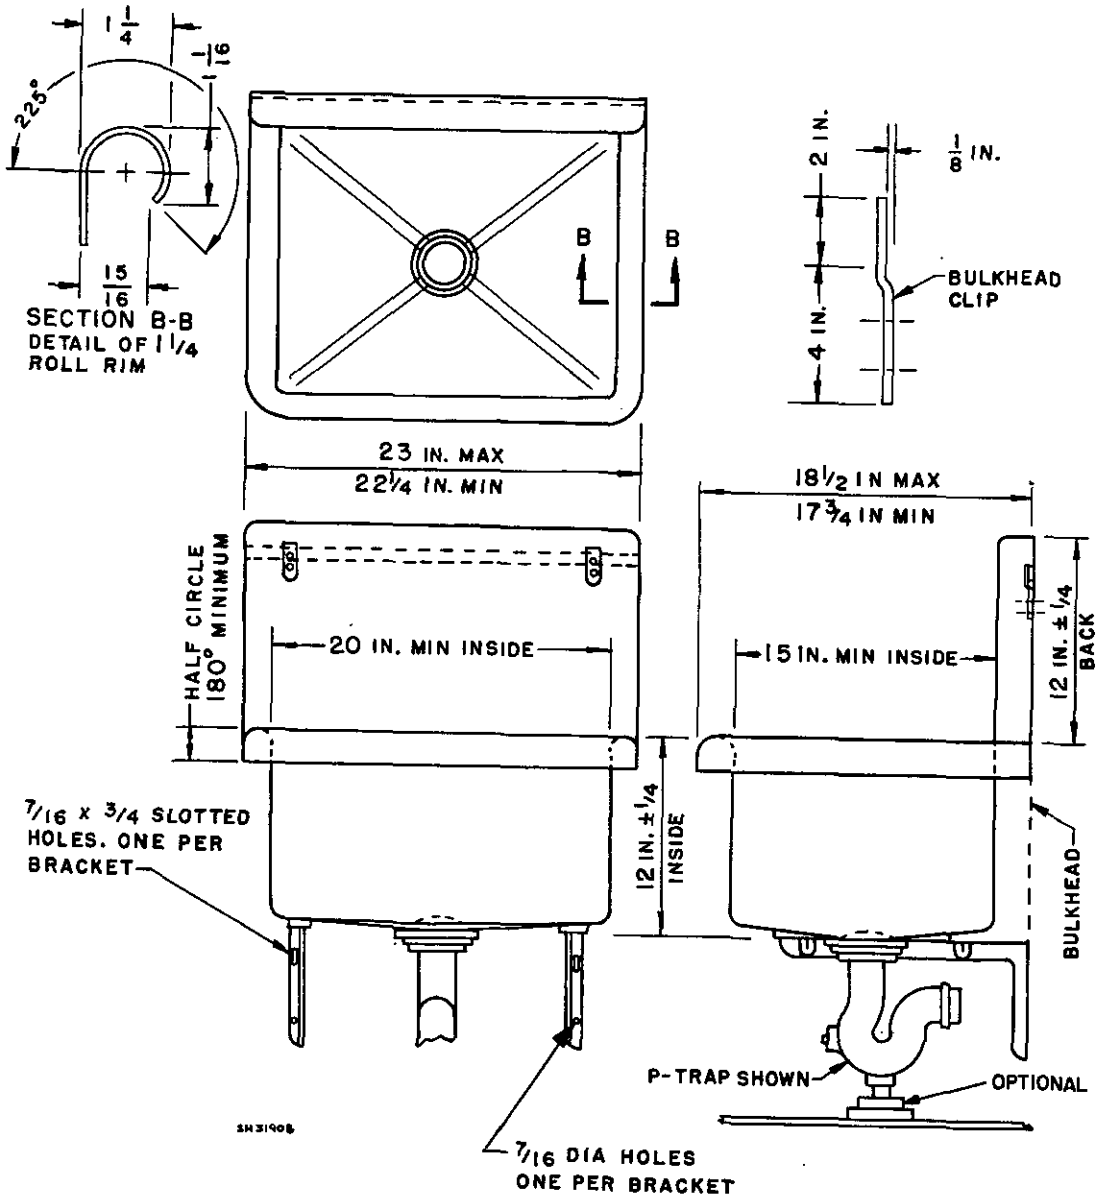

Figure 1 - Service sink.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:26Z
Check the source to verify that this is the current version before use.