INCH-POUND


MIL-C-24758/10 (SH)
5 August 1991

MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR TRIAXIAL CONNECTORS


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

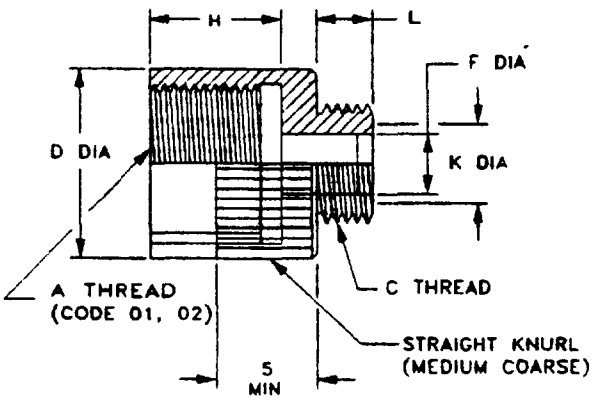

STYLE 01

ADAPTER WITH INTERNAL "A" THREAD

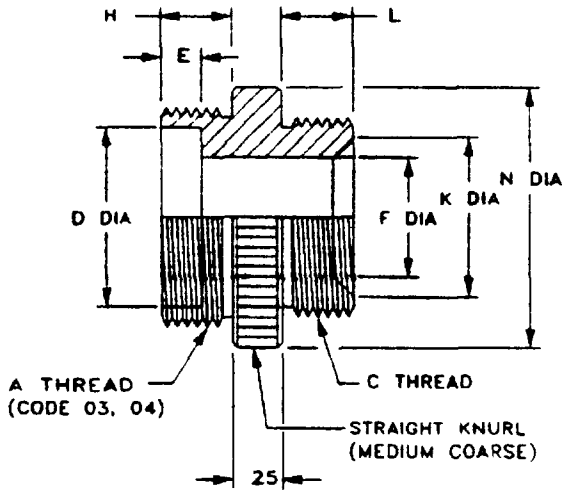

STYLE 02

ADAPTER WITH EXTERNAL "A" THREAD

NOTES:
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

SIZE CODE	CONDUIT C THREAD (Class 2A)	ADAPTER L ±.02	K DIA (Min.)	N DIA ±.02
02	0.4375 - 28 UNEF	0.21	0.25	0.687
03	0.5625 - 24 UNEF	0.25	0.37	0.812
04	0.6875 - 24 UNEF	0.25	0.50	0.937
05	0.8125 - 20 UNEF	0.31	0.62	1.062
06	0.9375 - 20 UNEF	0.31	0.75	1.187
08	1.250 - 18 UNEF	0.37	1.00	1.500
10	1.5625 - 18 UNEF	0.37	1.25	1.812
12	1.875 - 16 UN	0.43	1.50	2.125
16	2.375 - 16 UN	0.43	2.00	2.625
20	2.875 - 16 UN	0.43	2.50	3.125
24	3.375 - 16 UN	0.43	3.00	3.625

TABLE II . A-THREAD CODE and adapter dimensions.


A THREAD CODE	CONNECTOR PART NO. ITT/CANNON	FORMERLY GREMAR	A THREAD	D DIA MIN	E MIN	F DIA MIN	H ±.02	CABLE(REF.) TYPE	CD
01	152105-2380	5633	.750-16 UNF-2B	0.875	-	0.297	0.562	RG-233/U	0.216
								RG-58C/U	0.195
02	152100-2390	7991	.875-20 UNEF-2B	1.000	-	0.515	0.500	RG214/U	0.425
								RG-98/U	0.420
03	152190-0000	16312	1.0625-18 UNEF-2A	0.922	0.187	0.564.	0.312	RG-14A/U	0.545
								RG-293A/U	0.545
								*TRF-8	0.500
04		11865	1.0625-18 UNEF-2A	0.922	0.227	0.564	0.335	RG-14A/U	0.545
								RG-293A/U	0.545
								*TRF-8	0.500

* TIMES WIRE & CABLE COMPANY

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

NOTES:
1. The M24758/10 adapter couples triaxial connectors to M24758/2, M24758/3 or M24758/4 fittings.
2. Dimensions are in inches.
3. Dimensions and configurations: See figure 1 and tables I and II.
4. Material, finish and markings: See MIL-C-24758 (SH).

Part or Identification Number (PIN) Example:

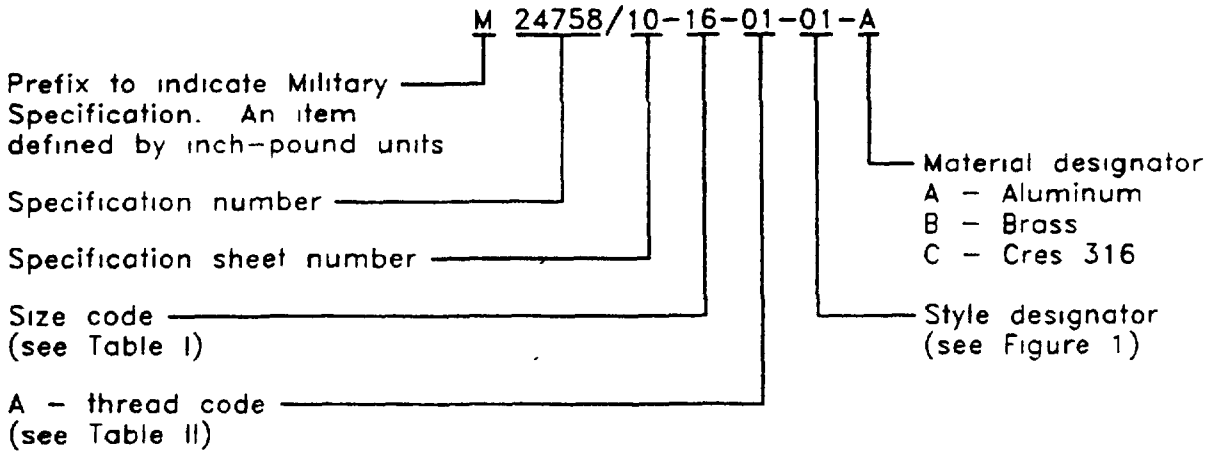

Preparing Activity:
Navy - SH
(Project 5875-N651-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.