
MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR COAXIAL CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

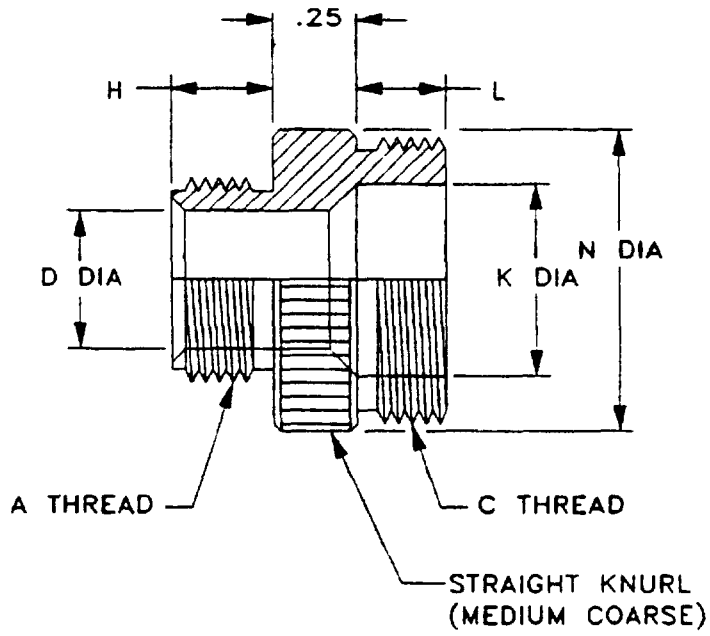

NOTES:
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

CONDUIT SIZE CODE	C THREAD (Class 2A)	ADAPTER (CONDUIT END) L ±.02	K DIA (Min.)	N DIA ±.02
02	0.4375 - 28 UNEF	0.21	0.25	0.687
03	0.5625 - 24 UNEF	0.25	0.37	0.812
04	0.6875 - 24 UNEF	0.25	0.50	0.937
05	0.8125 - 20 UNEF	0.31	0.62	1.062
06	0.9375 - 20 UNEF	0.31	0.75	1.187
08	1.250 - 18 UNEF	0.37	1.00	1.500
10	1.5625 - 18 UNEF	0.37	1.25	1.812
12	1.875 - 16 UN	0.43	1.50	2.125
16	2.375 - 16 UN	0.43	2.00	2.625
20	2.875 - 16 UN	0.43	2.50	3.125
24	3.375 - 16 UN	0.43	3.00	3.625

TABLE II. A-Thread and fitting dimensions.


ADAPTER (CONNECTOR END) A THREAD CODE	A THREAD (CLASS 2A)	H +.03 -.00	D DIA +.02 -.00	COAXIAL CABLE TYPE	OD
02	0.375 - 32 UNEF	0.21	0.226	RG-58, RG-223	0.195, 0.216
04	0.4375 - 28 UNEF	0.25	0.345	RG-5, RG-5, RG-21	0.332
06	0.625 - 24 UNEF	0.31	0.433	RG-9, RG-214	0.420, 0.425
08	0.6875 - 24 UNEF	0.31	0.568	RG-14, RG-293	0.545
10	0.8125 - 20 UNEF	0.31	0.650	RG-57, RG-294	0.625, 0.630
12	1.250 - 18 UNEF	0.31	0.895	RG-17	0.870

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

NOTES:

1. The M24758/11 adapter couples coaxial connectors to M24758/2, M24758/3 or M24758/4 fittings.
2. Select an A-thread from Table II which matches that of the back nut on the connector being used. If none of the A-threads match, substitute the desired A-thread information in lieu of the A-thread code in the part number. For example, a fitting for a 0.375" Conduit with a 0.5-28 A-thread of 0.3125" H-length would have the part number M24758/11-03-0.5-28-0.3125-A (or C).
3. Dimensions are in inches.
4. Dimensions and configurations: See figure 1 and tables I and II.
5. Material, finish and markings: See MIL-C-24758(SH).

Part or Identifying Number (PIN) Example:

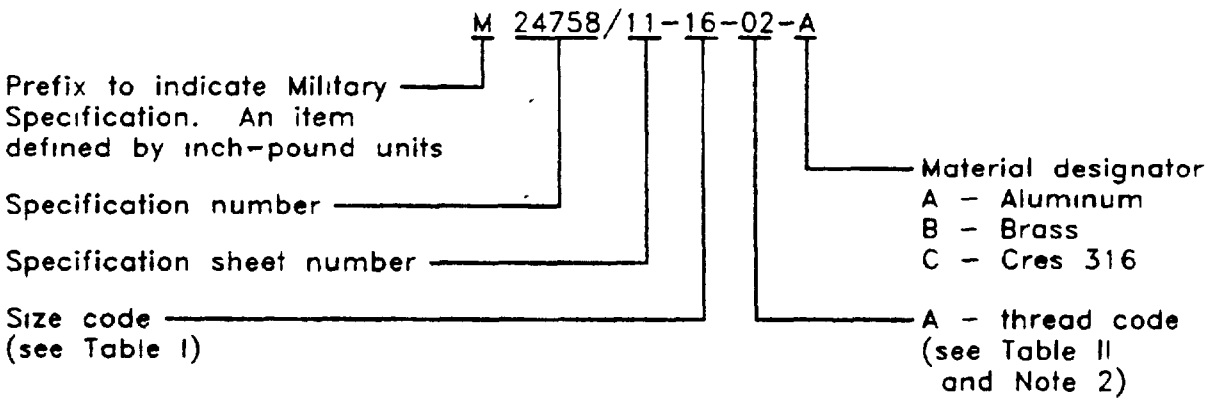

Preparing Activity:
Navy - SH
(Project 5975-N651-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.