INCH-POUND


MIL-C-24758/12 (SH)
5 August 1991

MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR MIL-C-26482 CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specification and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

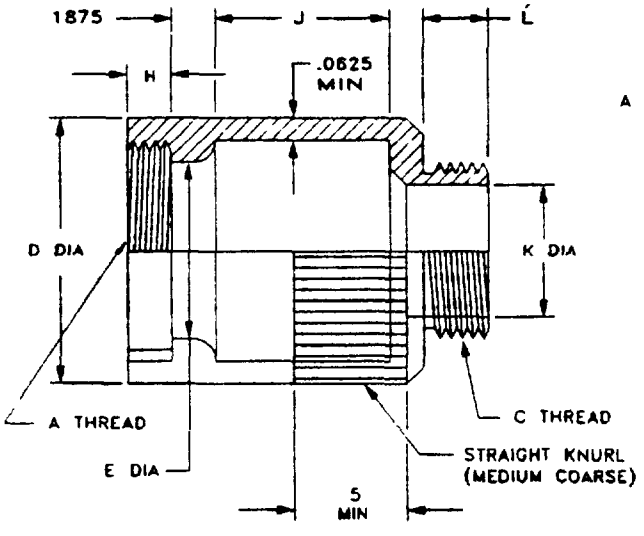


STYLE 01

FOR USE WHEN E DIAMETER IS GREATER THAN K DIAMETER

STYLE 02

SAME AS STYLE 01 EXCEPT J DIMENSION IS ZERO

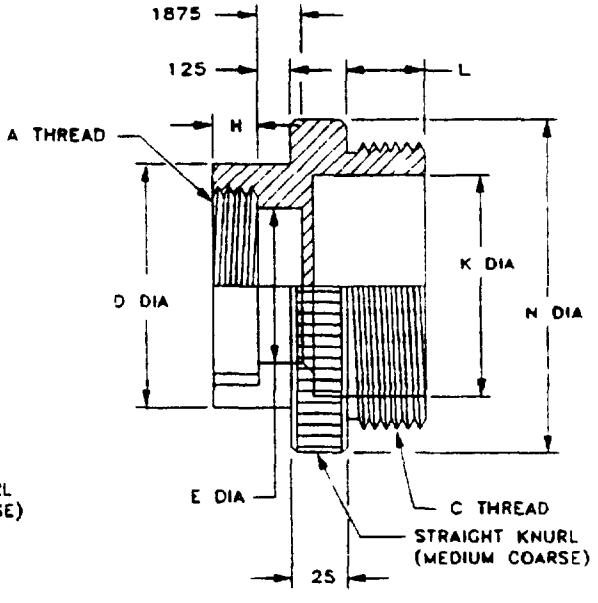

STYLE 03

FOR USE WHEN E DIAMETER IS EQUAL TO OR LESS THAN K DIAMETER

NOTES:
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

CONDUIT		ADAPTER		
SIZE CODE	C THREAD (Class 2A)	L ±.02	K DIA (Min.)	N DIA ± .02
02	0.4375 - 28 UNEF	0.21	0.25	0.687
03	0.5625 - 24 UNEF	0.25	0.37	0.812
04	0.6875 - 24 UNEF	0.25	0.50	0.937
05	0.8125 - 20 UNEF	0.31	0.62	1.062
06	0.9375 - 20 UNEF	0.31	0.75	1.187
08	1.250 - 18 UNEF	0.37	1.00	1.500
10	1.5625 - 18 UNEF	0.37	1.25	1.812
12	1.875 - 16 UN	0.43	1.50	2.125
16	2.375 - 16 UN	0.43	2.00	2.625
20	2.875 - 16 UN	0.43	2.50	3.125
24	3.375 - 16 UN	0.43	3.00	3.625

TABLE II. A-Thread code and adapter dimensions.


A THREAD CODE	CONN SHELL SIZE	A THREAD (CLASS 2B)	H (NOTE 3) ±.02	D DIA ±.02	E DIA ±.02	J (STYLE 01)* ±.03
07	8	0.4375 - 28 UNEF	(NOTE 4)	0.59	0.34	0.87
09	10	0.5625 - 24 UNEF	(NOTE 4)	0.71	0.45	0.87
11	12	0.6875 - 24 UNEF	(NOTE 4)	0.84	0.57	0.87
13	14	0.8125 - 20 UNEF	0.21	0.96	0.68	0.87
15	16	0.9375 - 20 UNEF	0.21	1.09	0.81	0.87
17	18	1.0625 - 18 UNEF	0.21	1.21	0.93	1.06
19	20	1.1875 - 18 UNEF	(NOTE 4)	1.34	1.06	1.18
21	22	1.3125 - 18 UNEF	(NOTE 4)	1.46	1.18	1.62
23	24	1.4375 - 18 UNEF	0.21	1.59	1.31	1.68

*FOR STYLE 02, J DIMENSION IS ZERO.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

*NOTES:
1. The M24758/12 adapter couples MIL-C-26482 connectors (MS3110, MS3111, or MS3116 series) to M24758/2, M24758/3 or M24758/4 fittings.
2. For MIL-C-26482, series 2, the M24758/13 adapter may be used.
3. The thread length, H, is critical, if a die is used to cut the thread, the H dimension is as shown. If a lathe is used to cut the thread, reduce H dimension by 0.06 Inches.
4. Dimension not available.
5. Dimensions are in inches.
6. Dimensions and configurations: See figure 1 and tables I and II.
7. Material, finish and markings: See MIL-C-24758 (SH).

Part or Identifying Number (PIN) Example:

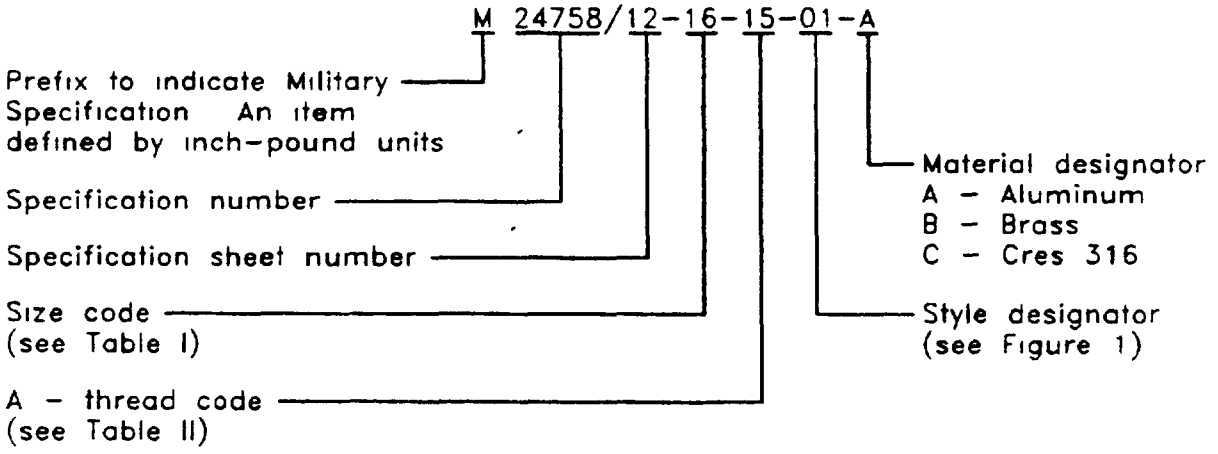

Preparing Activity:
Navy - SH
(Project 5975-N651-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.