INCH-POUND


MIL-C-24758/13 (SH)
5 August 1991

MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR MS3155-TYPE CONNECTORS


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

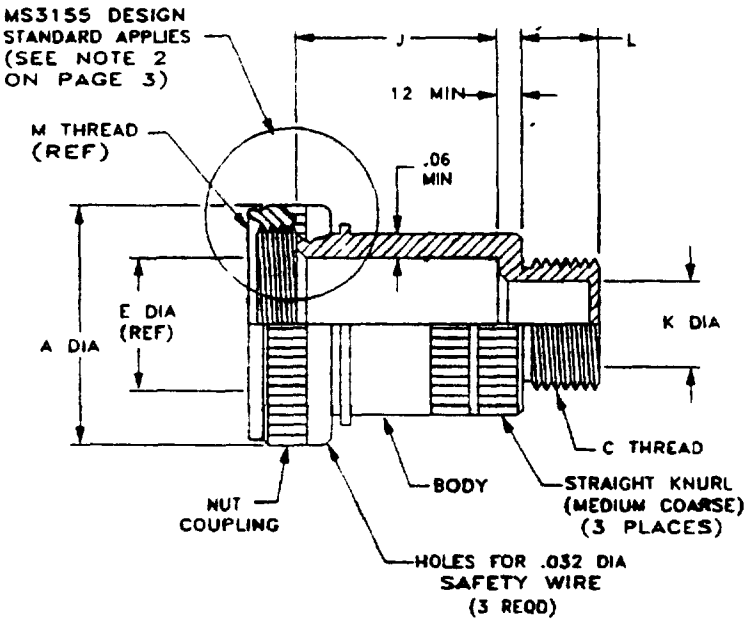

STYLE 01

FOR USE WHEN E DIAMETER IS GREATER THAN K DIAMETER

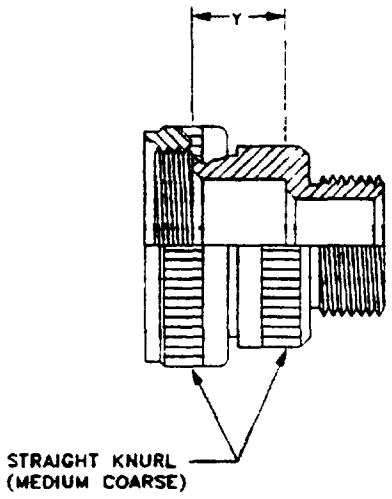

STYLE 02

SAME AS STYLE 01, EXCEPT THAT DIMENSION Y IS LESS THAN DIMENSION J. STYLE 02 IS USED WHEN THE EXTRA WORKING ROOM PROVIDED BY DIMENSION J OF STYLE 01 IS NOT A REQUIREMENT


NOTES:
1. Dimensions are in inches.

FIGURE 1. Dimensions and configuraitons.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

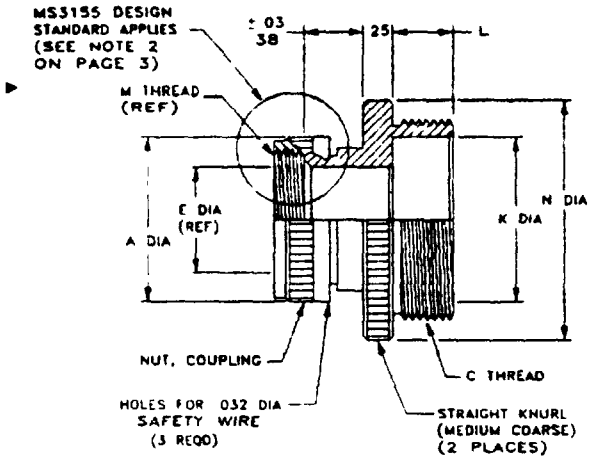

STYLE 01

FOR USE WHEN E DIAMETER IS EQUAL TO OR LESS THAN K DIAMETER

NOTES:

1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations - continued.

TABLE I. Connector dash numbers and fitting dimensions.

CONNECTOR SHELL SIZE					ADAPTER				
CONN DASH NO.	NAS 1599 AND MIL-C-83723 (Series 1 & 3)	MIL-C-5015 (MS3400 Series) *	MIL-C-81703 (NAVY) (Series 3)	MIL-C-26482 (Series 2) **	A DIA (Max.)	M THREAD (Class 2B) (Ref.)Note 3	E DIA (Ref.) Note 3	J ±.03 (Style 01)	Y ±.03 (Style 02)
03	--	--	3	--	0.669	0.562-24 UNEF	0.2701	0.06	0.62
08	8	8S	--	8	0.617	0.500-20 UNF	0.2701	0.06	0.62
10	10	10S,10SL	--	10	0.734	0.625-24 UNEF	0.375	1.06	0.69
12	12	12,12S	7	12	0.858	0.750-20 UNEF	0.511	1.06	0.69
14	14	14,14S	12	13	0.984	0.875-20 UNEF	0.585	1.06	0.75
16	16	16,16S	19	16	1.112	1.000-20 UNEF	0.710	1.06	0.75
18	18	18	27	18	1.218	1.062-18 UNEF	0.789	1.12	0.75
20	20	20	37	20	1.345	1.188-18 UNEF	0.914	1.38	0.81
22	22	22	--	22	1.468	1.312-18 UNE	1.039	1.83	0.81
24	24	24	--	24	1.593	1.438-18 UNEF	1.154	1.83	0.81
28	--	28	--	--	1.969	1.750-18 UNS	1.389	2.30	0.88
32	--	32	--	--	2.219	2.000-18 UNS	1.635	2.55	0.88
36	--	36	--	--	2.469	2.250-16 UN	11.850	2.80	0.88
40	--	40	--	--	2.719	2.500-16 UN	2.065	3.05	0.94
44	--	44	--	--	2.969	2.750-16 UN	2.320	3.55	0.94
48	--	48	--	--	3.219	3.000-16 UN	2.570	3.62	0.94
61	--	--	61	--	1.653	1.500-18 UNEF	1.194	1.88	0.81

* FOR MS3101, MS3106, OR MS3106 CONNECTORS, USE M24758/9 FITTING.
** FOR MS3110, MS3111, OR MS3106 CONNECTORS, USE M24758/12 FITTING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.


TABLE II. Dimensions.

CONDUIT SIZE CODE	C THREAD (Class 2A)	ADAPTER L DIA ±.02	K DIA (Min.)	N ±.02
02	0.4375 - 28 UNEF	0.21	0.25	0.687
03	0.5625 - 24 UNEF	0.25	0.37	0.812
04	0.6875 - 24 UNEF	0.25	0.50	0.937
05	0.8125 - 20 UNEF	0.31	0.62	1.062
06	0.9375 - 20 UNEF	0.31	0.75	1.187
08	1.250 - 18 UNEF	0.37	1.00	1.500
10	1.5625 - 18 UNEF	0.37	1.25	1.812
12	1.875 - 16 UN	0.43	1.50	2.125
16	2.375 - 16 UN	0.43	2.00	2.625
20	2.875 - 16 UN	0.43	2.50	3.125
24	3.375 - 16 UN	0.43	3.00	3.625

NOTES:

1. The M24758/13 adapter couples connectors listed in table I to M24758/2, M24758/3, or M24758/4 conduit fittings.
2. The coupling nut end of this adapter shall conform to military standard MS3155 (Navy), "connector, electric, rear accessory design standard." MS3155 takes precedence over this specification.
3. The E diameter and M-thread of this specification are the same as the E diameter and M-thread of MS3155, and are included for reference purposes.
4. All dimensions are in inches.
5. Dimensions and configurations: See figure 1 and tables I and II.
6. Material, finish and markings: See MIL-C-24758 (SH).

Part or Identifying Number (PIN) Example:

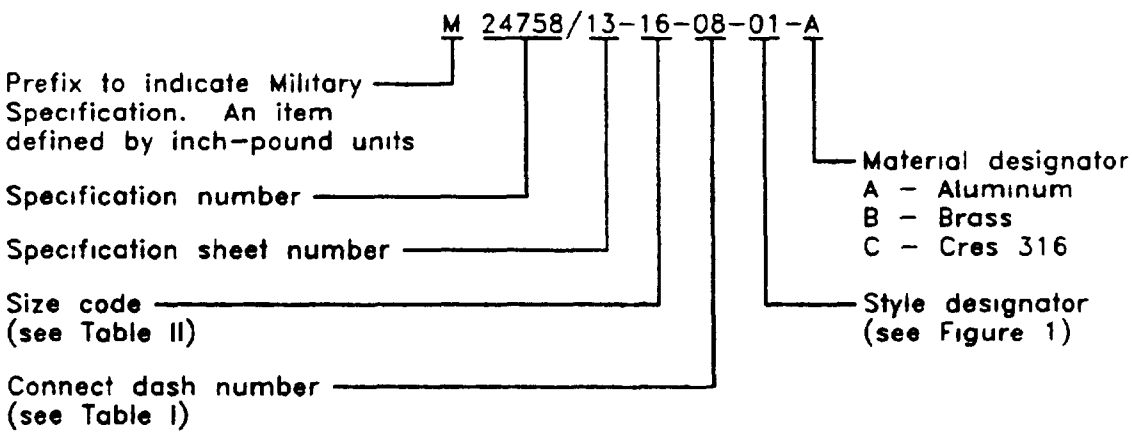

Preparing Activity:
Navy - SH
(Project 5975-N651-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.