INCH-POUND


MIL-C-24758/14 (SH)
5 August 1991

MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR MIL-C-28840 (EC) BACKSHELLS


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

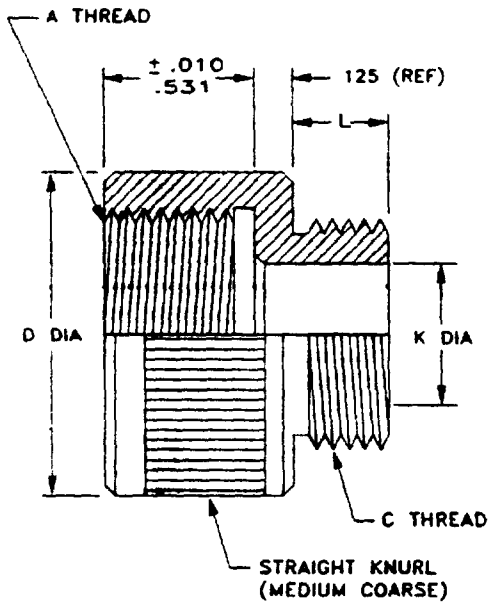


STYLE 01

FOR USE WHEN K DIAMETER IS SMALLER THAN THE E DIAMETER OF STYLE 02

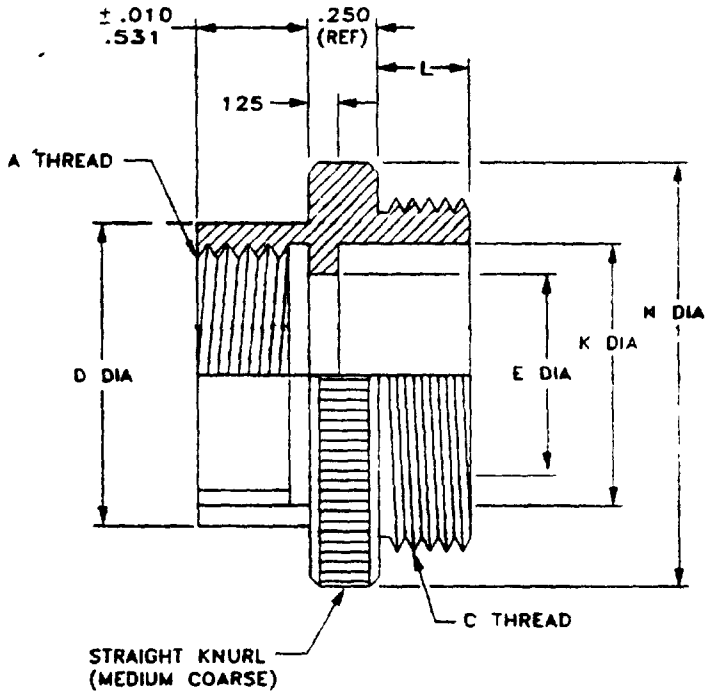


STYLE 02

FOR USE WHEN K DIAMETER IS EQUAL TO OR LARGER THAN E DIAMETER

**NOTES:**
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

| CONDUIT | | ADAPTER | | |
|---|---|---|---|---|
| SIZE CODE | C THREAD (Class 2A) | L ±.02 | K DIA (Min.) | N DIA ± .02 |
| 02 | 0.4375 - 28 UNEF | 0.21 | 0.25 | 0.687 |
| 03 | 0.5625 - 24 UNEF | 0.25 | 0.37 | 0.812 |
| 04 | 0.6875 - 24 UNEF | 0.25 | 0.50 | 0.937 |
| 05 | 0.8125 - 20 UNEF | 0.31 | 0.621 | 0.062 |
| 06 | 0.9375 - 20 UNEF | 0.31 | 0.75 | 1.187 |
| 08 | 1.250 - 18 UNEF | 0.37 | 1.00 | 1.500 |
| 10 | 1.5625 - 18 UNEF | 0.37 | 1.25 | 1.812 |
| 12 | 1.875 - 16 UN | 0.41 | 1.50 | 2.125 |
| 16 | 2.375 - 16 UN | 0.43 | 2.00 | 2.625 |
| 20 | 2.875 - 16 UN | 0.43 | 2.50 | 3.125 |
| 24 | 3.375 - 16 UN | 0.43 | 3.00 | 3.625 |

TABLE II. A-THREAD code and adapter dimensions.

| A THREAD CODE | SHELL SIZE (Ref.) | A THREAD (CLASS 2) | D DIA +.015 | E DIA +.015 |
|---|---|---|---|---|
| 01 | B,C | 0.625 - 24 UNEF | 0.875 | 0.453 |
| 02 | B,C | 0.750 - 20 UNEF | 1.000 | 0.578 |
| 03 | C | 0.875 - 20 UNEF | 1.125 | 0.703 |
| 04 | D,E | 1.000 - 20 UNEF | 1.250 | 0.828 |
| 05 | C,D,F | 1.188 - 18 UNEF | 1.438 | 1.000 |
| 06 | D,E,F,G | 1.438 - 18 UNEF | 1.688 | 1.250 |
| 07 | F,G,H | 1.750 - 18 UNS | 2.000 | 1.562 |
| 08 | G,H,J | 2.000 - 18 UNS | 2.250 | 1.813 |
| 09 | J | 2.250 - 16 UN | 2.250 | 2.062 |
| 10 | C,D,E | 1.125 - 18 UNEF | 1.375 | 0.938 |
| 11 | C,D,E,F,G | 1.250 - 18 UNEF | 1.500 | 1.078 |
| 12 | D,E,F,G | 1.625 - 18 UNEF | 1.875 | 1.438 |
| 13 | F,G,H | 1.875 - 18 UNS | 2.125 | 1.688 |
| 14 | G,H,J | 2.125 - 16 UN | 2.375 | 1.938 |
| 15 | J | 2.750 - 16 UN | 3.000 | 2.563 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

**NOTES:**

1. The M24758/14 adapter provides a non-environmental coupling between certain MIL-C-28840(EC) backshells and the M24758/2, M24758/3 or M24758/4 fittings, specifically, the A-thread of this adapter mates with the V-thread of the M28840/6 backshell (straight), the M28840/8 backshell (90°), or the M28840/9 backshell (45°).
2. Dimensions are in inches.
3. Dimensions and configurations: See figure 1 and tables I and II.
4. Material, finish and markings: See MIL-C-24758 (SH).

**Part or Identifying Number (PIN) Example:**

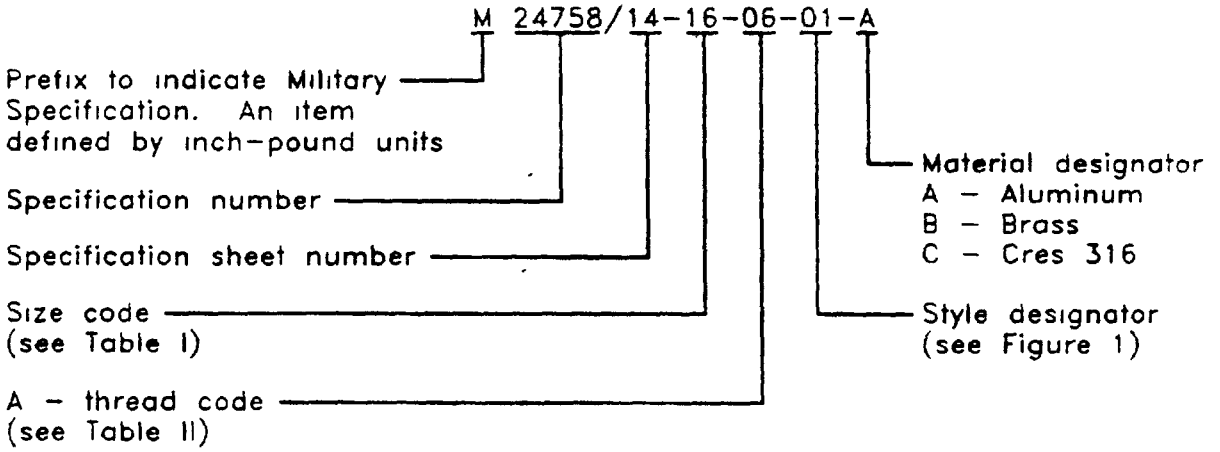


**Preparing Activity:**
**Navy - SH**
**(Project 5975-N651-14)**



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.