INCH-POUND
MIL-C-24758/15(SH)
AMENDMENT 1
23 September 1994


MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR MIL-S-24235 STUFFING TUBES

This amendment forms a part of MIL-C-24758/15(SH), dated 5 August 1991, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1: Delete and substitute:

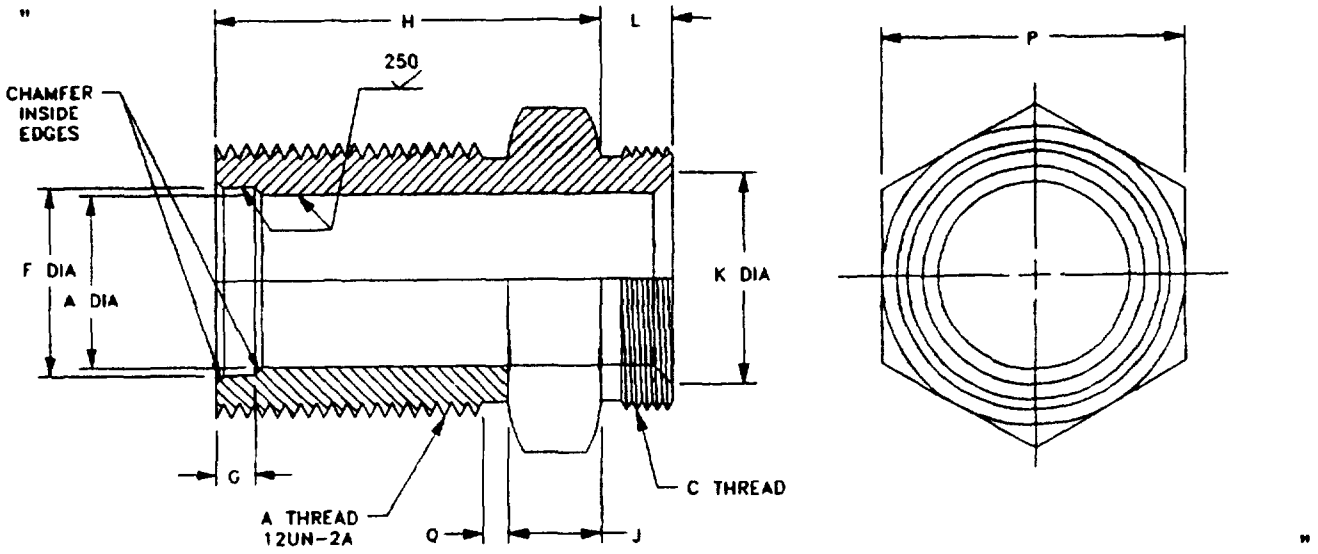

NOTES:
1 Dimensions are in inches

AMSC N/A FSC 5975
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

TABLE I: Delete and substitute:

"TABLE I. A-Thread code and adapter dimensions.

Stuffing Tube Size	Conduit Size Code	A DIA	A Thread	H ±.02	J ±.02	P DIM	Q ±.02	F DIA	G DIM
A	03	0.406	0.875	1.0625	0.1875	1.03125	0.1875	0.5625	0.250
B	04	0.515	1.0	1.0625	0.1875	1.125	0.1875	0.6875	0.250
C	04,05,06	0.640	1.125	1.0625	0.1875	1.250	0.1875	0.8125	0.250
D	06	0.750	1.25	1.0625	0.1875	1.375	0.1875	0.9375	0.250
E	06	0.812	1.25	1.0625	0.1875	1.375	0.1875	0.9375	0.250
F	08	0.843	1.3125	1.1875	0.1875	1.4375	0.1875	1.0000	0.250
G	08	0.953	1.5	1.1875	0.1875	1.6563	0.1875	1.1875	0.250
J	10	1.062	1.625	1.1875	0.1875	1.7813	0.1875	1.2500	0.250
K	10	1.171	1.75	1.5	0.1875	1.875	0.1875	1.3750	0.250
L	10	1.265	1.8125	1.5	0.1875	1.9375	0.1875	1.4375	0.250
M	10,12	1.406	2.0	1.5	0.1875	2.1875	0.1875	1.6250	0.250
N	12	1.515	2.0625	1.5625	0.25	2.25	0.1875	1.6875	0.250
P	16	1.625	2.1875	1.5625	0 25	2.3438	0.1875	1.8125	0.250
R	16	1.750	2.3125	1.5625	0.25	2.4688	0.1875	1.9375	0.250
S	16	1.875	2.6875	2.1875	0.3125	2.8125	0.25	2.15625	0.375
T	16	2.062	2.875	2.1875	0.3125	2.9688	0.25	2.3125	0.375
V	16	2.187	3 0	2.1875	0 3125	3.0938	0.25	2 4375	0 375
W	16,20	2.312	3.125	2.1875	0 3125	3.2813	0.25	2.5625	0.375
X	20	2.500	3.25	2.1875	0 3125	3.4375	0.25	2 6875	0.375
Y	20	2.609	3.375	2.1875	0.3125	3.5625	0.25	2.8175	0.375
Z	20	2.781	3.5625	2.1875	0.3125	3 75	0.25	3.15625	0.375
AA	20,24	2.875	3.75	3.125	0.4375	3.875	0.25	3.15625	0.375
BB	24	3.157	4 0	3.125	0.4375	4.125	0.25	3.15625	0.375

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

NOTE:

1. The adapter may be manufactured with equivalent "A" and "F" diameters.

Preparing activity:
Navy - SH
(Project 5975-N091)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.