INCH-POUND


MIL-C-24758/15 (SH)
5 August 1991

MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR MIL-S-24235 STUFFING TUBES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

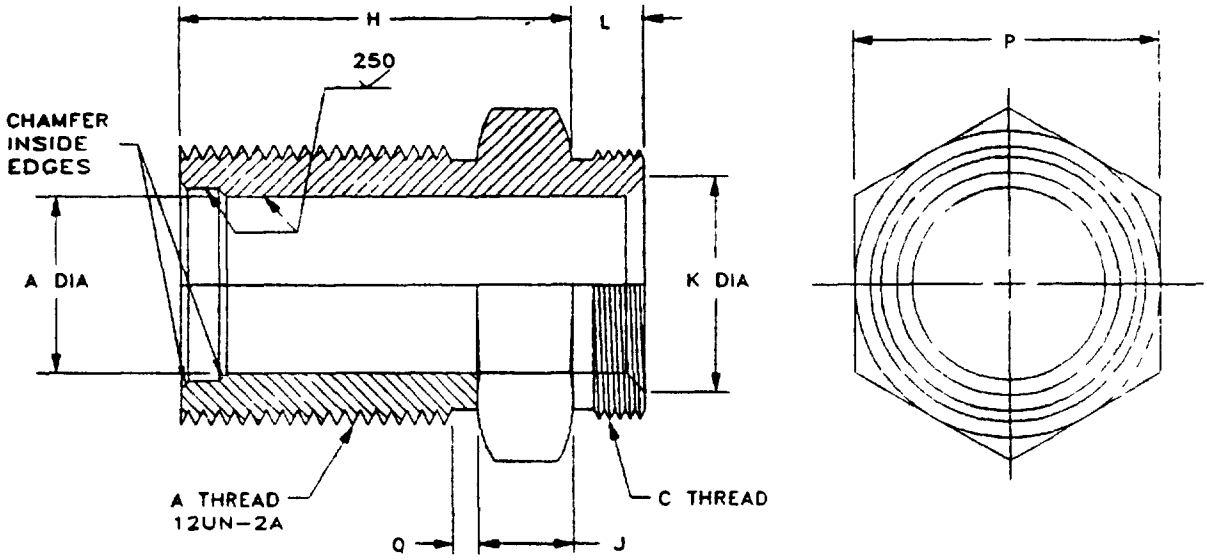

NOTES:
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

TABLE I. A-Thread code and adapter dimensions.

MIL-S-24235/9,17 Stuffing Tube Size	Conduit Size Code	A DIA	A Thread	H ±.02	J ±.02	P DIM	Q ±.02
A	03	0.406	0.875	1.0625	0.1875	1.03125	0.1875
B	04	0.515	1.0	1.0625	0.1875	1.125	0.1875
C	04,05,06	0.640	1.125	1.0625	0.1875	1.250	0.1875
D	06	0.750	1.25	1.0625	0.1875	1.375	0.1875
E	06	0.812	1.25	1.0625	0.1875	1.375	0.1875
F	08	0.843	1.3125	1.1875	0.1875	1.4375	0.1875
G	08	0.953	1.5	1.1875	0.1875	1.6563	0.1875
J	10	1.062	1.625	1.1875	0.1875	1.7813	0.1875
K	10	1.171	1.75	1.5	0.1875	1.875	0.1875
L	10	1.265	1.8125	1.5	0.1875	1.9375	0.1875
M	10,12	1.406	2.0	1.5	0.125	2.1875	0.1875
N	12	1.515	2.0625	1.5625	0.25	2.25	0.1875
P	16	1.625	2.1875	1.5625	0.25	2.3438	0.1875
R	16	1.750	2.3125	1.5625	0.25	2.4688	0.1875
S	16	1.875	2.6875	2.1875	0.3125	2.8125	0.25
T	16	2.062	2.875	2.1875	0.3125	2.9688	0.25
V	16	2.187	3.0	2.1875	0.3125	3.0938	0.25
W	16,20	2.312	3.125	2.1875	0.3125	3.2813	0.25
X	20	2.500	3.25	2.1875	0.3125	3.4375	0.25
Y	20	2.609	3.375	2.1875	0.3125	3.5625	0.25
Z	20	2.781	3.5625	2.1875	0.3125	3.75	0.25
AA	20,24	2.875	3.75	3.125	0.4375	3.875	0.25
BB	24	3.157	4.0	3.125	0.4375	4.125	0.25


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

CONDUIT SIZE CODE	ADAPTER C THREAD (Class 2A)	L ± .02	K DIA (Min.)
02	0.4375 - 28 UNEF	0.21	0.25
03	0.5625 - 24 UNEF	0.25	0.37
04	0.6875 - 24 UNEF	0.25	0.50
05	0.8125 - 20 UNEF	0.31	0.62
06	0.9375 - 20 UNEF	0.31	0.75
08	1.250 - 18 UNEF	0.37	1.00
10	1.5625 - 18 UNEF	0.37	1.25
12	1.875 - 16 UN	0.43	1.50
16	2.375 - 16 UN	0.43	2.00
20	2.875 - 16 UN	0.43	2.50
24	3.375 - 16 UN	0.43	3.00

NOTES:
1. The M24758/15 adapter couples MIL-S-24235/9, MIL-S-24235/17 stuffing tubes to M24758/2, M24758/3, or M24758/4 fittings.
2. Dimensions are in inches.
3. Dimensions and configurations: See figure 1 and tables I and II.
4. Material, finish and markings: See MIL-C-24758 (SH).

Part or Identifying Number (PIN) Example:

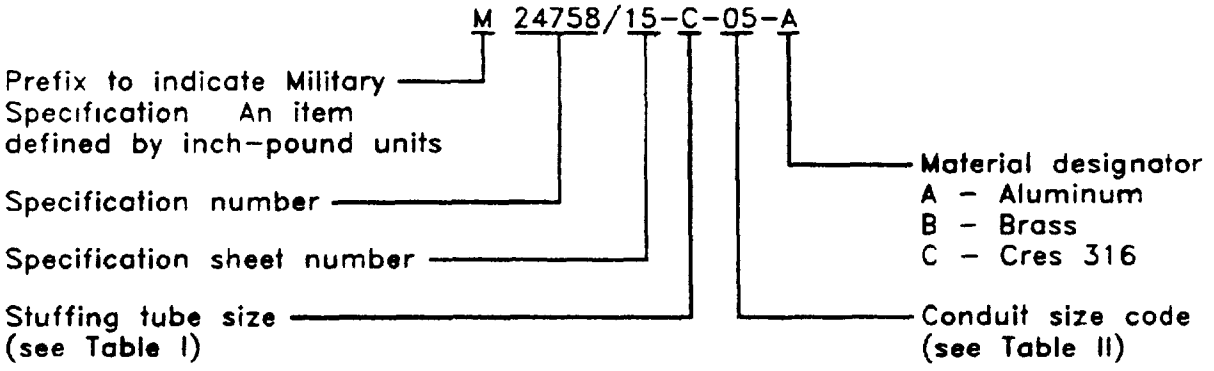

Preparing Activity:
Navy - SH
(Project 5975-N651-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.