INCH-POUND
MIL-C-24758/7(SH)
AMENDMENT 1
23 September 1994

MILITARY SPECIFICATION SHEET


CONDUIT, FLEXIBLE, WEATHERPROOF, CONDUIT-TO-STUFFING TUBE (MIL-S-24235) FITTING

This amendment forms a part of MIL-C-24758/7(SH), dated 5 August 1991, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 1

FIGURE 1: Delete and substitute:

"

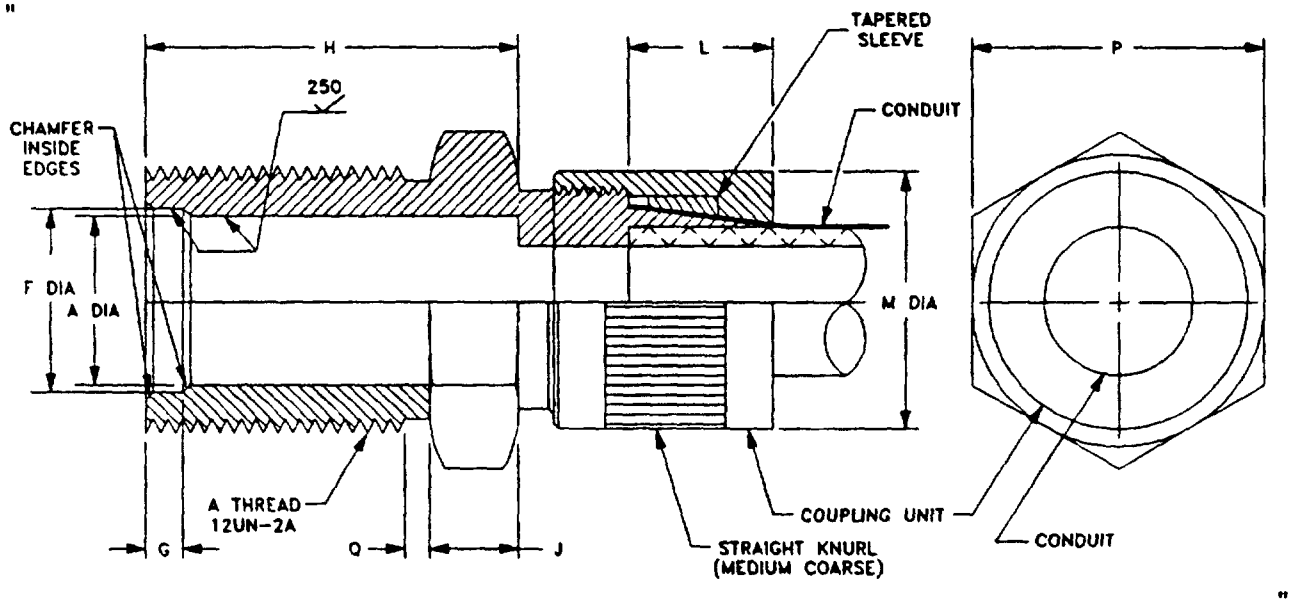

"

NOTES
Dimensions are in inches

AMSC N/A FSC 5975
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

TABLE I. Delete and substitute.

"TABLE I A-Thread code and adapter dimensions

Stuffing Tube Size	Conduit Size Code	A DIA	A Thread	H ±.02	J ±.02	P DIM	Q ±.02	L ±.06	M DIA (Max)	F DIA	G DIM
A	03	0.406	0.875	1.0625	0.1875	1.125	0.1875	0.75	1.12	0.5625	0.250
B	04	0.515	1.0	1.0625	0.1875	1.250	0.1875	0.75	1.25	0.6875	0.250
C	04	0.640	1.125	1.0625	0.1875	1.250	0.1875	0.75	1.62	0.8125	0.250
C	05	0.640	1.125	1.0625	0.1875	1.437	0.1875	0.75	1.62	0.8125	0.250
C	06	0.640	1.125	1.0625	0.1875	1.625	0.1875	0.75	1.62	0.8125	0.250
D	06	0.750	1.250	1.0625	0.1875	1.625	0.1875	0.75	1.62	0.9375	0.250
E	06	0.812	1.250	1.0625	0.1875	1.625	0.1875	0.75	1.62	0.9375	0.250
F	08	0.843	1.312	1.1875	0.1875	1.812	0.1875	1.00	1.81	1.0000	0.250
G	08	0.953	1.5	1.1875	0.1875	1.812	0.1875	1.00	1.81	1.1875	0.250
J	10	1.062	1.625	1 1875	0 1875	2.125	0.1875	1.00	2.18	1.2500	0.250
K	10	1.171	1.75	1.5	0.1875	2.125	0.1875	1.00	2.18	1.3750	0.250
L	10	1.265	1.812	1.5	0.1875	2.125	0.1875	1.00	2.18	1.4375	0.250
M	10	1.406	2.000	1.5	0.1875	2.125	0.1875	1.00	2.56	1.6250	0.250
M	12	1.406	2.000	1.5	0.1875	2.500	0.1875	1.00	2.56	1.6250	0.250
N	12	1.515	2.062	1.5625	0.25	2.500	0.1875	1.00	2.56	1.6875	0.250
P	16	1.625	2.187	1.5625	0 25	3.000	0.1875	1.00	3.06	1.8125	0.250
R	16	1.750	2.312	1.5625	0.25	3.000	0.1875	1.00	3.06	1.9375	0.250
S	16	1.875	2.687	2.1875	0.3125	3.000	0.25	1 00	3.06	2.15625	0.375
T	16	2.062	2.875	2.1875	0.3125	3.000	0.25	1.00	3.06	2.3125	0.375
V	16	2.187	3.000	2.1875	0.3125	3.000	0.25	1.00	3.06	2.4375	0.375
W	16	2.312	3.125	2.1875	0.3125	3.000	0.25	1.00	3.86	2.5625	0.375
W	20	2.3	3 125	2.1875	0.3125	3 625	0 25	1.00	3.86	2.5000	0.375
X	20	2.500	3.250	2.1875	0.3125	3 625	0.25	1 00	3.86	2.6875	0.375
Y	20	2.609	3 375	2.1875	0.3125	3.625	0.25	1.00	3.86	2.8175	0.375
Z	20	2.781	3.562	2.1875	0.3125	3.625	0.25	1.00	3.86	3.15625	0.375
AA	20	2.875	3.750	3 125	0.4375	3.625	0.25	1.00	4.38	3.15625	0.375
AA	24	2.875	3 750	3.125	0.4375	4.000	0.25	1.00	4.38	3.15625	0.375
BB	24	3 157	4 0	3.125	0 4375	4 000	0.25	1 00	4.38	3 15625	0.375


"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

Notes to Table I: Add "5 The maximum "P" dimension of the M24758/7 fitting should be larger than the outside dimension of the thread on the side of the adapter which interfaces with the conduit."

Part or Identifying Number (PIN) Example. Delete and substitute

"

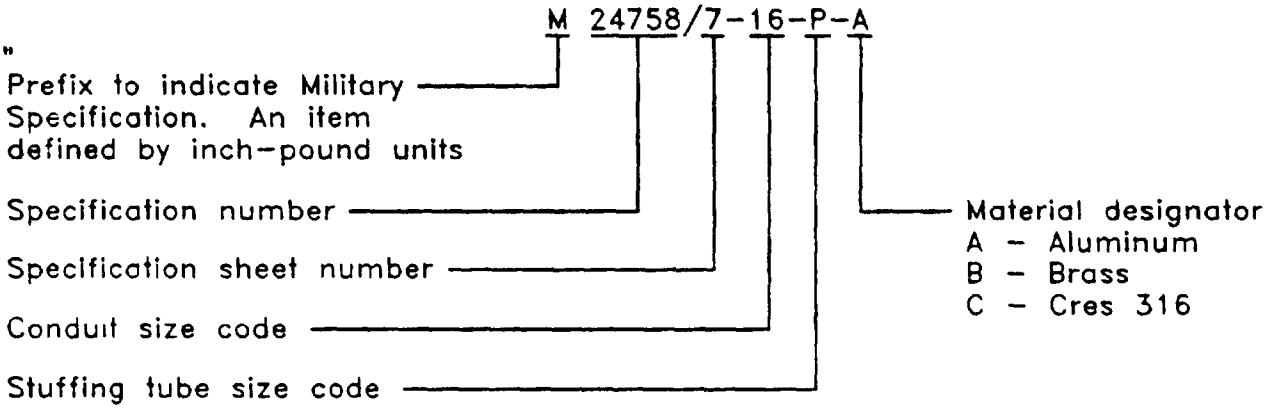

"

Preparing activity
Navy - SH
(Project 5975-N089)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.