INCH-POUND


MIL-C-24758/9 (SH)
5 August 1991

# MILITARY SPECIFICATION SHEET

## CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR MIL-C-5015 CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

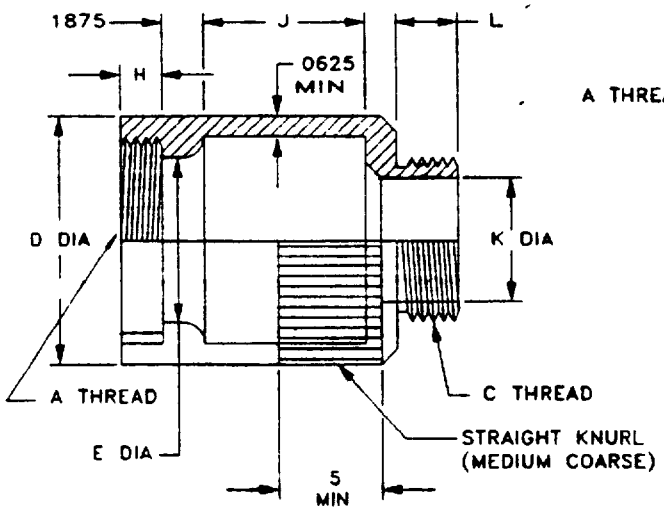



STYLE 01

FOR USE WHEN E DIAMETER IS GREATER THAN K DIAMETER

STYLE 02

SAME AS STYLE 01 EXCEPT J DIMENSION IS ZERO

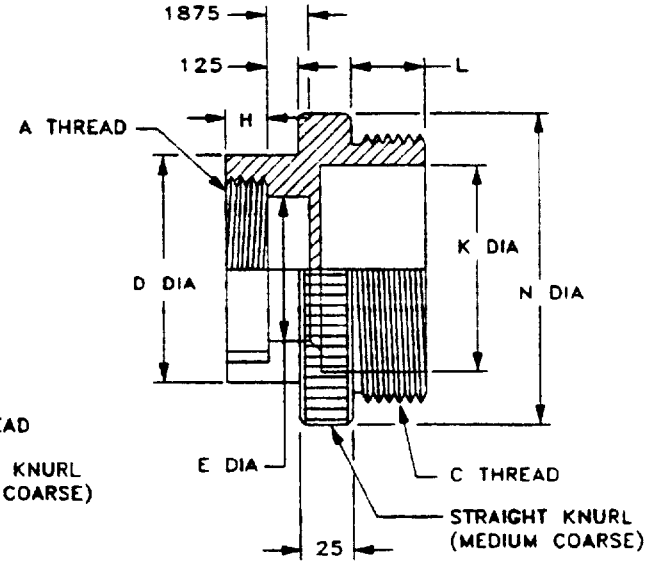


STYLE 03

FOR USE WHEN E DIAMETER IS EQUAL TO OR LESS THAN K DIAMETER

**NOTES:**
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

| CONDUIT | | ADAPTER | | |
|---|---|---|---|---|
| SIZE CODE | C THREAD (Class 2A) | L ±.02 | K DIA (Min.) | N DIA ±.02 |
| 02 | 0.4375 - 28 UNEF | 0.21 | 0.25 | 0.687 |
| 03 | 0.5625 - 24 UNEF | 0.25 | 0.37 | 0.812 |
| 04 | 0.6875 - 24 UNEF | 0.25 | 0.50 | 0.937 |
| 05 | 0.8125 - 20 UNEF | 0.31 | 0.62 | 1.062 |
| 06 | 0.9375 - 20 UNEF | 0.31 | 0.75 | 1.187 |
| 08 | 1.250 - 18 UNEF | 0.37 | 1.00 | 1.500 |
| 10 | 1.5625 - 18 UNEF | 0.37 | 1.25 | 1.812 |
| 12 | 1.875 - 16 UN | 0.43 | 1.50 | 2.125 |
| 16 | 2.375 - 16 UN | 0.43 | 2.00 | 2.625 |
| 20 | 2.875 - 16 UN | 0.43 | 2.50 | 3.125 |
| 24 | 3.375 - 16 UN | 0.43 | 3.00 | 3.625 |

TABLE II. MIL-C-5015 connector code.

| CONN CODE | MFR | CLASS | SERIES |
|---|---|---|---|
| A | ALL MFR | | MS-SERIES BACKSHELL |
| B | AMPHENOL | A | MS3100, MS3101, MS3106, 97-3100, 97-3101, 97-3106 |
| C | AMPHENOL | E&R | MS3100, MS3101, MS3106, 69-3100, 69-3101, 69-3106 |
| D | BENDIX | A,E,&R | MS3100, MS3101, MS3106, 10-214, 10-720, 10-721, 10-726 |
| E | CANNON | A | MS3100, MS3101, MS3106, CA3101, CA-3106 |
| F | CANNON | E&R | MS3100, MS3101, MS3106 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

TABLE III. A-THREAD code and adapter dimensions.

| A THD CODE | CONN SHELL SIZE | CONNECTOR CODE (SEE TABLE II) | A THREAD (CLASS 2B) | H ±.02 | D DIA ±.02 | E DIA ±.02 | J (STYLE 01)* ±.03 |
|---|---|---|---|---|---|---|---|
| 01 | 8S | D | 0.375 - 32 UNEF | 0.18 | 0.50 | 0.28 | 0.50 |
| 02 | 8S | B | 0.4375 - 27 UNS | 0.21 | 0.56 | 0.34 | 0.53 |
| 03 | 8 | C,E,F | 0.4375 - 28 UNEF | 0.21 | 0.56 | 0.34 | 0.53 |
| 04 | 8S | A | 0.500 - 28 UNEF | 0.21 | 0.62 | 0.37 | 0.56 |
| 04 | 10S | A,B,C,D,F | 0.500 - 28 UNEF | 0.21 | 0.62 | 0.37 | 0.56 |
| 05 | 10S | E | 0.5625 - 24 UNEF | 0.25 | 0.68 | 0.45 | 0.59 |
| 05 | 10SL | E,F | 0.5625 - 24 UNEF | 0.25 | 0.68 | 0.45 | 0.59 |
| 06 | 10SL | A,B,C,D | 0.625 - 24 UNEF | 0.25 | 0.75 | 0.50 | 0.62 |
| 06 | 12,12S | A,D,F | 0.625 - 24 UNEF | 0.25 | 0.75 | 0.50 | 0.62 |
| 07 | 12,12S | B,C,E | 0.6875 - 24 UNEF | 0.25 | 0.81 | 0.57 | 0.65 |
| 08 | 12SL | A | 0.750 - 20 UNEF | 0.28 | 0.87 | 0.62 | 0.68 |
| 08 | 14,14S | A,B,C,D,E,F | 0.750 - 20 UNEF | 0.28 | 0.87 | 0.62 | 0.68 |
| 09 | 16,16S | A,B,C,D,E,F | 0.875 - 20 UNEF | 0.28 | 1.00 | 0.75 | 0.71 |
| 10 | 18 | A,B,C,D,E,F | 1.000 - 20 UNEF | 0.28 | 1.12 | 0.87 | 0.75 |
| 11 | 20 | B,D,E,F | 1.125 - 18 UNEF | 0.28 | 1.25 | 1.00 | 0.78 |
| 12 | 20 | C | 1.125 - 24 UNS | 0.28 | 1.25 | 1.00 | 0.78 |
| 13 | 20,22 | A | 1.1875 - 18 UNEF | 0.28 | 1.31 | 1.06 | 0.81 |
| 14 | 22 | B,C,D,E,F | 1.250 - 18 UNEF | 0.28 | 1.37 | 1.12 | 0.87 |
| 15 | 24 | B,C,D,E,F | 1.375 - 18 UNEF | 0.28 | 1.50 | 1.25 | 1.00 |
| 16 | 24,28 | A | 1.4375 - 18 UNEF | 0.28 | 1.56 | 1.31 | 1.06 |
| 17 | 28 | B,C,D,E,F | 1.625 - 18 UNEF | 0.28 | 1.75 | 1.50 | 1.12 |
| 18 | 32 | A | 1.750 - 18 UNS | 0.28 | 1.87 | 1.62 | 1.18 |
| 19 | 32 | D,E,F | 1.875 - 16 UN | 0.28 | 2.00 | 1.75 | 1.25 |
| 20 | 32 | B,C | 1.9063 - 18 | 0.28 | 2.03 | 1.78 | 1.28 |
| 21 | 36 | A | 2.000 - 18 UNS | 0.28 | 2.12 | 1.87 | 1.34 |
| 22 | 36 | D | 2.0625 - 16 UNS | 0.31 | 2.18 | 1.93 | 1.37 |
| 23 | 36 | C | 2.0625 - 20 | 0.28 | 2.18 | 1.93 | 1.37 |
| 24 | 36 | E,F | 2.125 - 16 UN | 0.31 | 2.25 | 2.00 | 1.40 |
| 25 | 36 | B | 2.125 - 18 | 0.28 | 2.25 | 2.00 | 1.40 |
| 26 | 40 | A | 2.250 - 16 UN | 0.31 | 2.37 | 2.12 | 1.50 |
| 27 | 40 | D | 2.3125 - 16 UNS | 0.31 | 2.43 | 2.18 | 1.56 |
| 28 | 40 | B,E,F | 2.375 - 16 UN | 0.31 | 2.50 | 2.25 | 1.62 |
| 29 | 44 | B,F | 2.625 - 16 UN | 0.31 | 2.75 | 2.50 | 1.87 |
| 30 | 48 | F | 2.8125 - 18 | 0.28 | 2.93 | 2.68 | 2.06 |
| 31 | 48 | B | 2.875 - 16 UN | 0.31 | 3.00 | 2.75 | 2.12 |


*FOR STYLE 02, J DIMENSION IS ZERO.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.

**NOTES:**
1. The M247584/9 adapter couples MIL-C-5015 connectors (MS3100, MS3101, MS3106, and MS-SERIES backshells) to M24758/2, M24758/3 or M24758/4 fittings.
2. For MIL-C-5015, MS3400 SERIES, the M24758/13 adapter may be used.
3. Dimensions are in inches.
4. Dimensions and configurations: See figure 1 and tables I, and III.
5. Material, finish and markings: See MIL-C-24758 (SH).

**Part or Identifying Number (PIN) Example:**

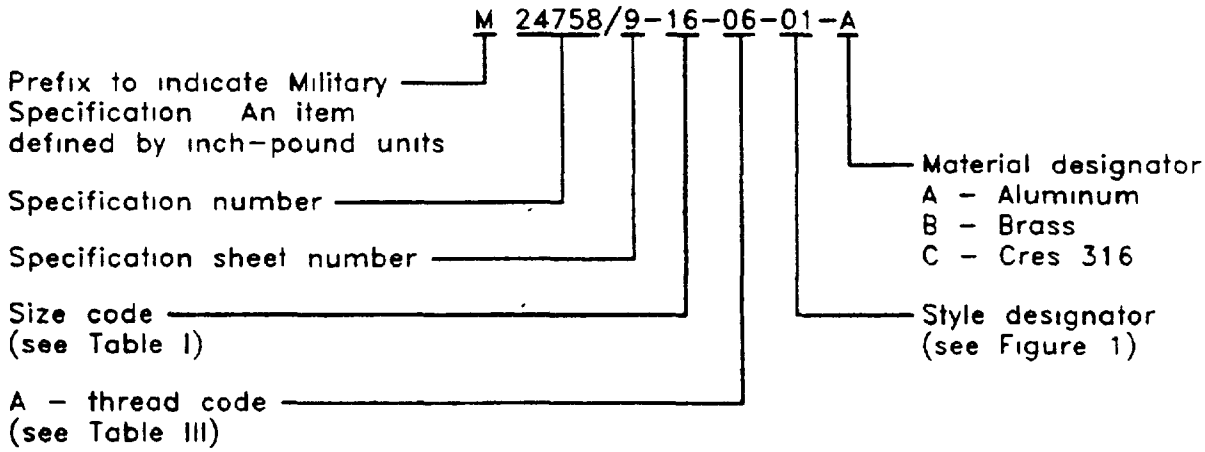


Preparing Activity:
Navy - SH
(Project 5975-N651-9)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:47Z
Check the source to verify that this is the current version before use.