MIL-C-23020/7B(EC)
3 June 1968
SUPERSEDING
MIL-C-23020/7A(SHIPS)
20 June 1966

MILITARY SPECIFICATION SHEET

CABLE, COAXIAL (SUBMARINE USE) TYPE RG-17A/U(USN)

The complete requirements for procuring cable described herein shall consist of this document and the latest issue of MIL-C-23020(SHIPS).

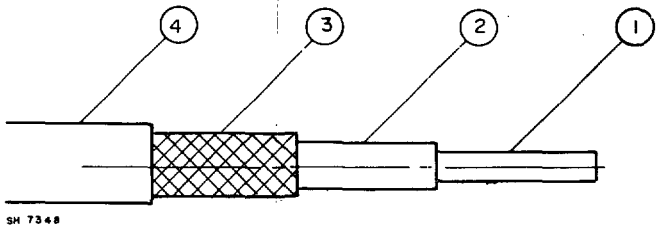

Description	Constructional details
Ⓑ (1) Inner conductor	Bare copper wire, nominal diameter 0.188 inch.
(2) Cable core	Solid, type A. Overall diameter 0.680 0.015 inch. Conductor off center 5 percent of core radius, maximum.
(3) Outer conductor	Single braid, AWG size 30 bare copper wire. Overall diameter 0.760 inch maximum.
(4) Jacket	Type IIa of MIL-C-17. Overall diameter 0.870 ± 0.015 inch.

	Alternate	Alternate
Carriers - 24	36	48
Ends - 14	9	
Picks/inch - 3.1 ± 10 percent	4.0 ± 10 percent	5.6 ± 10 percent

Requirements

Dielectric strength	-	22,000 volts, r.m.s., minimum.
Corona	-	11,000 volts r.m.s., minimum.
Attenuation	-	2.8 db/100 ft. maximum at 400 mc. 11.0 db/100 ft. maximum at 3,000 mc.
Impedance	-	52 ± 2 ohms.

Tests

Hydostatic leakage and abrasion tests are not required.

Preparing activity:
Navy - EC
(Project 6145-N054)

Ⓑ Denotes change.

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:16Z
Check the source to verify that this is the current version before use.