[INCH−POUND]
A−A−59832/8B
18 July 2024
SUPERSEDING
A−A−59832/8A
28 November 2019


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

EXTRACTOR, ELECTRICAL CARD, METAL, NON−LOCKING, SINGLE−SIDED ACTUATION, NARROW PROFILE, STRAIGHT ACTUATING HANDLE, WITH RELEASE TAB, FOR .032, .063, .094, .125, AND .156 INCH THICK CIRCUIT CARD ASSEMBLIES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring extractors described herein shall consist of this document and the latest issue in effect of A−A−59832.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES herein).

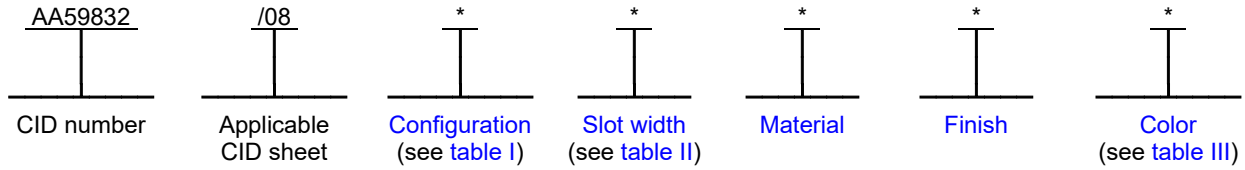

Example: AA59832/08S21AY is the PIN for a right handed, straight handle with release tab, aluminum (alloy 6061) extractor designed for mounting on a circuit card assembly with a printed board thickness of .063 inch (1.60 mm) in width. The corrosion protection finish is yellow anodize with a contrasting color SED symbol on the handle.

SALIENT CHARACTERISTICS.

Performance. Extractors shall be capable of initiating the removal of a circuit card assembly from its installed position. The mechanical advantage of all extractor configurations on this CID specification sheet is approximately 4.2:1.

Interface and physical dimensions. The extractors supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A−A−59832.

Configuration. The configuration of an extractor shall be as specified in table I and on figures 1 through 6.

TABLE I. Configurations.

Configuration	Applicable figures	Extractor description
K	1 and 2	Left hand with SED symbol on the straight handle
L	1	Left hand with straight handle
M	3	Left hand with bent leg and straight handle
N	3 and 4	Left hand with bent leg and SED symbol on the straight handle
P	4 and 5	Right hand with bent leg and SED symbol on the straight handle
Q	5	Right hand with bent leg and straight handle
R	6	Right hand with straight handle
S	6 and 2	Right hand with SED symbol on the straight handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Slot width. The available slot widths needed to accommodate various printed board thicknesses for the extractors covered by this CID specification sheet are specified in table II. The slot width designator shall be included in the PIN.

TABLE II. Slot width configurations and dimensions. 1/

Slot width designator	Slot width dimension "A" 2/ Inch (mm)	Accommodates printed board thickness Inch (mm)	Roll pin width Inch (mm)	Handle width dimension "B" 2/ Inch (mm)
1	.040 (1.02)	.032 (0.8)	.187 (4.75)	.25 (6.4)
2	.075 (2.03)	.063 (1.6)	.187 (4.75)	
3	.105 (2.79)	.094 (2.4)	.250 (6.35)	
4	.142 (3.56)	.125 (3.2)	.250 (6.35)	.29 (7.4)
5	.165 (4.19)	.156 (4.0)	.312 (7.94)	

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.
2/ Tolerance shall be as specified on the applicable figure (see figures 1, 3, 5, and 6).

Material. The material used in the extractor body shall be as specified in A-A-59832. The applicable material type designators for this CID specification sheet are "1" (aluminum alloy 6061, temper T6), "2" (aluminum alloy 5052, temper H32), or "7" (Stainless steel, type 301, 302 or 304). The material designator shall be included in the PIN.

Material thickness. The aluminum thickness shall be .063 ±.003 inch (1.60 ±0.076 mm). The stainless steel thickness shall be .060 ±.002 inch (1.58 ±0.05 mm).

Roll pin. A stainless steel roll pin is furnished with each extractor. The roll pin is .09375 inch (2.38 mm) diameter by the lengths specified in table II.


Finish. The finish designator shall be as specified in A-A-59832. The finishes available for this CID specification sheet are as follows: "A" (anodize), "D" (thick chemical film for maximum corrosion protection), "L" or "M" (thinner chemical film for improved electrical conductivity with corrosion protection, hereafter referred to as "low resistance chemical film") for extractors fabricated of aluminum alloys and "P" (passivation treatment) extractors fabricated of stainless steel.

Color. The color designator shall be as specified in A-A-59832. The colors available for this CID specification sheet shall be "C" (clear) or "G" (gold) for chemical film and "C" (clear) for passivation treatment. The color of anodized extractors shall be specified in table III. The color designator shall be included in the PIN.

TABLE III. Colors of anodized extractors.

Designator	Color	Designator	Color
B	Black	R	Red
C	Clear	U	Blue
D	Green	V	Violet (purple)
E	Gray	W	Brown
F	Orange	Y	Yellow

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

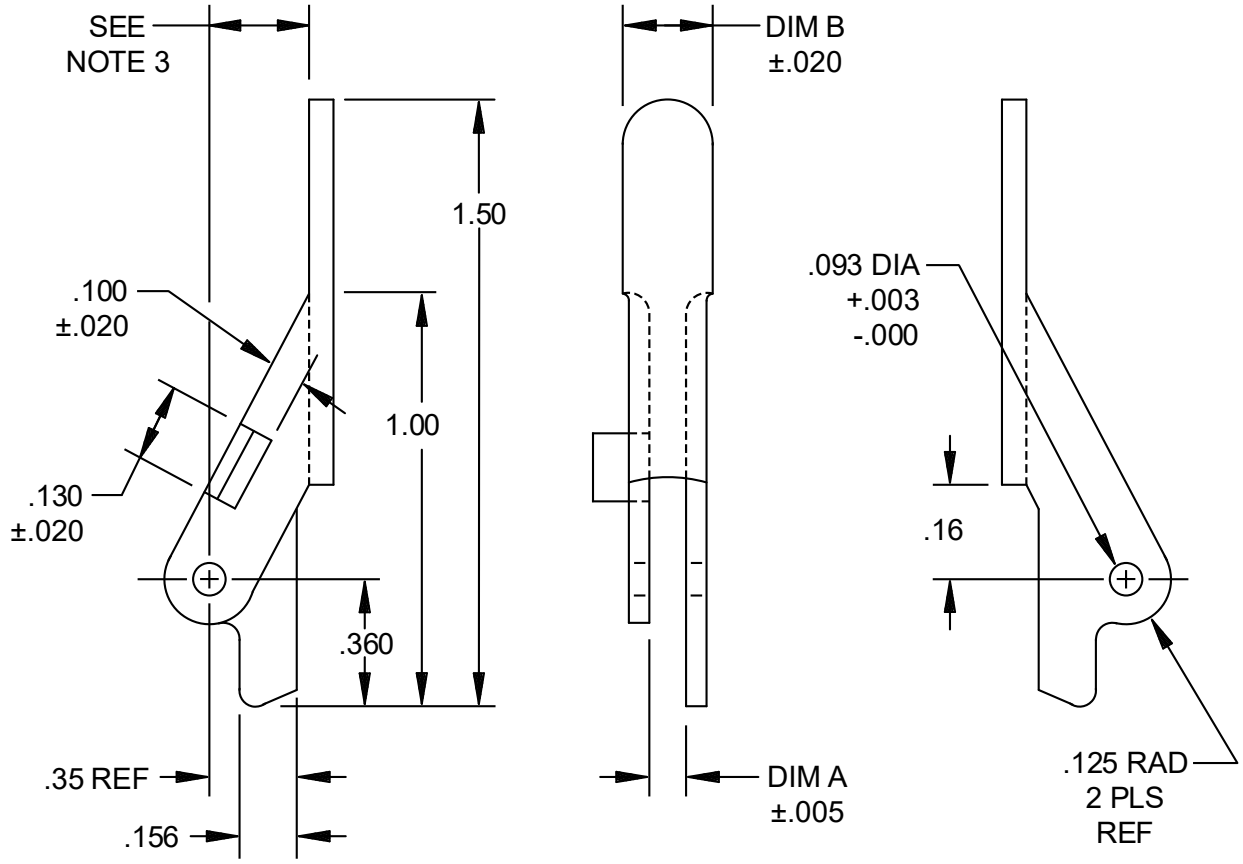


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.125	3.18	.16	4.06	.360	9.14
.005	0.13	.093	2.36	.156	3.96	.18	4.57	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 1. Configuration L dimensions (left hand).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

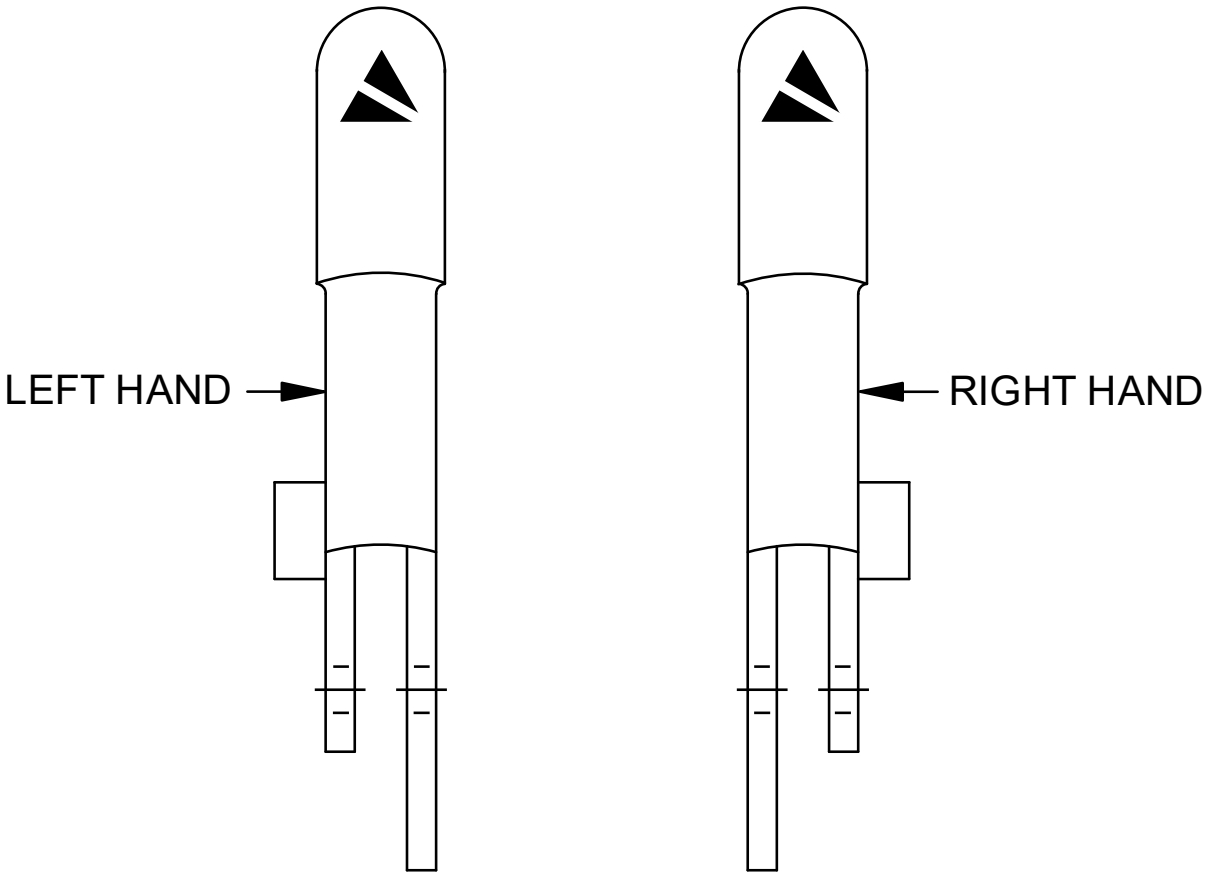

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A-A-59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A-A-59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 2. Configurations K and S with SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

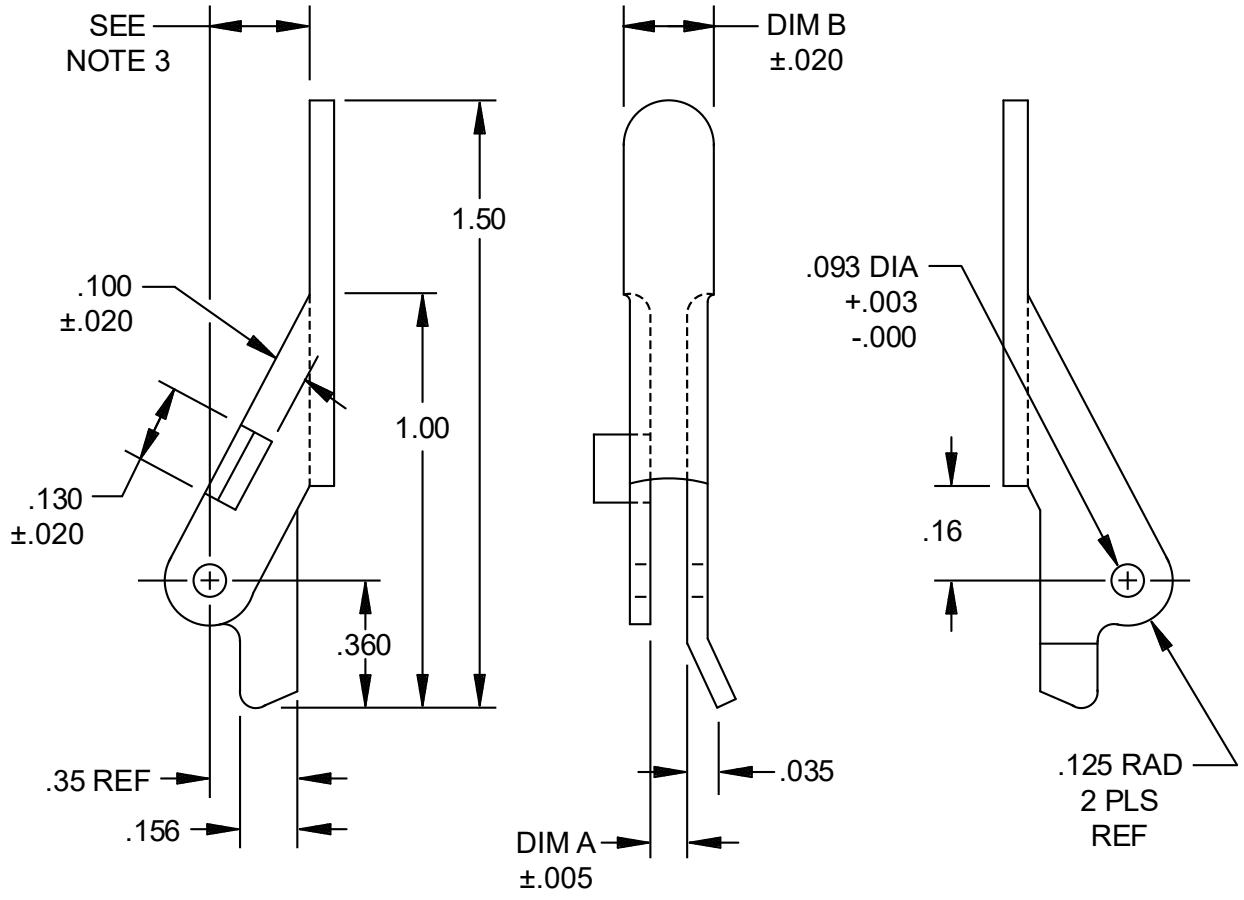


Inches	Mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.156	3.96	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.16	4.06	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 3. Configuration M dimensions (left hand with bent leg).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

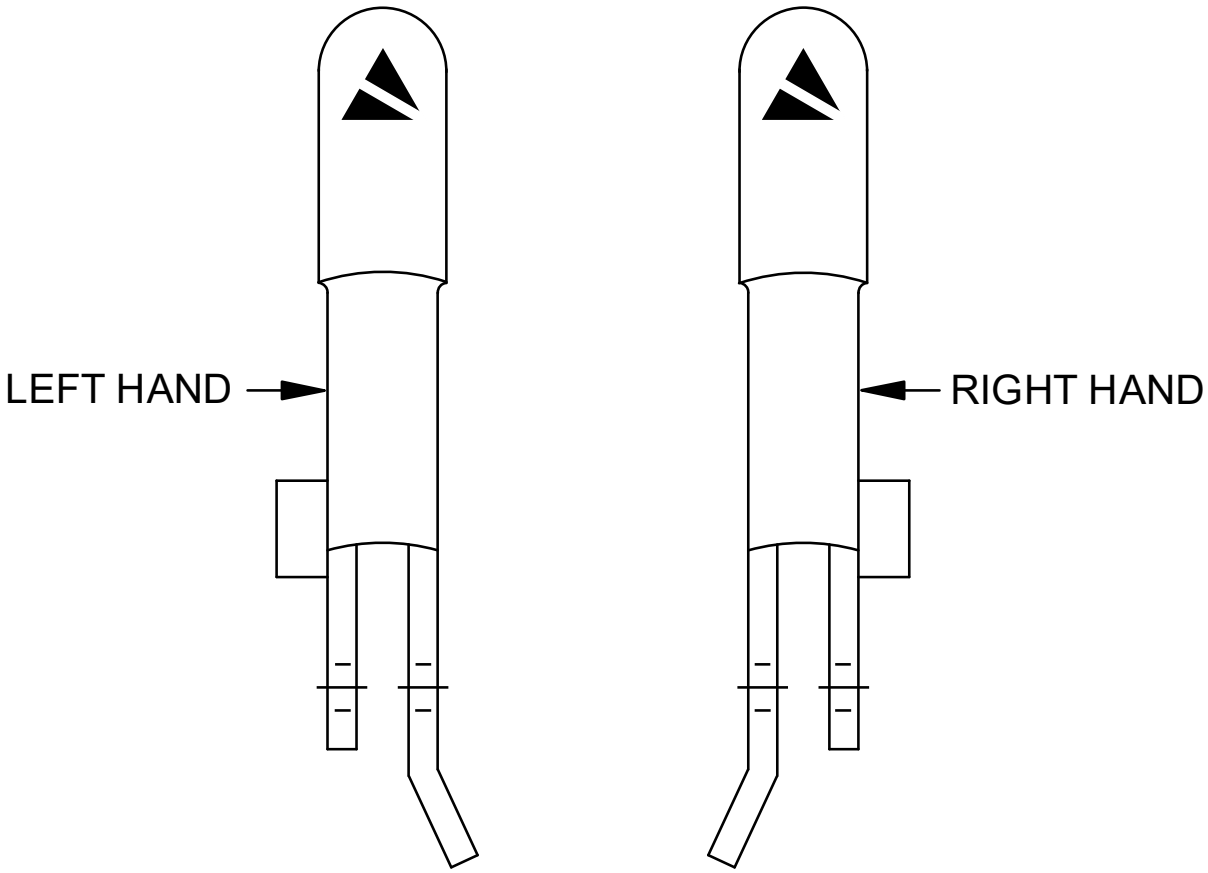

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A−A−59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A−A−59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 4. Configurations N and P with bent leg and SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

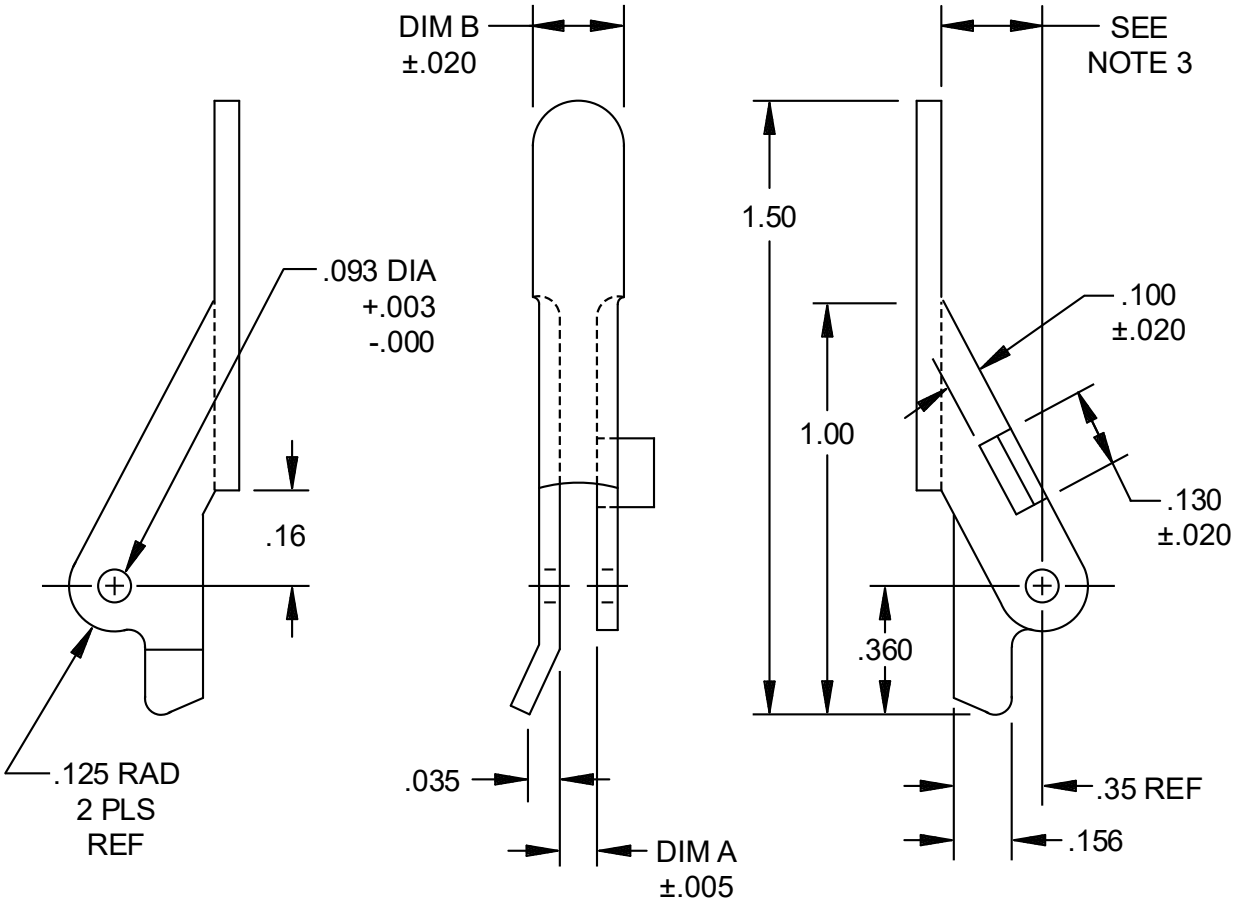


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.156	3.89	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.16	4.06	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 5. Configuration Q dimensions (right hand with bent leg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

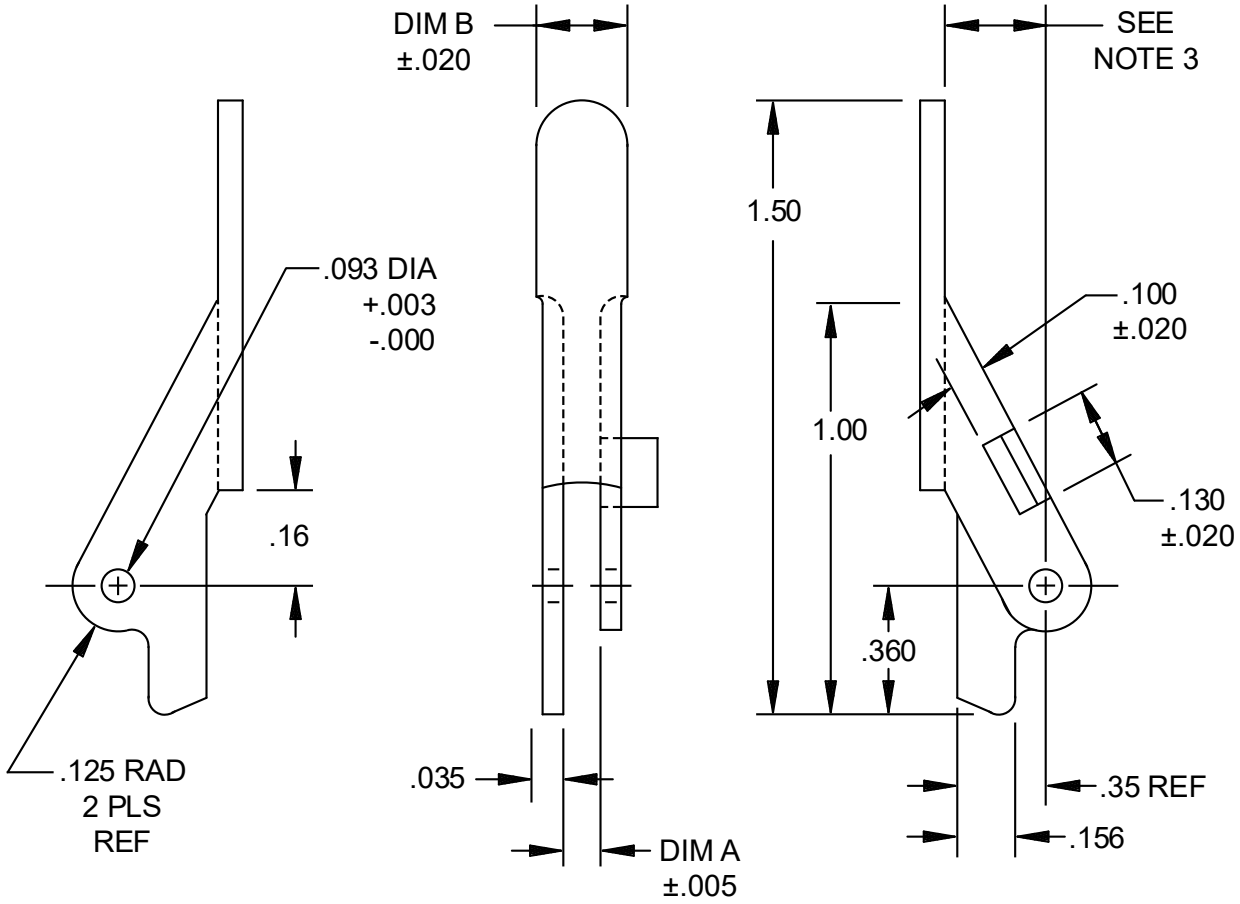

BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.156	3.89	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.16	4.06	1.00	25.4
						.35	8.89	1.50	38.1


NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 61081 and CAGE 5GB68.

FIGURE 6. Configuration R dimensions (right hand).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

APPLICATION DATA.

Extractor orientation with circuit card assembly printed board. Figures 7 and 8 show the extractor mounted to a circuit card assembly and installed into a lever actuated card guide from different views. Figure 7 depicts one straight on and two angled views of a right hand extractor fastened to the printed board of a circuit card assembly. Figure 8 depicts a right side view of a circuit card assembly with a right hand extractor fastened to the printed board.

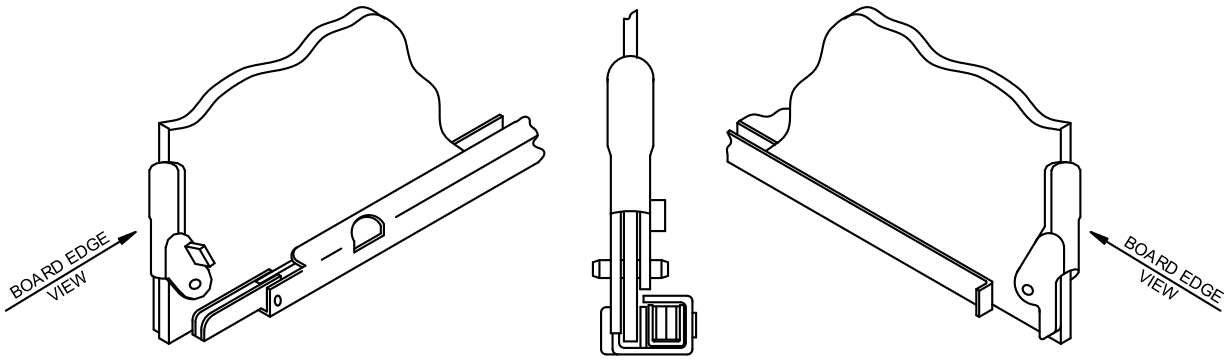

VIEW OF RIGHT HAND EXTRACTOR WITH TAB FROM BOTH SIDES OF CCA PRINTED BOARD

FIGURE 7. Extractor fastened to circuit card assembly (right hand extractor shown).


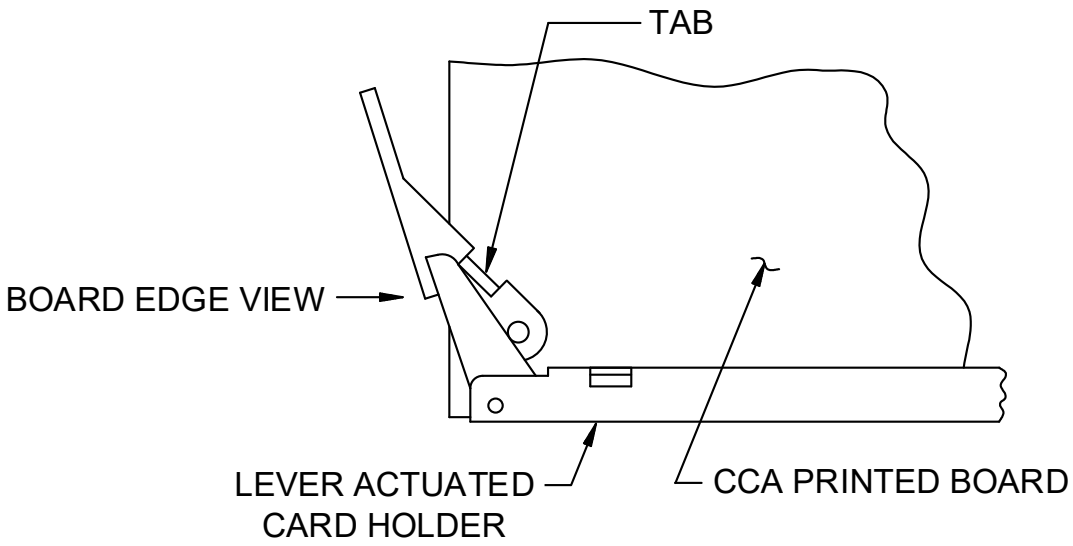


FIGURE 8. Circuit card assembly to card guide view (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card positioning in relation to actuating surface. Two positions of a circuit card assembly edge to a locking card guide when seated in the connector are shown on figure 9. The circuit card assembly is ejected from its installed position by lever action of the extractor against the release tab on a locking card guide (shown) or actuating surface of a card cage. The extractor will allow .030 inch (0.8 mm) over travel for tolerance take-up. Two extractors mounted on each circuit card assembly is recommended.

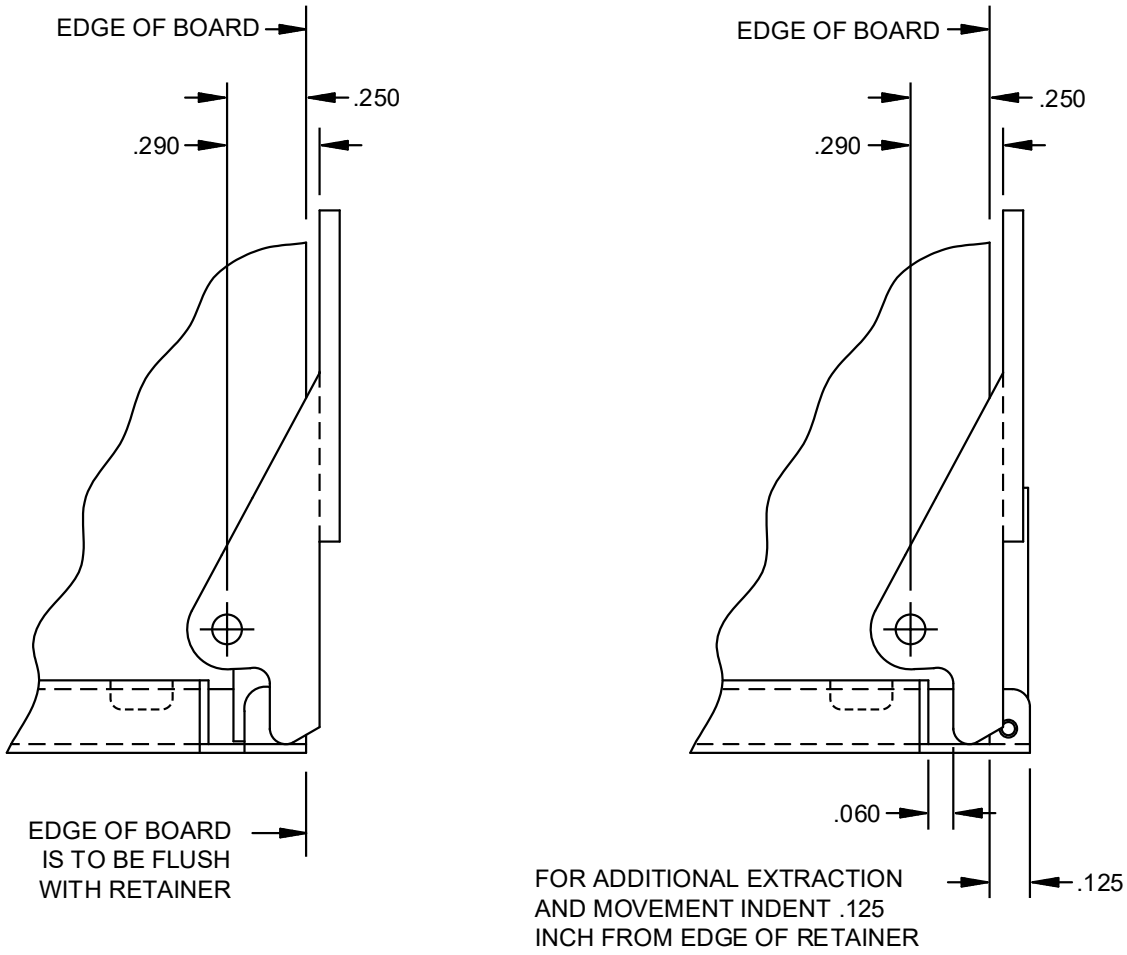


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.060	1.52	.125	3.18	.250	6.35	.290	7.37

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 9. Circuit card assembly to card guide dimensions (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card assembly printed board. The circuit card assembly should be designed so that electronic components on the printed board in the area around the extractor mounting hole have sufficient clearance for extractor rotation as shown on figure 10.

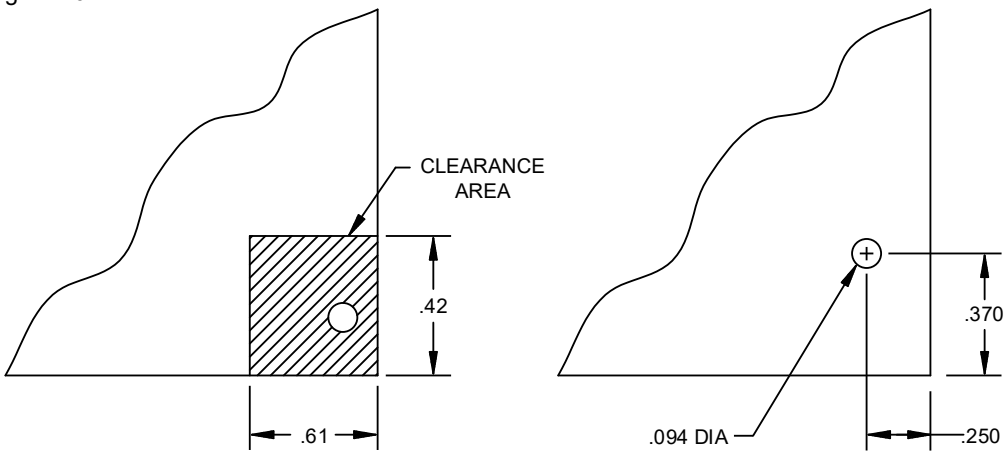

ELECTRONIC COMPONENT CLEARANCE ZONE REQUIRED TO ACCOMODATE MOUNTING AND ROTATION OF EXTRACTOR (LEG SIDE SHOWN)

PRINTED BOARD MOUNTING DIMENSIONS

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.094	2.39	.250	6.35	.370	9.40	.42	10.67	.61	15.49

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 10. Printed board clearance zone and mounting hole dimensions.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A−A−59832 − Extractor, Electrical Card, Metal, General Requirements For.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Ordering data. Ordering data is as specified in A−A−59832.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806-1231	Telephone: (714) 738-6194 Facsimile: (714) 446-0119 E-mail: sales@accrmfg.com URL: www.accrmfg.com
61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121-3410	Telephone: (800) 854-7086 Facsimile: (858) 740-2430 E-mail: schroff.us@pentair.com URL: www.nvent.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturer's P/Ns as shown in tables IV, V, and VI, This CID specification sheet PINs also supersedes those DESC Drawing 84191 PINs as shown in table VII. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
K11AR 3/	1119S-1LRATE	S71T6-1-L-A-1-E	
K21AR 3/	1119S-2LRATE	S71T6-2-L-A-1-E	
K31AR 3/	1119S-3LRATE	S71T6-3-L-A-1-E	
K41AR 3/	1119S-4LRATE	S71T6-4-L-A-1-E	
K51AR 3/	1119S-5LRATE	S71T6-5-L-A-1-E	
K11DG 4/	1119S-1LCGTE	S71T6-1-L-A-E	
K21DG 4/	1119S-2LCGTE	S71T6-2-L-A-E	
K31DG 4/	1119S-3LCGTE	S71T6-3-L-A-E	
K41DG 4/	1119S-4LCGTE	S71T6-4-L-A-E	
K51DG 4/	1119S-5LCGTE	S71T6-5-L-A-E	
L11AR 3/	1119S-1LRAT	S71T6-1-L-A-1	
L21AR 3/	1119S-2LRAT	S71T6-2-L-A-1	
L31AR 3/	1119S-3LRAT	S71T6-3-L-A-1	
L41AR 3/	1119S-4LRAT	S71T6-4-L-A-1	
L51AR 3/	1119S-5LRAT	S71T6-5-L-A-1	
L11DG 4/	1119S-1LCGT	S71T6-1-L-A	
L21DG 4/	1119S-2LCGT	S71T6-2-L-A	
L31DG 4/	1119S-3LCGT	S71T6-3-L-A	
L41DG 4/	1119S-4LCGT	S71T6-4-L-A	
L51DG 4/	1119S-5LCGT	S71T6-5-L-A	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors - Continued.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
M11AR 3/	1119S-1LRATD	S71T6-1-L-A-1-BL	
M21AR 3/	1119S-2LRATD	S71T6-2-L-A-1-BL	
M31AR 3/	1119S-3LRATD	S71T6-3-L-A-1-BL	
M41AR 3/	1119S-4LRATD	S71T6-4-L-A-1-BL	
M51AR 3/	1119S-5LRATD	S71T6-5-L-A-1-BL	
M11DG 4/	1119S-1LCGTD	S71T6-1-L-A-BL	
M21DG 4/	1119S-2LCGTD	S71T6-2-L-A-BL	
M31DG 4/	1119S-3LCGTD	S71T6-3-L-A-BL	
M41DG 4/	1119S-4LCGTD	S71T6-4-L-A-BL	
M51DG 4/	1119S-5LCGTD	S71T6-5-L-A-BL	
N11AR 3/	1119S-1LRATDE	S71T6-1-L-A-1-BL-E	
N21AR 3/	1119S-2LRATDE	S71T6-2-L-A-1-BL-E	
N31AR 3/	1119S-3LRATDE	S71T6-3-L-A-1-BL-E	
N41AR 3/	1119S-4LRATDE	S71T6-4-L-A-1-BL-E	
N51AR 3/	1119S-5LRATDE	S71T6-5-L-A-1-BL-E	
N11DG 4/	1119S-1LCGTDE	S71T6-1-L-A-BL-E	
N21DG 4/	1119S-2LCGTDE	S71T6-2-L-A-BL-E	
N31DG 4/	1119S-3LCGTDE	S71T6-3-L-A-BL-E	
N41DG 4/	1119S-4LCGTDE	S71T6-4-L-A-BL-E	
N51DG 4/	1119S-5LCGTDE	S71T6-5-L-A-BL-E	
P11AR 3/	1119S-1RRATDE	S71T6-1-R-A-1-BL-E	
P21AR 3/	1119S-2RRATDE	S71T6-2-R-A-1-BL-E	
P31AR 3/	1119S-3RRATDE	S71T6-3-R-A-1-BL-E	
P41AR 3/	1119S-4RRATDE	S71T6-4-R-A-1-BL-E	
P51AR 3/	1119S-5RRATDE	S71T6-5-R-A-1-BL-E	
P11DG 4/	1119S-1RCGTDE	S71T6-1-R-A-BL-E	
P21DG 4/	1119S-2RCGTDE	S71T6-2-R-A-BL-E	
P31DG 4/	1119S-3RCGTDE	S71T6-3-R-A-BL-E	
P41DG 4/	1119S-4RCGTDE	S71T6-4-R-A-BL-E	
P51DG 4/	1119S-5RCGTDE	S71T6-5-R-A-BL-E	
Q11AR 3/	1119S-1RRATD	S71T6-1-R-A-1-BL	
Q21AR 3/	1119S-2RRATD	S71T6-2-R-A-1-BL	
Q31AR 3/	1119S-3RRATD	S71T6-3-R-A-1-BL	
Q41AR 3/	1119S-4RRATD	S71T6-4-R-A-1-BL	
Q51AR 3/	1119S-5RRATD	S71T6-5-R-A-1-BL	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors - Continued.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
Q11DG 4/	1119S-1RCGTD	S71T6-1-R-A-BL	
Q21DG 4/	1119S-2RCGTD	S71T6-2-R-A-BL	
Q31DG 4/	1119S-3RCGTD	S71T6-3-R-A-BL	
Q41DG 4/	1119S-4RCGTD	S71T6-4-R-A-BL	
Q51DG 4/	1119S-5RCGTD	S71T6-5-R-A-BL	
R11AR 3/	1119S-1RRAT	S71T6-1-R-A-1	
R21AR 3/	1119S-2RRAT	S71T6-2-R-A-1	
R31AR 3/	1119S-3RRAT	S71T6-3-R-A-1	
R41AR 3/	1119S-4RRAT	S71T6-4-R-A-1	
R51AR 3/	1119S-5RRAT	S71T6-5-R-A-1	
R11DG 4/	1119S-1RCGT	S71T6-1-R-A	
R21DG 4/	1119S-2RCGT	S71T6-2-R-A	
R31DG 4/	1119S-3RCGT	S71T6-3-R-A	
R41DG 4/	1119S-4RCGT	S71T6-4-R-A	
R51DG 4/	1119S-5RCGT	S71T6-5-R-A	
S11AR 3/	1119S-1RRATE	S71T6-1-R-A-1-E	
S21AR 3/	1119S-2RRATE	S71T6-2-R-A-1-E	
S31AR 3/	1119S-3RRATE	S71T6-3-R-A-1-E	
S41AR 3/	1119S-4RRATE	S71T6-4-R-A-1-E	
S51AR 3/	1119S-5RRATE	S71T6-5-R-A-1-E	
S11DG 4/	1119S-1RCGTE	S71T6-1-R-A-E	
S21DG 4/	1119S-2RCGTE	S71T6-2-R-A-E	
S31DG 4/	1119S-3RCGTE	S71T6-3-R-A-E	
S41DG 4/	1119S-4RCGTE	S71T6-4-R-A-E	
S51DG 4/	1119S-5RCGTE	S71T6-5-R-A-E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The finish and color designators for the PINs listed are either for red anodize (CID finish and color codes AR) or gold thick chemical film (CID finish and color codes DG).

3/ See table III for the finish color designators for the other 9 anodize colors available.

4/ Low resistance chemical film finishes are also available in clear (CID finish and color codes LC) and gold (CID finish and color codes MG).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
K12AB 3/	1109A-1LBATE	S71-1-L-A-5-E	
K22AB 3/	1109A-2LBATE	S71-2-L-A-5-E	
K32AB 3/	1109A-3LBATE	S71-3-L-A-5-E	
K42AB 3/	1109A-4LBATE	S71-4-L-A-5-E	
K52AB 3/	1109A-5LBATE	S71-5-L-A-5-E	
K12LC 4/	1109A-1LCCTE	S71-1-L-A-CC3-E	
K22LC 4/	1109A-2LCCTE	S71-2-L-A-CC3-E	
K32LC 4/	1109A-3LCCTE	S71-3-L-A-CC3-E	
K42LC 4/	1109A-4LCCTE	S71-4-L-A-CC3-E	
K52LC 4/	1109A-5LCCTE	S71-5-L-A-CC3-E	
L12AB 3/	1109A-1LBAT	S71-1-L-A-5	
L22AB 3/	1109A-2LBAT	S71-2-L-A-5	
L32AB 3/	1109A-3LBAT	S71-3-L-A-5	
L42AB 3/	1109A-4LBAT	S71-4-L-A-5	
L52AB 3/	1109A-5LBAT	S71-5-L-A-5	
L12LC 4/	1109A-1LCCT	S71-1-L-A-CC3	
L22LC 4/	1109A-2LCCT	S71-2-L-A-CC3	
L32LC 4/	1109A-3LCCT	S71-3-L-A-CC3	
L42LC 4/	1109A-4LCCT	S71-4-L-A-CC3	
L52LC 4/	1109A-5LCCT	S71-5-L-A-CC3	
M12AB 3/	1109A-1LBATD	S71-1-L-A-5-BL	
M22AB 3/	1109A-2LBATD	S71-2-L-A-5-BL	
M32AB 3/	1109A-3LBATD	S71-3-L-A-5-BL	
M42AB 3/	1109A-4LBATD	S71-4-L-A-5-BL	
M52AB 3/	1109A-5LBATD	S71-5-L-A-5-BL	
M12LC 4/	1109A-1LCCTD	S71-1-L-A-CC3-BL	
M22LC 4/	1109A-2LCCTD	S71-2-L-A-CC3-BL	
M32LC 4/	1109A-3LCCTD	S71-3-L-A-CC3-BL	
M42LC 4/	1109A-4LCCTD	S71-4-L-A-CC3-BL	
M52LC 4/	1109A-5LCCTD	S71-5-L-A-CC3-BL	
N12AB 3/	1109A-1LBATDE	S71-1-L-A-5-BL-E	
N22AB 3/	1109A-2LBATDE	S71-2-L-A-5-BL-E	
N32AB 3/	1109A-3LBATDE	S71-3-L-A-5-BL-E	
N42AB 3/	1109A-4LBATDE	S71-4-L-A-5-BL-E	
N52AB 3/	1109A-5LBATDE	S71-5-L-A-5-BL-E	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors - Continued.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
N12LC 4/	1109A-1LCCTDE	S71-1-L-A-CC3-BL-E	
N22LC 4/	1109A-2LCCTDE	S71-2-L-A-CC3-BL-E	
N32LC 4/	1109A-3LCCTDE	S71-3-L-A-CC3-BL-E	
N42LC 4/	1109A-4LCCTDE	S71-4-L-A-CC3-BL-E	
N52LC 4/	1109A-5LCCTDE	S71-5-L-A-CC3-BL-E	
P12AB 3/	1109A-1RBATDE	S71-1-R-A-5-BL-E	
P22AB 3/	1109A-2RBATDE	S71-2-R-A-5-BL-E	
P32AB 3/	1109A-3RBATDE	S71-3-R-A-5-BL-E	
P42AB 3/	1109A-4RBATDE	S71-4-R-A-5-BL-E	
P52AB 3/	1109A-5RBATDE	S71-5-R-A-5-BL-E	
P12LC 4/	1109A-1RCCTDE	S71-1-R-A-CC3-BL-E	
P22LC 4/	1109A-2RCCTDE	S71-2-R-A-CC3-BL-E	
P32LC 4/	1109A-3RCCTDE	S71-3-R-A-CC3-BL-E	
P42LC 4/	1109A-4RCCTDE	S71-4-R-A-CC3-BL-E	
P52LC 4/	1109A-5RCCTDE	S71-5-R-A-CC3-BL-E	
Q12AB 3/	1109A-1RBATD	S71-1-R-A-5-BL	
Q22AB 3/	1109A-2RBATD	S71-2-R-A-5-BL	
Q32AB 3/	1109A-3RBATD	S71-3-R-A-5-BL	
Q42AB 3/	1109A-4RBATD	S71-4-R-A-5-BL	
Q52AB 3/	1109A-5RBATD	S71-5-R-A-5-BL	
Q12LC 4/	1109A-1RCCTD	S71-1-R-A-CC3-BL	
Q22LC 4/	1109A-2RCCTD	S71-2-R-A-CC3-BL	
Q32LC 4/	1109A-3RCCTD	S71-3-R-A-CC3-BL	
Q42LC 4/	1109A-4RCCTD	S71-4-R-A-CC3-BL	
Q52LC 4/	1109A-5RCCTD	S71-5-R-A-CC3-BL	
R12AB 3/	1109A-1RBAT	S71-1-R-A-5	
R22AB 3/	1109A-2RBAT	S71-2-R-A-5	
R32AB 3/	1109A-3RBAT	S71-3-R-A-5	
R42AB 3/	1109A-4RBAT	S71-4-R-A-5	
R52AB 3/	1109A-5RBAT	S71-5-R-A-5	
R12LC 4/	1109A-1RCCT	S71-1-R-A-CC3	
R22LC 4/	1109A-2RCCT	S71-2-R-A-CC3	
R32LC 4/	1109A-3RCCT	S71-3-R-A-CC3	
R42LC 4/	1109A-4RCCT	S71-4-R-A-CC3	
R52LC 4/	1109A-5RCCT	S71-5-R-A-CC3	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors - Continued.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	
S12AB 3/	1109A-1RBATE	S71-1-R-A-5-E	
S22AB 3/	1109A-2RBATE	S71-2-R-A-5-E	
S32AB 3/	1109A-3RBATE	S71-3-R-A-5-E	
S42AB 3/	1109A-4RBATE	S71-4-R-A-5-E	
S52AB 3/	1109A-5RBATE	S71-5-R-A-5-E	
S12LC 4/	1109A-1RCCTE	S71-1-R-A-CC3-E	
S22LC 4/	1109A-2RCCTE	S71-2-R-A-CC3-E	
S32LC 4/	1109A-3RCCTE	S71-3-R-A-CC3-E	
S42LC 4/	1109A-4RCCTE	S71-4-R-A-CC3-E	
S52LC 4/	1109A-5RCCTE	S71-5-R-A-CC3-E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The finish and color designators for the PINs listed are for clear low resistance chemical film (CID finish-color code LC) or black anodize (CID finish code AB).

3/ See table III for the color designators for the other 9 anodize colors available.

4/ Chemical film finish for maximum corrosion protection is also available in gold (CID finish and color codes DG).

TABLE VI. Commercial part number supersession data for stainless steel extractors.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68		
K17PC	1129S-1LTE		
K27PC	1129S-2LTE		
K37PC	1129S-3LTE		
K47PC	1129S-4LTE		
K57PC	1129S-5LTE		
L17PC	1129S-1LT		
L27PC	1129S-2LT		
L37PC	1129S-3LT		
L47PC	1129S-4LT		
L57PC	1129S-5LT		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VI. Commercial part number supersession data for stainless steel extractors - Continued.

PIN designator AA59832/08	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68		
M17PC	1129S-1LTD		
M27PC	1129S-2LTD		
M37PC	1129S-3LTD		
M47PC	1129S-4LTD		
M57PC	1129S-5LTD		
N17PC	1129S-1LTDE		
N27PC	1129S-2LTDE		
N37PC	1129S-3LTDE		
N47PC	1129S-4LTDE		
N57PC	1129S-5LTDE		
P17PC	1129S-1RTDE		
P27PC	1129S-2RTDE		
P37PC	1129S-3RTDE		
P47PC	1129S-4RTDE		
P57PC	1129S-5RTDE		
Q17PC	1129S-1RTD		
Q27PC	1129S-2RTD		
Q37PC	1129S-3RTD		
Q47PC	1129S-4RTD		
Q57PC	1129S-5RTD		
R17PC	1129S-1RT		
R27PC	1129S-2RT		
R37PC	1129S-3RT		
R47PC	1129S-4RT		
R57PC	1129S-5RT		
S17PC	1129S-1RTE		
S27PC	1129S-2RTE		
S37PC	1129S-3RTE		
S47PC	1129S-4RTE		
S57PC	1129S-5RTE		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The PINs listed are for passivation treatment (CID finish-color code PC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191-17ET	AA59832/08K11DG	84191-18ET	AA59832/08S11DG
84191-17EA	AA59832/08K12DG	84191-18EA	AA59832/08S12DG
84191-17PS	AA59832/08L17PC	84191-18PS	AA59832/08R17PC
84191-17CT	AA59832/08L11DG	84191-18CT	AA59832/08R11DG
84191-17CA	AA59832/08L12DG	84191-18CA	AA59832/08R12DG
84191-17*T 1/	AA59832/08L11A# 2/	84191-18*T 1/	AA59832/08R11A# 2/
84191-17*A 1/	AA59832/08L12A# 2/	84191-18*A 1/	AA59832/08R12A# 2/
84191-17CTBL	AA59832/08M11DG	84191-18CTBL	AA59832/08Q11DG
84191-17CABL	AA59832/08M12DG	84191-18CABL	AA59832/08Q12DG
84191-17*TBL 1/	AA59832/08M11A# 2/	84191-18*TBL 1/	AA59832/08Q11A# 2/
84191-17*ABL 1/	AA59832/08M12A# 2/	84191-18*ABL 1/	AA59832/08Q12A# 2/
84191-17PSBL	AA59832/08M17PC	84191-18PSBL	AA59832/08Q17PC
84191-17ETBL	AA59832/08N11DG	84191-18ETBL	AA59832/08P11DG
84191-17EABL	AA59832/08N12DG	84191-18EABL	AA59832/08P12DG
84191-19ET	AA59832/08K21DG	84191-20ET	AA59832/08S21DG
84191-19EA	AA59832/08K22DG	84191-20EA	AA59832/08S22DG
84191-19PS	AA59832/08L27PC	84191-20PS	AA59832/08R27PC
84191-19CT	AA59832/08L21DG	84191-20CT	AA59832/08R21DG
84191-19CA	AA59832/08L22DG	84191-20CA	AA59832/08R22DG
84191-19*T 1/	AA59832/08L21A# 2/	84191-20*T 1/	AA59832/08R21A# 2/
84191-19*A 1/	AA59832/08L22A# 2/	84191-20*A 1/	AA59832/08R22A# 2/
84191-19CTBL	AA59832/08M21DG	84191-20CTBL	AA59832/08Q21DG
84191-19CABL	AA59832/08M22DG	84191-20CABL	AA59832/08Q22DG
84191-19*TBL 1/	AA59832/08M21A# 2/	84191-20*TBL 1/	AA59832/08Q21A# 2/
84191-19*ABL 1/	AA59832/08M22A# 2/	84191-20*ABL 1/	AA59832/08Q22A# 2/
84191-19PSBL	AA59832/08M27PC	84191-20PSBL	AA59832/08Q27PC
84191-19ETBL	AA59832/08N21DG	84191-20ETBL	AA59832/08P21DG
84191-19EABL	AA59832/08N22DG	84191-20EABL	AA59832/08P22DG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information - Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191-21ET	AA59832/08K31DG	84191-22ET	AA59832/08S31DG
84191-21EA	AA59832/08K32DG	84191-22EA	AA59832/08S32DG
84191-21PS	AA59832/08L37PC	84191-22PS	AA59832/08R37PC
84191-21CT	AA59832/08L31DG	84191-22CT	AA59832/08R31D
84191-21CA	AA59832/08L32DG	84191-22CA	AA59832/08R32DG
84191-21*T 1/	AA59832/08L31A# 2/	84191-22*T 1/	AA59832/08R31A# 2/
84191-21*A 1/	AA59832/08L32A# 2/	84191-22*A 1/	AA59832/08R32A# 2/
84191-21CTBL	AA59832/08M31DG	84191-22CTBL	AA59832/08Q31DG
84191-21CABL	AA59832/08M32DG	84191-22CABL	AA59832/08Q32DG
84191-21*TBL 1/	AA59832/08M31A# 2/	84191-22*TBL 1/	AA59832/08Q31A# 2/
84191-21*ABL 1/	AA59832/08M32A# 2/	84191-22*ABL 1/	AA59832/08Q32A# 2/
84191-21PSBL	AA59832/08M37PC	84191-22PSBL	AA59832/08Q37PC
84191-21ETBL	AA59832/08N31DG	84191-22ETBL	AA59832/08P31DG
84191-21EABL	AA59832/08N32DG	84191-22EABL	AA59832/08P32DG
84191-23ET	AA59832/08K41DG	84191-24ET	AA59832/08S41DG
84191-23EA	AA59832/08K42DG	84191-24EA	AA59832/08S42DG
84191-23PS	AA59832/08L47PC	84191-24PS	AA59832/08R47PC
84191-23CT	AA59832/08L41DG	84191-24CT	AA59832/08R41DG
84191-23CA	AA59832/08L42DG	84191-24CA	AA59832/08R42DG
84191-23*T 1/	AA59832/08L41A# 2/	84191-24*T 1/	AA59832/08R41A# 2/
84191-23*A 1/	AA59832/08L42A# 2/	84191-24*A 1/	AA59832/08R42A# 2/
84191-23CTBL	AA59832/08M41DG	84191-24CTBL	AA59832/08Q41DG
84191-23CABL	AA59832/08M42DG	84191-24CABL	AA59832/08Q42DG
84191-23*TBL 1/	AA59832/08M41A# 2/	84191-24*TBL 1/	AA59832/08Q41A# 2/
84191-23*ABL 1/	AA59832/08M42A# 2/	84191-24*ABL 1/	AA59832/08Q42A# 2/
84191-23PSBL	AA59832/08M47PC	84191-24PSBL	AA59832/08Q47PC
84191-23ETBL	AA59832/08N41DG	84191-24ETBL	AA59832/08P41DG
84191-23EABL	AA59832/08N42DG	84191-24EABL	AA59832/08P42DG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information − Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191−37ET	AA59832/08K51DG	84191−38ET	AA59832/08S51DG
84191−37EA	AA59832/08K52DG	84191−38EA	AA59832/08S52DG
84191−37PS	AA59832/08L57PC	84191−38PS	AA59832/08R57PC
84191−37CT	AA59832/08L51DG	84191−38CT	AA59832/08R51DG
84191−37CA	AA59832/08L52DG	84191−38CA	AA59832/08R52DG
84191−37*T 1/	AA59832/08L51A# 2/	84191−38*T 1/	AA59832/08R51A# 2/
84191−37*A 1/	AA59832/08L52A# 2/	84191−38*A 1/	AA59832/08R52A# 2/
84191−37CTBL	AA59832/08M51DG	84191−38CTBL	AA59832/08Q51DG
84191−37CABL	AA59832/08M52DG	84191−38CABL	AA59832/08Q52DG
84191−37*TBL 1/	AA59832/08M51A# 2/	84191−38*TBL 1/	AA59832/08Q51A# 2/
84191−37*ABL 1/	AA59832/08M52A# 2/	84191−38*ABL 1/	AA59832/08Q52A# 2/
84191−37PSBL	AA59832/08M57PC	84191−38PSBL	AA59832/08Q57PC
84191−37ETBL	AA59832/08N51DG	84191−38ETBL	AA59832/08P51DG
84191−37EABL	AA59832/08N52DG	84191−38EABL	AA59832/08P52DG

1/ The asterisk "*" denotes the anodize aluminum finish colors for DESC Drawing 84191.
2/ The pound sign "#" denotes the anodize aluminum finish colors of table III herein.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity:
DLA − CC

Project: 5998−2024−008

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.