MILITARY SPECIFICATION

TRUCK, HAND, SHELF

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a surgical dressing hand truck for use by medical units in the field.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

FF-C-77	Casters, Institutional Duty.
QQ-P-416	Plating, Cadmium (Electrodeposited).
QQ-Z-325	Zinc Coating, Electrodeposited, Requirements for.
TT-C-490	Cleaning Method and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-527	Enamel, Alkyd, Lustreless.
TT-P-636	Primer Coating Alkyd, Wood and Ferrousmetal.
PPP-B-601	Box, Wood, Cleated-Plywood.
PPP-B-621	Box, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Shipping, Fiberboard.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap, Water Vaporproof or Waterproof, Flexible.
MIL-M-7298	Manual, Technical; Commercial Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-66	Steel, Chemical Composition and Hardenability.
FED-STD-151	Metals, Test Methods.
FED-STD-595	Colors.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of Military specifications and standards required by suppliers in connection with specific procurement functions should be obtained as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.


* 3.1.1 Carbon steel. Carbon steel used in fabrication of hand truck parts shall be AISI 1010 or 1020 conforming to FED-STD-66 when tested as specified in 4.4.1.


* 3.1.2 Hardware. Nuts, bolts and split lockwashers shall be of carbon steel, zinc plated and phosphate treated. Screw thread pitch on bolts and nuts shall be selected from the Unified National Coarse series. All nuts shall be hexagon cap-nut style, having a closed rounded end. Nuts shall have sufficient depth to avoid bottoming. Bolts shall be semi-finished hexagon-head type.

* 3.1.3 Casters. Casters shall have an outside diameter of 10 inches and shall be in conformance with FF-C-77, Class C, Style a. Swivel casters shall have ball bearing swivels. Caster stems shall be sized to fit the uprights and shall have clearance holes for bolting to the uprights. Caster forks and wheel disks shall be zinc plated.

3.2 Construction. The surgical dressing hand truck shall be of the knock-down type, that may be readily set up and dismantled by medical units in the field. The truck shall be fabricated from cold rolled steel; and shall consist essentially of four tubular uprights, fitted with casters, two shelves, and an encircling guard rail for each shelf. Construction shall be in accordance with Figure 1, and as hereinafter specified.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

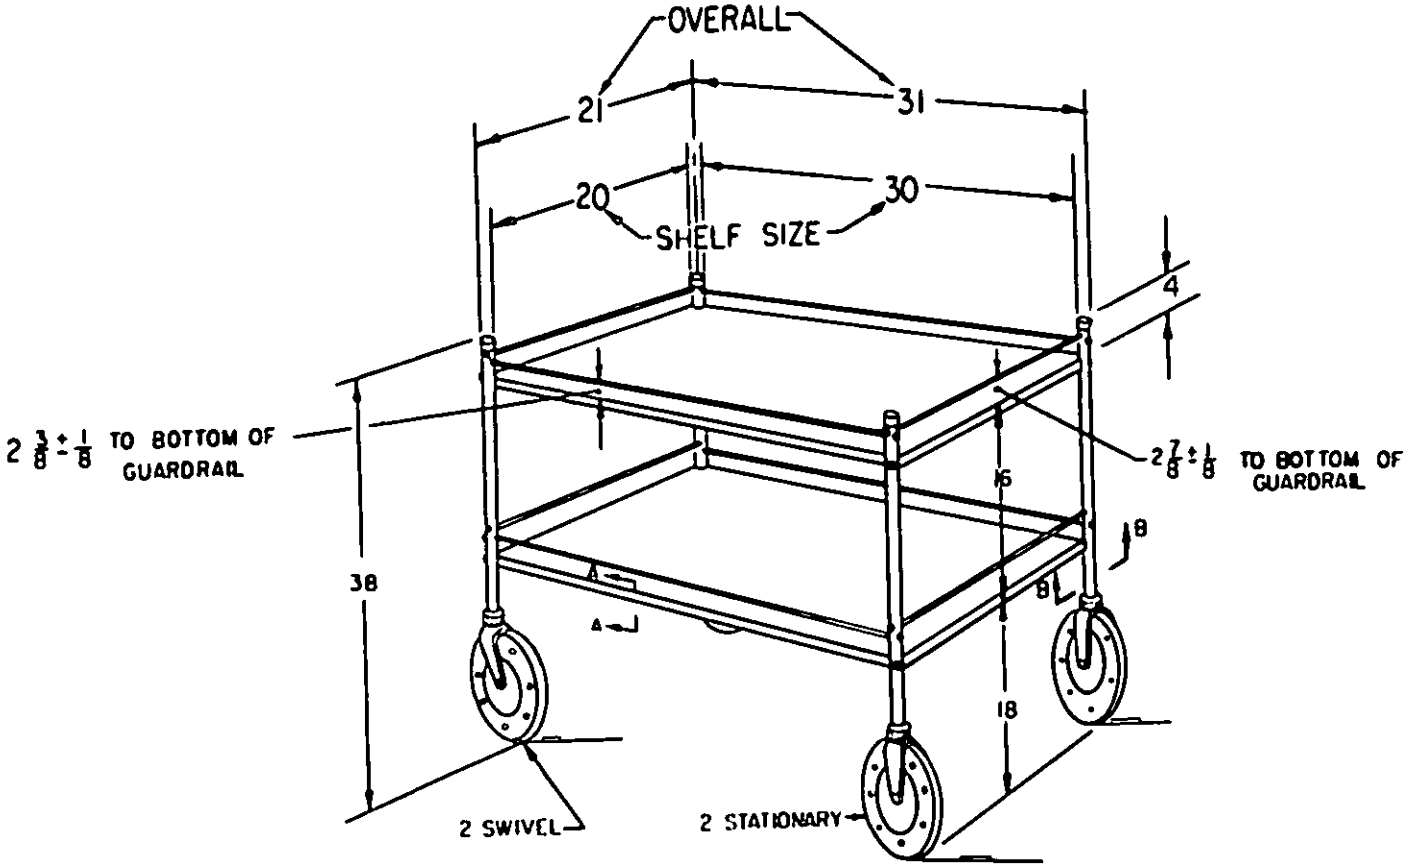



SECT A-A

NOTE:
UNLESS OTHERWISE SPECIFIED TOLERANCE ON ALL DIMENSIONS ± 1/4

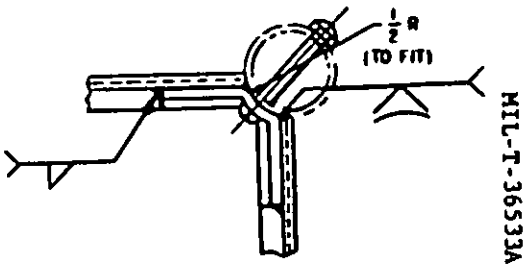

VIEW B-B

FIGURE 1
TRUCK, HAND SHELF

MIL-T-36533A

DWG 70336
26 JUNE 75

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

* 3.2.1 Uprights. Uprights shall be 1 inch outside diameter tubing having a wall thickness of 0.083 inch, No. 14 Birmingham Wire gage (BW gage). Tops of uprights shall be capped by steel disks welded on. The uprights shall be fitted with casters. Each caster shall be secured to its upright with two 1/4-inch bolts, acorn nuts, and lockwashers. The bolts shall pass through the caster stem and upright. Two swivel and two rigid casters shall be supplied for each cart. Nuts shall engage at least 4 threads when tight.

* 3.2.2 Shelves. Shelves shall be formed of 0.075 inch thick No. 14 U.S. Standard gage (U.S.S. gage) sheet with all edges turned down 1-1/8 inches and returned under the top. The corners shall be notched on a 1/2 inch radius and fitted with a 1/8 by 1 inch bar formed to fit the contour of the uprights as shown on the figure, securely welded to the shelves. Shelves shall be secured to uprights with 1/4 inch bolts, acorn nuts, and lockwashers, with the bolts passing through the bars, as shown on the figure. Nuts shall engage at least four threads when tight.

3.2.3 Guardrails. Each shelf shall have a guardrail composed of four separate lengths of 3/8 inch diameter rod threaded on both ends, and each end fitted with an acorn nut and lockwasher. Each section of the guardrail shall be of such length that when the nuts are drawn tight, the rod shall be in tension, thus acting as a brace and adding to the rigidity of the unit. Nuts shall engage at least 4 threads at each rod end when tight.

* 3.3 Finish. All steel parts, except casters, acorn nuts, lockwashers and bolts shall be given a phosphate coating conforming to Type I of TT-C-490. The duration of the salt spray test in TT-C-490 shall be 144 hours. The phosphate coating shall be followed by an overall coating of synthetic primer conforming to TT-P-636, and by two coats of enamel conforming to TT-E-527. The color shall be olive drab conforming to color 34087 (see 6.1) of FED-STD-595. The parts shall be baked after each coat to yield a smooth hard finish that shall resist cracking and chipping. Baking shall be performed at a temperature of 250°F., or higher, as recommended by the paint manufacturer but not to exceed 350°F. Side plates of wheels, horn, and top portion of casters shall be cadmium or zinc plated, treated as specified in QQ-P-416, class 1, type III, followed by a coat of synthetic primer conforming to TT-P-636, and by two coats of air drying enamel. As an alternate, after casters are plated, a coating of bonderize acid primer followed by two coats of air drying lacquer, shall be applied. The result shall be a bonded finish on the plating. The color shall be olive drab conforming to color 34087. Nuts, bolts, and lockwashers shall be zinc plated in accordance with type II, class 2 finish of QQ-Z-325 followed by olive drab film.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

3.4 Identification marking. Each truck shall be permanently and legibly marked with the following information:

Manufacturer's name or registered trade mark
Contract or purchase order number

* 3.5 Service Data. The contractor shall furnish, with each unit, two copies each of service data which contains complete instructions for assembly and maintenance and lists of component parts. Each part of the unit other than common fasteners shall be identified in the service data by the manufacturer's part number. As soon as practicable after award of the contract or purchase order, the contractor shall furnish to the Contracting Officer, via the cognizant Government inspector, two preliminary copies of his proposed service data for review and comment by the Directorate of Medical Materiel, Defense Personnel Support Center. The preliminary copies shall be submitted sufficiently early to permit adequate review by the Directorate of Medical Materiel, Defense Personnel Support Center (based on a maximum period of 30 days for such review) and to allow incorporation by the contractor of any required revisions and corrections in the final copies without delaying delivery under the contract, or purchase order. In addition, the Contractor shall furnish 15 copies of the approved service data to the Contracting Officer for distribution. Should the supplier have furnished acceptable data for the identical item within two years preceding the date of the contract and propose to furnish copies identical with those previously accepted, then the requirements for review of drafts and submission of 15 additional copies may be waived upon request to the Contracting Officer. Waiver of submission of drafts and submission of 15 additional copies shall be at the option of the Government.

3.6 Government. Workmanship shall be first class throughout. The trucks shall be free from defects which detract from their appearance or which may impair their serviceability. All exposed corners and edges shall be ground smooth, rounded, or otherwise treated to eliminate sharp or ragged edges.

* 3.6.1 Welding. Welding shall be durable, sound in every detail and in accordance with latest practices recommended by the American Welding Society. All welds shall be produced by qualified welding operators with satisfactory welding equipment using satisfactory filler metal and/or electrode where applicable to provide the best possible weld. Surfaces to be welded shall be free from grease, oil, oxides or any other foreign matter. Any cleaning method which will remove these substances and leave the surface clean is satisfactory. All weld joints shall blend into the adjacent metal in gradual, smooth curves. Beads shall be smooth and free of slag, spatter or excessive undercut. Sufficient metal shall be added to provide a suitable fillet or reinforcement unless otherwise specified. Fusion through the full thickness

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

3.6.1 Welding (cont'd)

of the base metal, in areas other than those where 100% penetration is a requirement of joint design, is not acceptable when welding materials over 0.050 inch in thickness. Welds shall not be oxidized. All welds shall be continuous with no visible voids, pin holes, or cracks which affect the quality. Corner fittings shall be properly aligned and the welds on the face of the corner notches shall be ground smooth to fit flush against the uprights.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, and auditory, investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the component or material may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The Certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and Table I.

Table I. Sampling for Examination

	Inspection level	AQL (defect per hundred units)
For visual examination		
Major defects	S-4	1.0
Total defects (major and Minor combined)	S-4	4.0
For dimensional examination	S-1	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 for an Inspection level of S-1 and an AQL of 1.0.

* 4.3 Examination. The handtrucks shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects as shown in Table II.

Table II. Classification of Defects*

Major	
101	Any component not present, not usable.
102	Handtruck not readily assembled and disassembled.
103	All edges and holes not free of burs and sharpness.
104	Assembled unit not rigid and free moving on its casters.
105	Caster type not as specified.
Minor	
201	Guardrail not in tension when retaining nuts are tightened.
202	Service data not present, not clear.
203	Finish not free of chipped areas, cracks, scratches, roughness, or not the olive drab color specified.
204	Bolt holes not of proper bore; or not properly aligned with mating surfaces.
205	Identification marking not complete, permanent, legible or not securely attached to the truck.
206	Welded areas not free of spatter and porosity.

* Examination shall not be restricted to the classified possible defects listed above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

4.3.2 Dimensional examination. The handtruck shall be examined for compliance with dimensional requirements. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Chemical composition. Tests for chemical analysis shall be conducted in accordance with method 111.1 or 112.1 of FED-STD-151.

4.5 Examination for delivery. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements of Section 5. Defects shall be scored as specified in Table III. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0 defects per hundred units.

Table III. Examination for Delivery

Examination	Defect
Containers	Not as specified.
Quantity	Quantity in interior packages and shipping containers not as specified.
Packaging and Packing Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, tape improperly applied, or containers distorted.
Markings	Omitted, incorrect, illegible, improper size, location, sequence, or method of application

5. PREPARATION FOR DELIVERY

5.1 Unit of issue. One truck, as specified, constitutes one unit of issue.

5.1.2 Packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.3 Level A.

5.1.3.1 Unit preparation. Each unit shall be disassembled as far as is practicable. All exterior surfaces of the items shall be protected by wrapping with kraft paper and cushioning with flexible corrugated fiberboard, or other suitable materials. Wrapping and cushioning material shall be secured by tying with cotton cord or tape, or by sealing with kraft gummed tape. Work shall be accomplished in such a manner as to insure against markings, scratching, or damage to the unit. Disassembled and component parts shall be packaged in one or more cartons of appropriate size and design constructed in accordance with PPP-B-636. Cartons shall be designed

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

with suitable interior fittings, or shall contain sufficient cushioning material, to insure against shifting of, or damage to the contents. Cartons shall be adequately secured to prevent accidental opening.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.2).

5.2.1 Level A.

* 5.2.1.1 Exterior container. Each unit shall be packed in an exterior container which shall be designed for type 3 load, and constructed in accordance with PPP-B-601, overseas type or PPP-B-621, class 2. Item and components shall be secured within the exterior container to prevent shifting. Closure shall comply with appendix of applicable box specification.

5.2.1.2 Case liner. Each level A box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto.

5.2.1.3 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

Note: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

* 5.2.2.1 Each unit shall be packaged as specified in 5.2.1, except that exterior container shall conform to PPP-B-601, domestic type or PPP-B-621, class 1.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Interior packages shall be marked to identify its contents.

5.3.2 Exterior containers. Exterior containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Availability of color chips. The individual 3- by 5- inch chips of the color referenced in 3.3 are available from:

Commissioner
Federal Supply Service
General Services Administration
Standardization Division, Paints Branch
Washington, DC 20406

6.2 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.

(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification covers the following item appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6530-00-774-1075	TRUCK, HAND, SHELF, Surgical Dressing.

6.4 This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6530-1282
CS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-36533A TRUCK, HAND, SHELF

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA 19101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304



HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:45Z
Check the source to verify that this is the current version before use.