INCH-POUND


MIL-T-27/235C
8 April 1992
SUPERSEDING
MIL-T-27/235B
21 June 1983


MILITARY SPECIFICATION SHEET

TRANSFORMERS, POWER, ISOLATION, SHIELDED, TF4R03YY

This specification is approved for use by all Depart ments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27

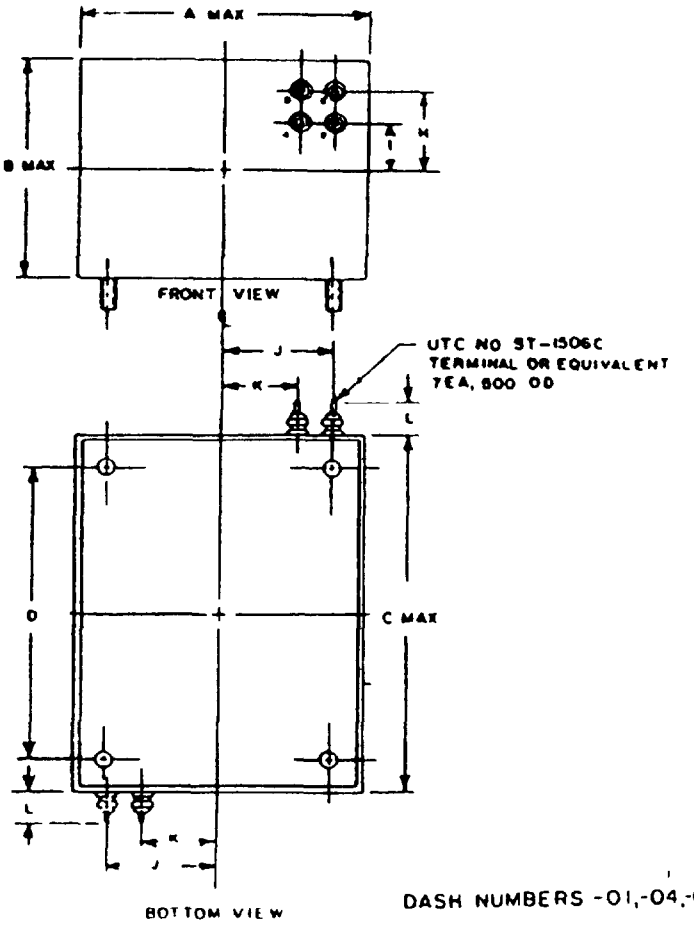

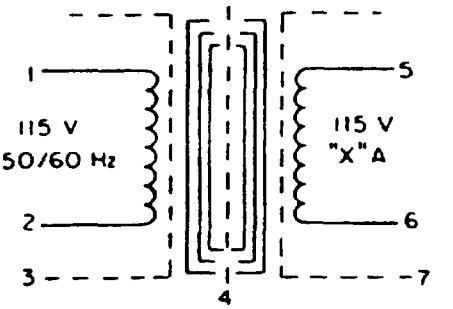

(SEE TABLE I FOR VALUE OF "X")

CIRCUIT DIAGRAM AND MARKING

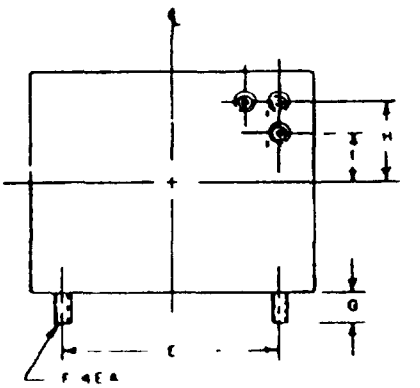


DASH NUMBERS -01,-04,-05

FIGURE 1 Dimensions and configurations

(C) denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:55Z
Check the source to verify that this is the current version before use.

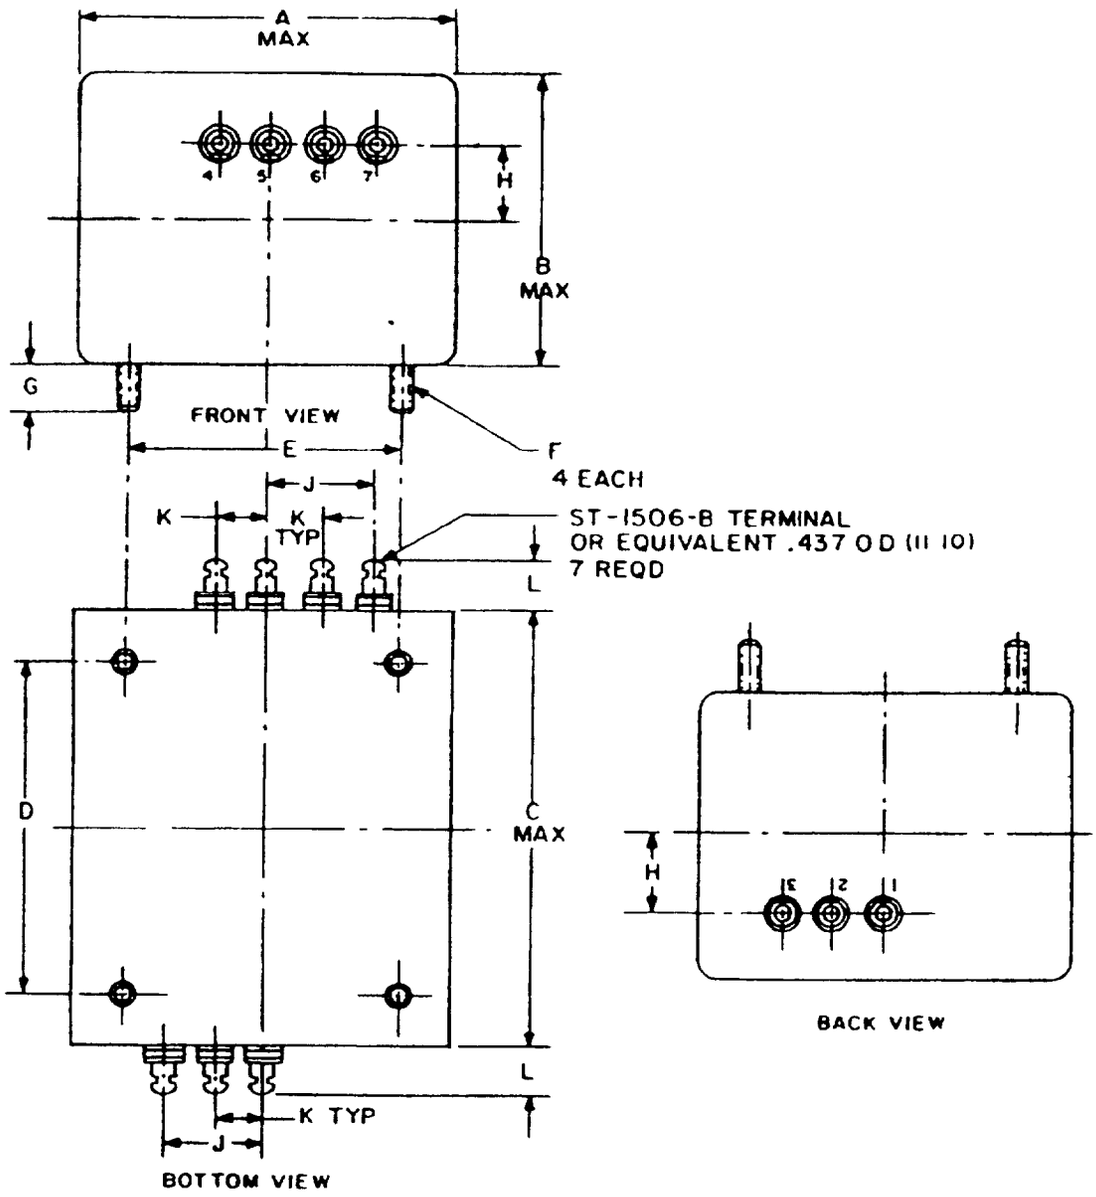

DASH NUMBERS -02 AND -03

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

Dash no	A max	B max	C max	D	E	F	G	H	I	J	K	L
01	6 531 (165 89)	5 531 (140 49)	8 000 (203.20)	7 062 (179 37)	5 625 (142 88)	3125-18 UNC-2A	812 (20 62)	2 062 (52 37)	1 312 (33 32)	2 750 (69 85)	2 000 (50.80)	750 (19 05)
02	4 032 (102.41)	3 032 (77 01)	4.032 (102.41)	3.375 (85 72)	3 375 (85 72)	10-32 UNF-2A	500 (12 70)	875 (22 22)		1 500 (38 10)	750 (19 05)	5625 (14 288)
03	5 344 (135.74)	3 500 (88 90)	5 000 (127.00)	4 312 (109.52)	4 625 (117 48)	10-32 UNF-2A	500 (12.70)	.875 (22 22)		2 000 (50 80)	1.000 (25 40)	.5625 (14.288)
04	5 531 (140 49)	4 531 (115 09)	5 531 (140.49)	4 812 (122 22)	4 812 (122 22)	10-32 UNF-2A	500 (12.70)	1 625 (41 28)	1 25 (31.8)	2.3125 (58 738)	1 750 (44 45)	531 (13.49)
05	7 500 (190 50)	7 500 (190 50)	9 000 (228.60)	8 000 (203 20)	6 500 (165.10)	312-18 UNC-2A	.937 (23 80)	3.000 (76 20)	2.25 (57.2)	3.25 (82 6)	2.50 (63.5)	750 (19.05)

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Metric equivalents are in parentheses
4. Unless otherwise specified, tolerance on all dimensions shall be ± 031 (0 79 mm)
5. Marking shall be on top of case.
6. Secondary current and the working voltage as specified in table I shall be marked as applicable

FIGURE 1 Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 20260-16T03:55Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics

Dash number	Weight (lbs max)	Secondary current (amperes)	Working voltage		Primary power (VA)	No load		DC resistance		No load secondary volts (5-6)
			Primary (volts)	Secondary (volts)		Primary current (mA)	Primary power (watts)	Primary ±25% (ohms)	Secondary ±25% (ohms)	
01	35	3 5	175	175	400	400	10	35	38	129
02	5 5	435	175	175	50	150	2 5	11	13	131 5
03	13	1 04	175	175	120	300	5	2 1	3	127 8
04	15 5	1 4	175	175	160	300	5.5	1 5	1 65	128
05	60	8 7	175	175	1000	1000	13 5	116	155	123

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings·

Primary (1-2)· 115 volts rms, 50/60 hertz, see table I.

Secondary (5-6): 115 volts rms, see table I

Working voltage (peak) See table I

Design and construction:

Dimensions and configurations See figure 1.

Duty cycle: Continuous.

Case· Metal encased

Material: Brass

(C) Mounting cover Cold rolled steel

Terminals Brass, solder lug, insulated, United Transformer Company P/N ST-1506C, or equal

Height: See table I

Weight See table I

Operating temperature range -55°C to +105°C

Dielectric withstanding voltage (at sea level). 500 volts rms

Electrical characteristics·

No load: With 115 volts rms, 60 hertz across (1-2), current in (1-2) shall not exceed "X" milliamperes and the power in (1-2) shall not exceed "Y" watts.

Voltage across (5-6) 115 volts rms ±3 percent See table I for "X" and "Y" values

Rated load With 115 volts, 60 Hz across (1-2), the voltage across (5-6) shall be 115 volts ±3 percent.

Polarity· Additive with terminals 2 and 6 connected

Electrostatic shielding Voltage ratio > 100 1 at 20 kilohertz

DC resistance See table I

Temperature rise· 40°C with 115 volts rms, 60 hertz across (1-2) at an ambient temperature of 65°C

Marking location See figure 1.

Part or Identifying Number (PIN): M27/235-(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:55Z
Check the source to verify that this is the currentversion before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - SH, OS
Air Force - 17, 99
DLA - ES

User activities
Army - AR
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0801)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:55Z
Check the source to verify that this is the current version before use.