INCH-POUND

MIL-T-27/229A
13 March 1991
SUPERSEDING
MIL-T-27/229
20 MAY 1978


MILITARY SPECIFICATION SHEET


TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTORS, POWER, TF5T04ZZ

Ⓐ Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

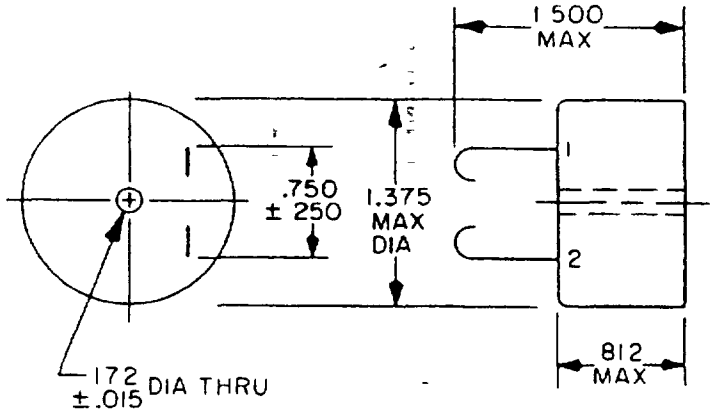



WORKING VOLTAGE (1-2) 28 V (P TO P)
ALTITUDE 70,000 FT MAX

CIRCUIT DIAGRAM AND MARKING

FIGURE 1 Dimensions and configurations.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

Inches	mm
.015	0.38
.172	4.37
.250	6.35
.750	19.05
.812	20.62
1.375	34.92
1.500	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side of the case.

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Inductance (1-2): 60 microhenries.

Voltage (1-2): 28 volts peak to peak, 10 kilohertz.

Current (1-2): 6 amperes.

DC resistance (1-2): .025 ohm maximum.

Working voltage (1-2): 28 volts peak to peak.

Power: 4.5 watts.

Design and construction:

Dimensions and configuration. See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals. Solid wire lead per J-W-1177/24, type H2, 16 AWG.

Altitude: 70,000 feet maximum.

Weight: 4 ounces maximum.

Operating temperature range: -55°C to +170°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 1,000 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics: See table I.

Inductance With 28 volts peak to peak, 10 kilohertz across (1-2) and 0 amperes dc applied to (1-2), the inductance shall be 60 microhenries minimum

DC resistance (1-2) .025 ohm maximum.

Temperature rise: 99°C maximum with 28 volts peak to peak, 10 kilohertz, 6 amperes dc applied to (1-2) at an ambient temperature of 71°C.

Ⓐ Quality assurance provisions.

Qualification inspection: Not applicable.

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

Marking location See figure 1

Part number: M27/229-01.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities.
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0753-42)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.