

MILITARY SPECIFICATION SHEET

TRANSFORMER, SATURABLE, TF5S40ZZ


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

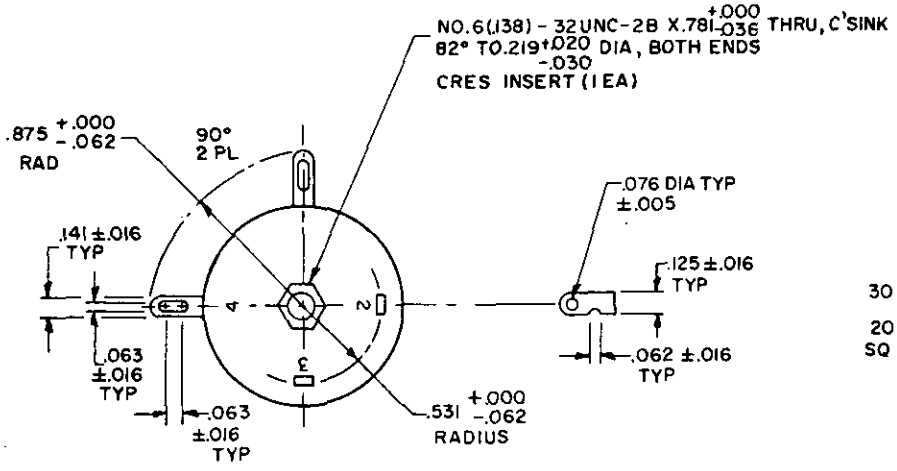



WV(pk) : 32 V

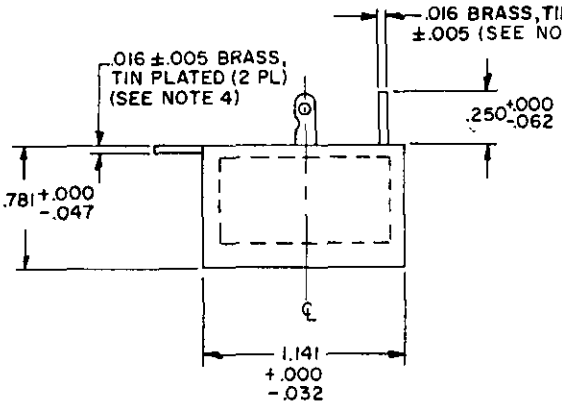

CIRCUIT DIAGRAM AND MARKING

INCHES	MM	INCHES	MM
.005	.13	.076	1.93
.016	.41	.125	3.18
.020	.51	.141	3.58
.030	.76	.219	5.56
.032	.81	.250	6.35
.036	.91	.531	13.49
.047	1.19	.781	19.84
.062	1.57	.875	22.22
.063	1.60	1.141	28.98
.065	1.65		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the side of case.
4. Brass, 70% Cu, 30% Zn, per Federal Specification QQ-B-613.

FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Voltage:
(1-GND): 36 volts rms (input), 20 kilohertz square wave.
(2-GND): 9.5 to 11.5 volts.
Current:
(1-2): 10.5 milliamperes dc.
(3-4): 3.0 amperes dc.
Volt-ampere rating: 0.378 volt-ampere.
Primary impedance (1-2): 3,000 ohms.
Working voltage (peak): 32 volts.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Encapsulated.
Material: Epoxy.
Terminals: Solder lug.
Terminal height:
1 and 4: 0.320 inch, maximum.
2 and 3: 0.250 inch, maximum.
Weight: 34.02 grams, maximum.
Operating temperature range: -55° to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2.0 pounds.

Dielectric withstanding voltage (at sea level): 100 volts rms.

Electrical characteristics:
No load (see figure 2): With 36 volts rms, 20 kilohertz square wave across (1-GND), current in (1-2) shall not exceed 10.5 milliamperes dc.
Voltage across (2-GND): 9.5 to 11.5 volts.
Current across (3-4): 3 amperes dc ±9.5 percent.

DC resistance:
(1-2): 12.41 to 16.79 ohms.
(3-4): 0.0012 to 0.0018 ohm.

Temperature rise: 50°C with 36 volts rms, 20 kilohertz square wave across (1-GND) and with 9.5 to 11.5 volts across (2-GND) at an ambient temperature of 80°C.

Vibration (high frequency): MIL-STD-202, method 204, test condition A.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Marking location: See figure 1.

Part number: M27/232-01.

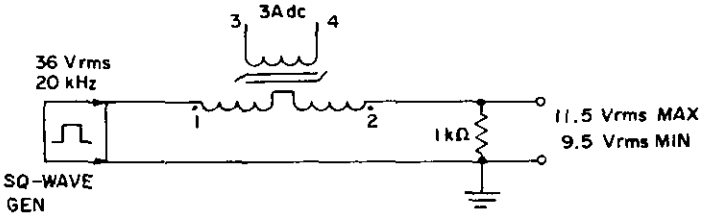


FIGURE 2. Test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, WC, ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DLA - ES

(Project 5950-0555-23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:55Z
Check the source to verify that this is the current version before use.