INCH-POUND

MIL-T-27/255A
13 March 1991

SUPERSEDING
MIL-T-27/255
6 NOVEMBER 1978

MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEPDOWN, TF5T03ZZ

Ⓐ Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

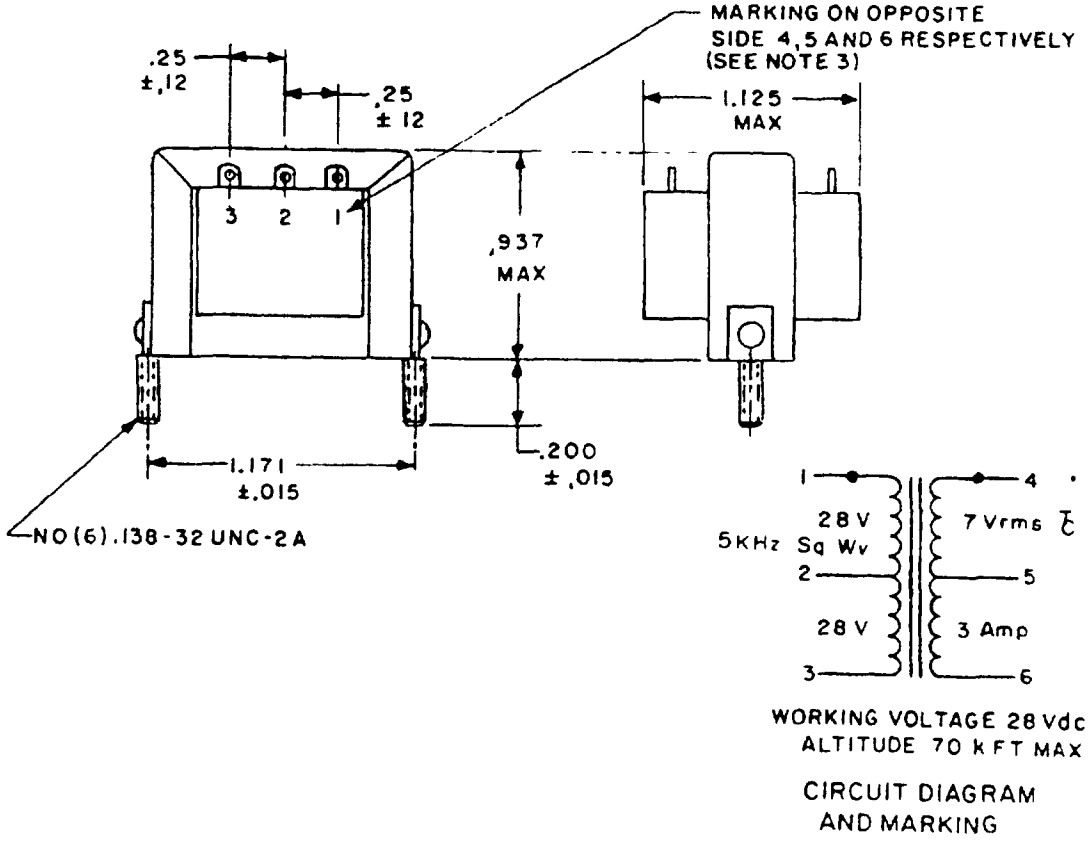


FIGURE 1 Dimensions and configurations.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

Inches	mm
.015	0.38
.12	3.0
.200	5.00
.25	6.4
.937	23.80
1.125	28.58
1.171	29.74

NOTES:
1. Dimensions are in inches.
2 Metric equivalents are given for general information only.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Primary voltage:

(1-2): 28 volts rms, 5 kilohertz square wave ±20 percent.
(1-3): 56 volts rms.

Volt-ampere rating: 30 volt-amperes.

Secondary voltage (4-6): 7.0 volts rms ct.

Secondary current (4-6): 3.0 amperes rms.

Working voltage: 28 volts dc.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals: Solder terminal, tin-plated copper.

Height: Not to extend beyond case.

Weight: 2.0 ounces maximum.

Altitude: 70,000 feet maximum.

Operating temperature range: -55°C to +170°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5.0 pounds.

Dielectric withstanding voltage.

At sea level: 1,000 volts rms.

At reduced barometric pressure. 300 volts rms.

Electrical characteristics:

No load: With 28 volts, 5 kilohertz square wave across (1-2).

Current in (1-2): 80 mA maximum

Power in (1-2). 2.5 watts maximum.

Voltage across (4-6): 3 5 volts ±.03 percent

Rated load: With 28 volts, 5 kilohertz square wave across (1-2), the voltage across (4-6) shall be 3.5 volts ±0.03 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

DC resistance:

(1-3). .040 ohm maximum.
(4-6). 6.0 ohms maximum.

Polarity: Additive with 3 and 4 connected.

Temperature rise: 30°C with 28 volts rms, 5 kilohertz square wave across (1-2) at an ambient temperature of 140°C.

Ⓐ Quality assurance provisions.

Qualification inspection. Not applicable.

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1.

Part number: M27/255-01.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent:
DLA - ES

(Project 5950-0753-43)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.