INCH-POUND

MIL-T-27/259A
13 March 1991
SUPERSEDING
MIL-T-27/259
23 OCTOBER 1978


MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTORS, POWER (60 VA), TF5T04ZZ

Ⓐ Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

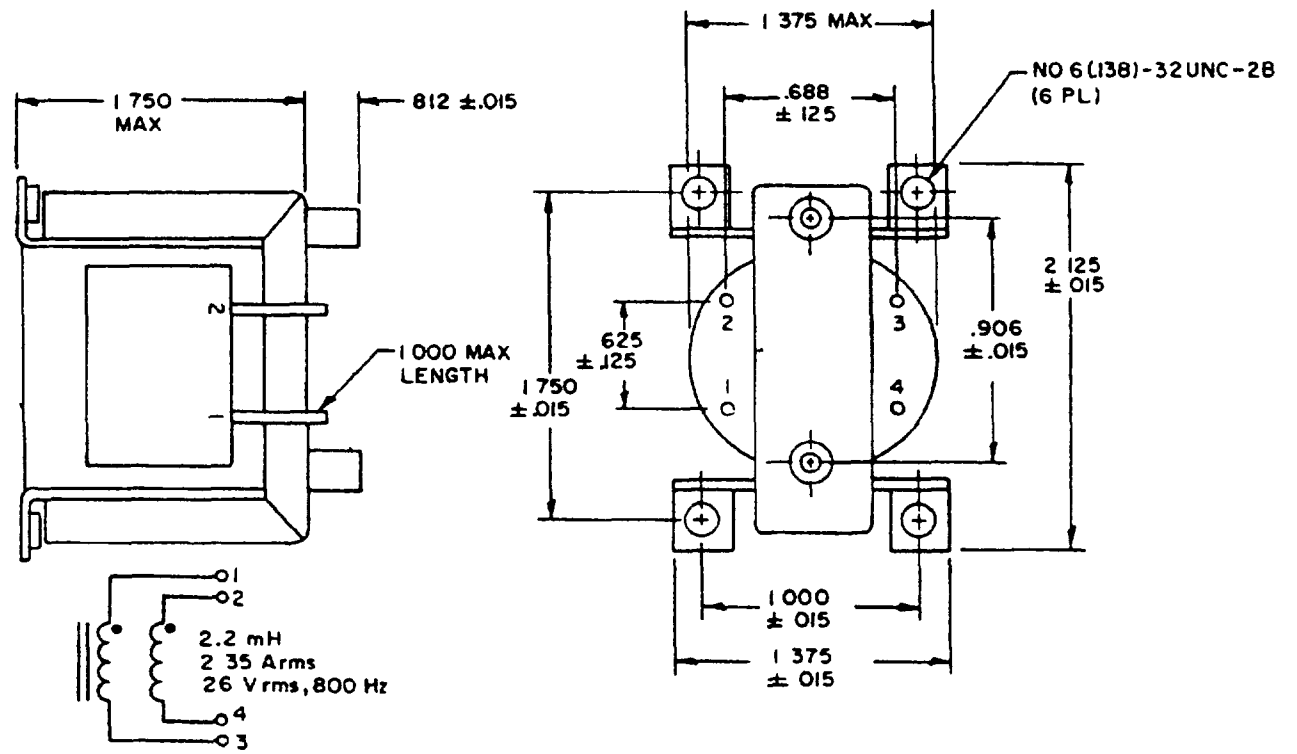

WORKING VOLTAGE: 26 V (peak)

ALTITUDE - 70,000 FT MAX

CIRCUIT DIAGRAM AND MARKING

FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.015	0.38	.906	23.01
.125	3.18	1.000	25.40
.625	15.88	1.375	34.92
.688	17.48	1.750	44.45
.812	20.62	2.125	53.98

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the sides of the case.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-4) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Inductance (1,2-4,3). 2.2 mH minimum.

Voltage (1,2-4,3): 26 volts rms, 800 Hz.

Current (1,2-4,3): 2.35 amperes rms.

DC resistance: 0.15 ohm ±20 percent.

Working voltage (peak): 26 volts.

Power: 60 volt-ampere maximum

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case:

Material: Metal encased.

Terminals: (4) Solid wireleads (J-W-1177/12, type H2, No 19 AWG).

Height: 1.000 inch maximum length.

Weight: 6 ounces maximum.

Operating temperature range. -55°C to +170°C.

Altitude: 70,000 feet.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage:

At sea level: 1,000 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics

Inductance: With 26 volts rms, 800 Hz and 2.35 amperes rms applied to (1,2-4,3), the inductance shall be 2.2 mH minimum.

Temperature rise: 99°C maximum with 26 volts rms, 800 Hz and 2.35 amperes applied to (1,2-4,3) at an ambient temperature of 71°C.

Ⓐ Quality assurance provisions:

Qualification inspection: Not applicable.

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1.

Part number: M27/259-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0753-44)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.