| INCH-POUND |

MIL-T-27/260B
13 March 1991
SUPERSEDING
MIL-T-27/260A
7 OCTOBER 1987

MILITARY SPECIFICATION SHEET

TRANSFORMERS, POWER, TF5T03ZZ

Ⓑ | Inactive for new design after the date of this specification. |

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

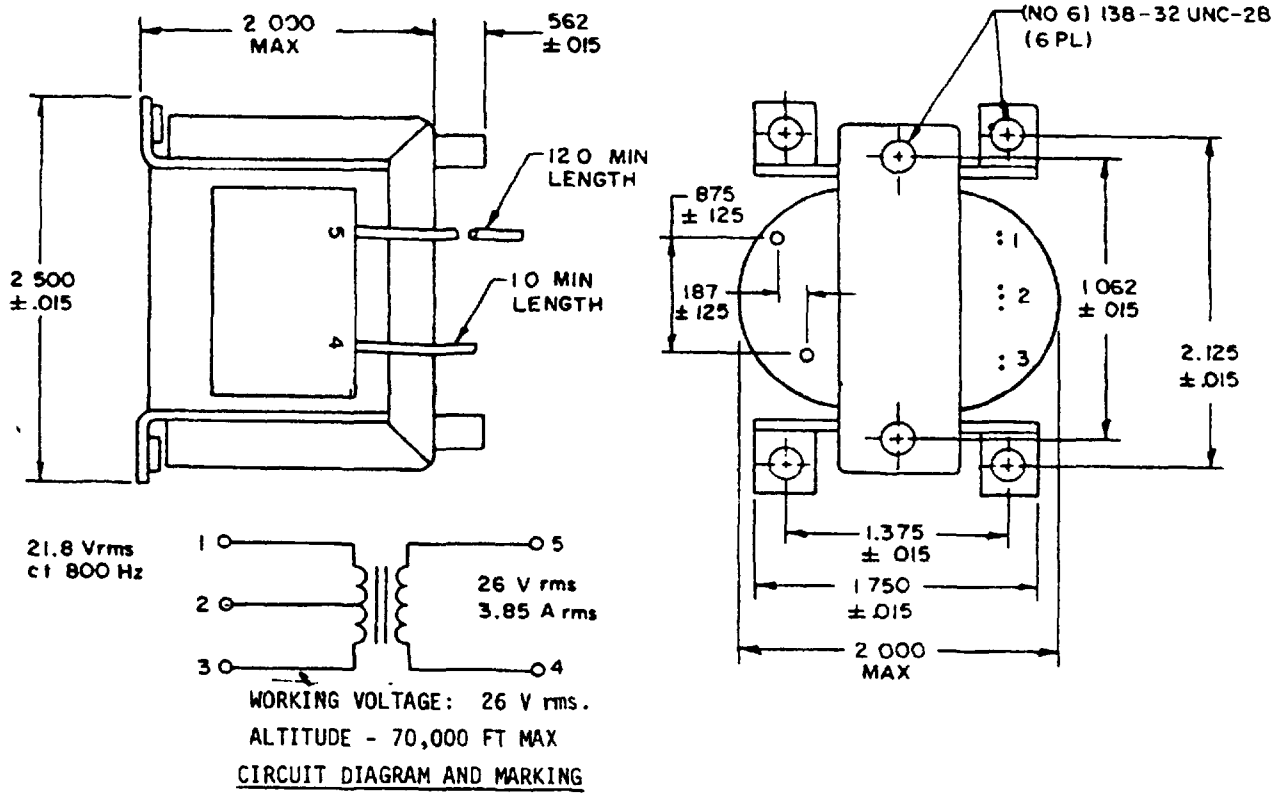


FIGURE 1. Dimensions and configuration.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.015	0.38	1.375	34.92
.125	3.18	1.750	44.45
.187	4.75	2.000	50.80
.562	14.27	2.125	53.98
.875	22.22	2.500	63.50
1.0	25.	12.0	305.
1.052	26.97		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary voltage (1-3): 100 voltamperes, 21.8 volts rms ct, 800 hertz.

Secondary voltage: (4-5) 26 volts rms, 3.85 amperes rms.

Working voltage:

(1-3): 20 volts rms.
(4-5): 26 volts rms.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case:

Material: Encapsulated.

Terminals: All solid wireleads (J-W-1177/12, type H2, number 15 AWG); and (1) insulated wire lead (number 20 AWG, type E in accordance with MIL-W-16878), No. 5 lead.

Height: 12.0-inches minimum length, number 5 lead; other leads 1.0-inch minimum length.

Weight: .88 pound maximum.

Operating temperature range: -55°C to +170°C.

Altitude: 70,000 feet maximum.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds for solid wire leads and 2 pounds for insulated wire lead.

Dielectric withstanding voltage (each winding):

At sea level: 1,000 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics:

No load: With 21.8 volts rms, ct and 800 Hz in (1-3):

Current in (1-3): 5 amperes rms.

Power in (1-3): 100 watts maximum.

Voltage across: (4-5): 26 volts rms ±5 percent.

Rated load: With 21.8 volts, rms ct and 800 Hz in (1-3), and rated current in secondary.

Voltage across: (4-5): 26 volts rms ±1 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

DC resistance:

(1-3): .015 ohm ct ±20 percent.
(4-5): .06 ohm ±20 percent.

Temperature rise: 99°C with 21.8 volts rms, ct, 800 hertz across (1-3) at an ambient temperature of 71°C, full load terminals (4-5).

Ⓑ Quality assurance provisions

Qualification inspection. Not applicable.

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1.

Part number M27/260-01.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0753-45)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:58Z
Check the source to verify that this is the current version before use.