INCH-POUND

MIL-T-27/261B
9 November 2009
SUPERSEDING
MIL-T-27/261A
11 August 1993

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE) INDUCTORS, POWER (100 VA)

Inactive for new design after 25 August 1998

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the transformer described herein shall consist of this specification sheet and MIL-PRF-27.

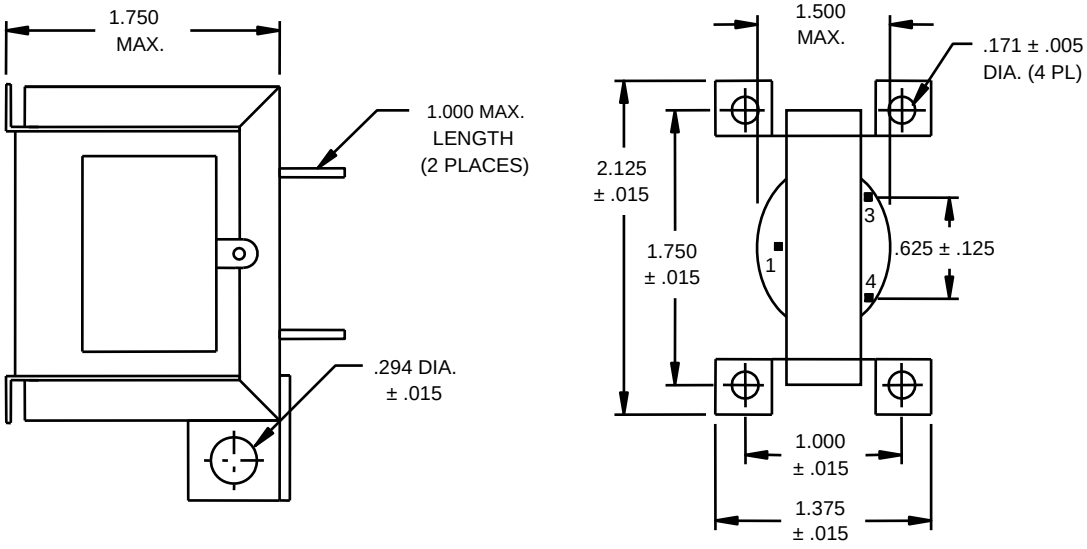

WORKING VOLTAGE: 26 V (PEAK)
ALTITUDE = 70,000 FT. MAX.

CIRCUIT DIAGRAM AND MARKING

Inches	mm	Inches	mm
.005	0.13	.625	15.88
.015	0.38	1.000	25.40
.125	3.18	1.375	34.92
.171	4.34	1.500	38.10
.294	7.47	1.750	44.45
		2.125	53.98

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the sides of the case.

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, such as (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Inductance (1-3, 4): 1.35 mH, minimum.

Voltage (1-3, 4): 26 volts rms, 800 Hz.

Current (1-3, 4): 3.85 amperes rms.

DC Resistance (1-3, 4): 0.2 ohm, maximum.

Working voltage (peak): 26 volts.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case:

Material: Metal encased.

Terminals: (1) Solder lug (copper, tin plated), (2) solid wire leads (NEMA MW-1000, Heavy, AWG 19).

Height: Lug (.375 inch (9.53 mm) max.); Leads (1.000 inch (25.40 mm) max. length).

Weight: 6 ounces, maximum.

Operating temperature range: -55°C to +170°C.

Altitude: 70,000 feet, maximum.

Terminal strength: MIL-STD-202, method 211, test condition A, 5.0 pounds, for the lug and 2 pounds for the wire leads.

Dielectric withstanding voltage

At sea level: 1,000 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics:

Inductance: With 26 volts, 800 Hz and 3.85 amperes applied to (1-3, 4), the inductance shall be 1.35 mH, minimum.

Temperature rise: 99°C with 26 volts rms, 800 Hz and 3.85 amperes applied to (1-3, 4) at an ambient temperature of 71°C.

VERIFICATION:

Qualification inspection: Not applicable.

Conformance inspection: Groups A and B tests of MIL-PRF-27 shall be applicable.

Marking location: See figure 1.

Part or Identification Number (PIN): M27/261-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202
NEMA MW-1000

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5950-2009-004)

Review activities:
Army - AR, CR4
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.