
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-UP, TF5S03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

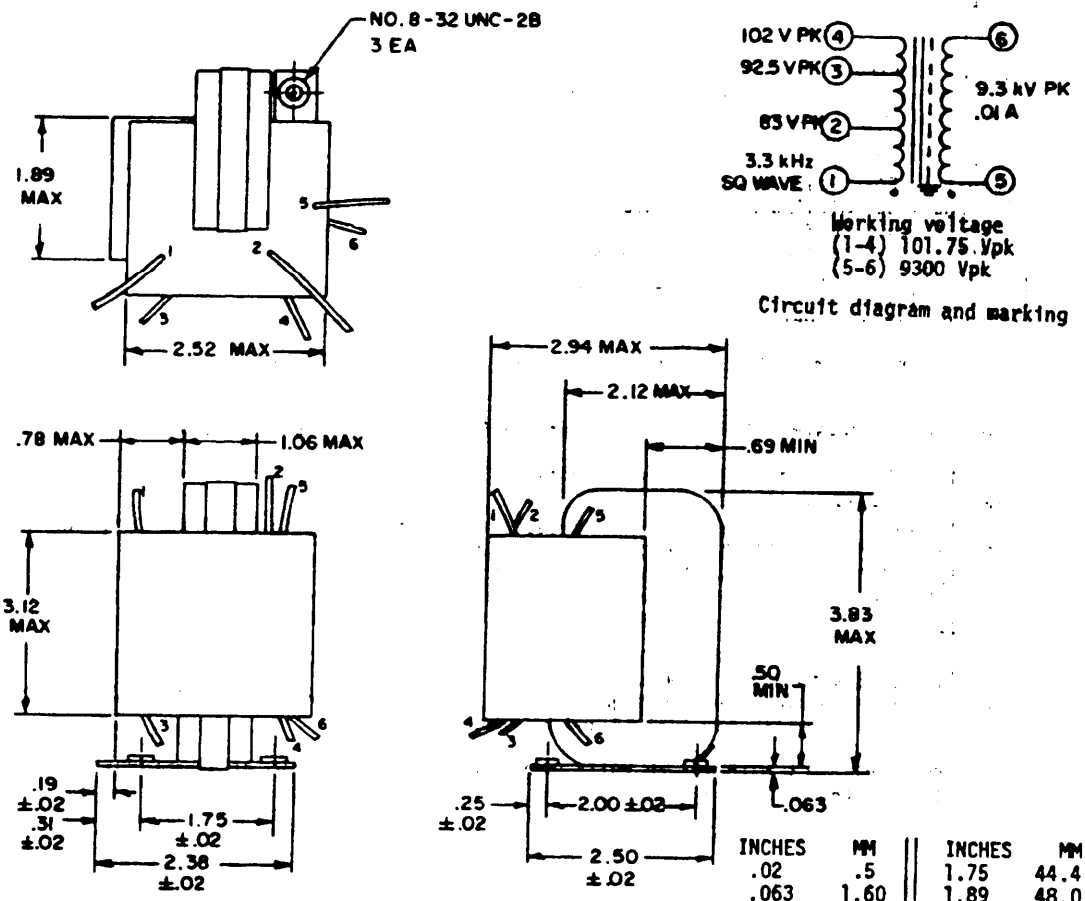

INCHES	MM	INCHES	MM
.02	.5	1.75	44.4
.063	1.60	1.89	48.0
.19	4.8	2.00	50.8
.25	6.4	2.12	53.8
.31	7.9	2.38	60.5
.50	12.7	2.50	63.5
.69	17.5	2.52	64.0
.78	19.8	2.94	74.7
1.06	26.9	3.12	79.2
		3.83	97.3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e. (1-2) are used, they indicate the winding and the extreme terminals of the windings).

Electrical ratings:
Primary:
112 VA (1-2) 83 V peak, 3.3 kHz square wave; (1-3) 92.5 V peak, 1.21 A
(1-4) 101.75 V peak 1.1 A, (1-2) 1.31 A
Secondary:
(6-5) 9300 V peak 0.01 A
Working voltage:
(1-4): 101.75 V peak.
(5-6): 9300 V peak.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Encapsulated.
Material: Epoxy.
Terminals: Flex leads per MIL-W-81044.
1-4 shall be M81044/6-20-* or equal. 1/
5 and 6 shall be M81044/6-24-* or equal. 1/
Height: Lead length 8 inches, minimum (6 leads).
Weight: 2.25 pounds maximum.
Operating temperature range: -55° to +130°C.
Altitude: 10,000 feet.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (each winding):
At sea level: 14kVrms (4-6), 2 k Vrms between 6-GND and 600 V each 1 to GND

Shock: MIL-STD-202, method 213, test condition H.

Electrical characteristics:
No load: With 101.75 V peak, 3.3 kHz across (1-4), the current in (1-4) shall be 300 mA rms and the power in (1-4) shall not exceed 30.6 watts, maximum.
Voltage across (5-6): 9,440 V peak ±5 percent.
Rated load: With 101.75 V peak, 3.3 kHz across (1-4) and rated current in all secondaries.
Voltage across (5-6): 9,300 V peak ±5 percent.
DC resistance:
(1-4): .277 to .373 ohms.
(5-6): 2.813 k to 3.807 k ohms.
Electrostatic shielding: The voltage ratio shall be minimum of 10 to 0.87 at 3.3 kHz (15 dB).
Polarity: Additive with terminals 4 and 5 connected.

Temperature rise: 50°C with 101.75 volts peak, 3.3 kHz across (1-4) at an ambient temperature of 80°C; full load terminals (5-6).

Marking location: See figure 1.

Part number: M27/266-01.

1/ The asterisks shall be replaced by color code designators per MIL-STD-681.

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0561-3)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-27/266 TRANSFORMER, POWER, STEP-UP, TF5S03ZZ

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.