METRIC

MIL-T-27/267C
20 April 1993
SUPERSEDING
MIL-T-27/267B
22 April 1988


MILITARY SPECIFICATION SHEET


TRANSFORMER, POWER, 7 VOLTAMPERES, TF5S03ZZ, METRIC

(C) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

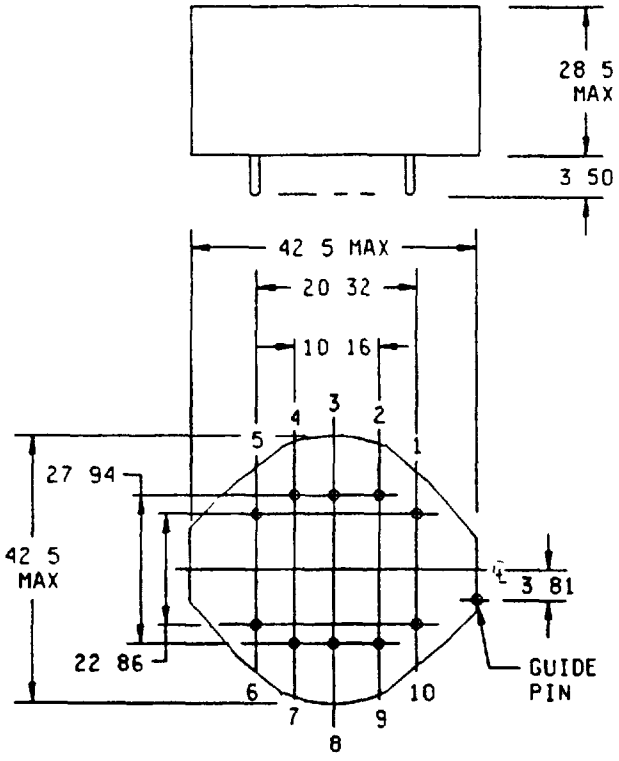

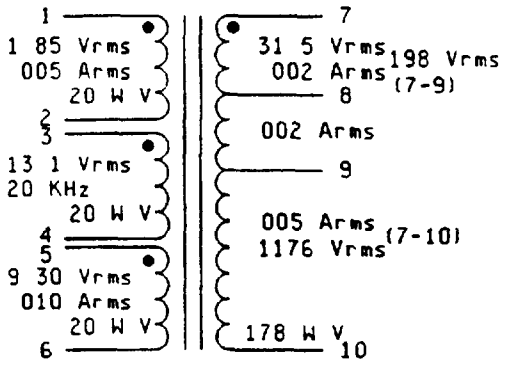

CIRCUIT DIAGRAM AND MARKING

mm	Inches	mm	Inches
3 50	136	22.86	892
3 81	.149	27 94	1 090
10 16	.396	28.5	1 11
20 32	792	42 5	1 66

NOTES
1 Dimensions are in millimeters
2 Inch-pound equivalents are given for information only
3 Marking shall be on the sides of the case
4 Tolerances on all dimensions are ±0.25 millimeter (± 010 inch), unless otherwise specified

FIGURE 1 Dimensions and configurations

(C) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary (3-4) 7 voltamperes, 13 1 V rms, 20 kHz

Secondary

(1-2) 1 85 V rms, 005 ampere rms
(5-6) 9 30 V rms, 010 ampere rms
(7-8) 31 5 V rms, 002 ampere rms
(7-9) 198 0 V rms, 002 ampere rms
(7-10) 1,176 V rms, 005 ampere rms

Working voltage

(1-2) = (3-4) = (5-6) 20 volts
(7-10) 178 volts

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy

Terminals Pin terminals for printed circuits, Siemens P/N C61035-A16-B1 or equivalent

Height 3 5 mm ± 25

Weight 108 grams, maximum

Altitude 10,000 feet maximum

Operating temperature range -55°C to +130°C.

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (each winding)

At sea level (1-2)· 100 volts rms (3-4) 100 volts rms (5-6) 100 volts rms.
(7-10)· 500 volts rms

Induced voltage Connect terminals 1, 3, 5, 7, and guide pin Apply 26 2 V rms, 20 kHz across (3-4).

Electrical characteristics

No load With 13 1 V rms and 20 kHz across (3-4) and terminals 1, 3, 5, and 7 connected

Current in (3-4) 750 ampere rms, maximum.
Power in (3-4)· 1.3 watts, maximum
Voltage across (1-2) 1 87 V rms, (5-6) 9 36 V rms, ±3 percent
(7-8) 31 8 V rms, (7-9) 200 V rms ±3 percent
(7-10) 1,188 V rms, ±3 percent

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:59Z
Check the source to verify that this is the current version before use.

Rated load. With 13 1 V rms, and 20 kHz across (3-4), and rated current in secondary

Voltage across	(1-2)	1 85 V rms ±3 percent
	(5-6)	9 30 V rms ±3 percent
	(7-8)	31 5 V rms ±3 percent
	(7-9)	198 V rms ±3 percent
	(7-10).	1,176 V rms ±3 percent

Inductance. With 1.0 V rms, 800 Hz across (7-10), the inductance (7-10) shall be 0 970 H ±5 percent

DC resistance

(1-2).	.05 ohm, maximum	(5-6)	20 ohm, maximum
(3-4)	25 ohm, maximum	(7-10)	270 ohms, maximum

Capacitance Capacitance across (3-4) and (7-10) shall be 70 pF maximum at 100 kHz

Polarity Additive, with terminals 2 and 3, 4 to 5, and 6 to 7

Temperature rise 40°C with 13 1 volts rms, 20 kHz across (3-4) at an ambient temperature of 90°C, with resistive load secondaries

Shock (specified pulse) MIL-STD-202, method 213, test condition K

(C) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location: See figure 1

Part or Identifying Number (PIN) M27/267-01

Substitution data (information only) This military transformer is substitutable for CAGE 72964, PIN 18765 This in no way implies that the manufacturer's part is substitutable for the military item This information is not intended to be complete

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-28)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:59Z
Check the source to verify that this is the current version before use.