
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, TF4V03JA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformer described herein shall consist of this specification and the latest issue of MIL-T-27.

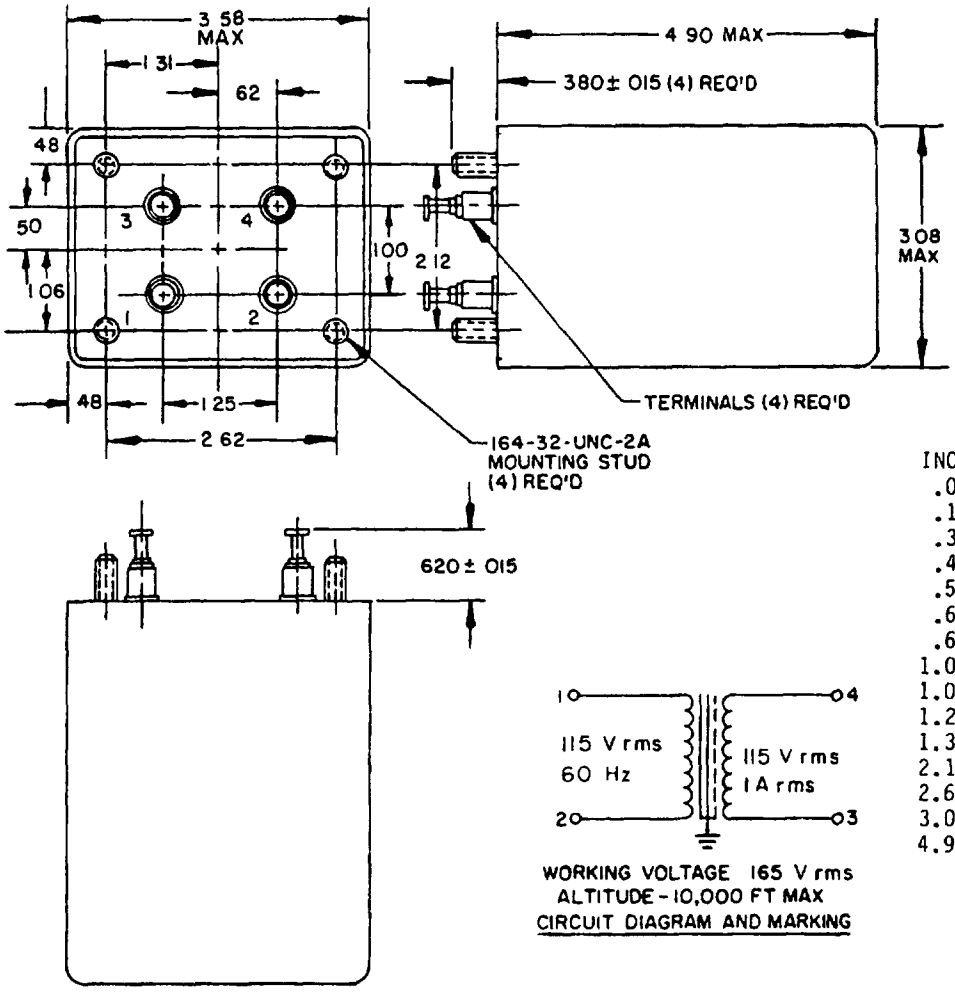


| INCHES | MM |
|---|---|
| .015 | 0.38 |
| .164 | 4.17 |
| .380 | 9.65 |
| .48 | 12.2 |
| .50 | 12.7 |
| .62 | 15.7 |
| .620 | 15.75 |
| 1.00 | 25.4 |
| 1.06 | 26.9 |
| 1.25 | 31.8 |
| 1.31 | 33.3 |
| 2.12 | 53.8 |
| 2.62 | 66.5 |
| 3.08 | 78.2 |
| 4.90 | 124.5 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the sides of the case.
4. Unless otherwise specified, tolerance is ±.02 (0.5 mm) for two place decimals.

FIGURE 1. Dimensions and configuration

Ⓑ denotes changes



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.

FSC 5950

REQUIREMENTS. (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary (1-2): 115 VA, 115 V rms, 60 Hz.

Secondary (3-4): 115 V rms, 1 ampere rms.

Working voltage:

(1-2): 165 V rms.

(3-4): 165 V rms.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Metal

Material: Steel.

Terminals: Turret type.

Height: .620 inch ±.015.

Diameter: .41 inch ±.02.

Weight: 7.0 pounds, maximum.

Operating temperature range: -55°C to +155°C.

Altitude: 10,000 feet.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (each winding): MIL-STD-202, method 301.

At sea level: 500 V rms.

Electrical characteristics:

No load: With 115 V rms and 60 Hz across (1-2) current in (1-2) shall not exceed .200 ampere, and the power in (1-2) shall not exceed 12 watts; voltage across (3-4) shall be 122 V rms ±5 percent.

Rated load: With 115 V rms and 60 Hz across (1-2), and rated current in secondary, the voltage across (3-4) shall be 115 V rms ±2 percent.

DC resistance:

Ⓑ (1-2): 4.5 ohms, maximum.

Ⓑ (3-4): 5.0 ohms, maximum.

Electrostatic shielding (voltage ratio): 5:1 at 60 Hz.

Polarity: Additive, with terminals 2 and 3 connected.

Temperature rise: 55°C with 115 V rms, 60 Hz across (1-2) at an ambient temperature of 100°C, full load terminals (3-4).



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): MIL-STD-202, method 213, test condition I.

Marking location: See figure 1.

Part number: M27/268-01.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project - 5950-0646-1)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.