
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, TF5V03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformer described herein shall consist of this specification and the latest issue of MIL-T-27.

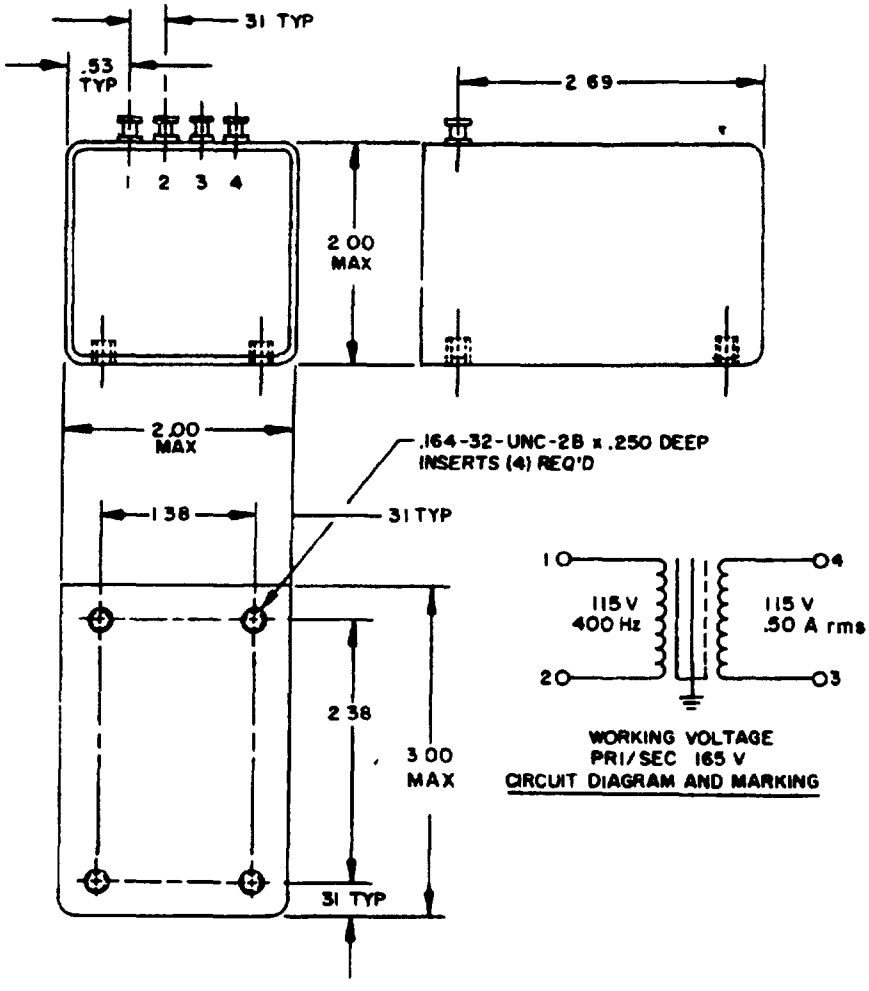

INCHES	MM
.164	4.17
.25	6 4
.31	7.9
.53	13.5
1.38	35 1
2.00	50.8
2.38	60.5
3.00	76.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the sides of the case.
4. Unless otherwise specified, tolerance is ±.02 (0.5 mm) for two place decimals.

FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary (1-2). 57.5 voltamperes, 115 V rms, 400 Hz.

Secondary (3-4): 115 V rms, .50 ampere rms.

Working voltage:

(1-2): 165 V rms.

(3-4): 165 V rms.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals: Turret type.

Height: .375 inch, maximum.

Diameter: .188 inch ±.015.

Weight: 4 pounds, maximum.

Operating temperature range: -55°C to +155°C.

Altitude: 10,000 feet.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (each winding): MIL-STD-202, method 301.

At sea level: 500 V rms.

Electrical characteristics:

No load: With 115 V rms and 400 Hz across (1-2) current in (1-2) shall be .06 ampere rms, and power in (1-2) shall not exceed 8 watts; voltage across (3-4) shall be 122 V rms ±5 percent.

Rated load: With 115 V rms and 400 Hz in (1-2), and rated current in secondary, the voltage across (3-4) shall be 115 V rms ±2 percent.

DC resistance:

Ⓑ (1-2). 2.5 ohms, maximum.

Ⓑ (3-4): 3.0 ohms, maximum.

Polarity: Additive, with terminals 2 and 3 connected.

Temperature rise: 55°C with 115 V rms, 400 Hz across (1-2) at an ambient temperature of 100°C, full load terminals (3-4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): MIL-STD-202, method 213, test condition I.

Marking location: See figure 1.

Part number: M27/269-01.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project - 5950-0646-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:59Z
Check the source to verify that this is the current version before use.