INCH-POUND

A-A-59923
6 June 2013

COMMERCIAL ITEM DESCRIPTION

BARBED TAPE, HELICAL (WIRE REINFORCED LONG BARB)

The General Services Administration has authorized the use of this Commercial Item Description for all Federal Agencies.

1. SCOPE. This Commercial Item Description (CID) covers helical barb tape for barb tape entanglements. These entanglements may serve as a security barrier for warehousing, manufacturing, parking lots, storage and other low level security applications.

2. SALIENT CHARACTERISTICS.

2.1 Material. The helical barbed tape shall be made of material as specified below and shall be subject to all provisions of this CID:

a. Barbed tape – Stainless steel per ASTM A240/A240M, Type 430 or galvanized steel per ASTM A653/A653M.
b. Core wire – Stainless steel per ASTM A580/A580M, 300 Series, minimum tensile strength 140,000 psi or galvanized steel per ASTM A764, Finish 2, Class II, Type B minimum tensile strength 220,000 psi.

2.2 Design and construction. Helical barbed tape furnished under this CID shall conform to the dimensions and design characteristics as specified herein, in Figure 1 and in Table I. Single coil wire reinforced 18 and 24 inch in diameter are to be fabricated from 0.025 inch thick AISI 430 stainless steel (SS) or ASTM A653/A653M galvanized steel (GA). Each roll shall consist of 33 coil loops with 4 needle sharp barbs located 4 inch on center along the spiral turns. The barb length shall be 2.250 to 2.600 inch tip to tip. Wire reinforced helical coils are to be available in combinations of SS or GA clinched 230 degrees around 0.098 inch diameter SS or GA core wire. Tape material (barb) shall be fabricated from SS or GA and is 1 inch wide prior to forming.

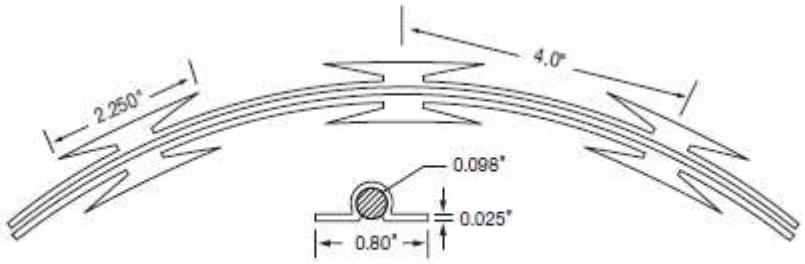


FIGURE 1. BARBED TAPE.

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Philadelphia, ATTN: DSCP-NASA, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or e-mail to dscpg&ispecomments@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

ASMC N/A FSC 5660

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Numbers and Design Characteristics.

Dash No.	Description	Dia. inch	Coil Loops	Strip Material	Core Wire	Coil Spacing inch	Yield feet	Pkg.	ASTM F 1910 Item #
1	Helical Single Coil	18	33	SS	GA	18	50	5/box	#2
2	Helical Single Coil	18	33	GA	GA	18	50	5/box	#2
3	Helical Single Coil	18	33	SS	SS	18	50	5/box	#1
4	Helical Single Coil	24	33	SS	GA	18	50	5/box	#6
5	Helical Single Coil	24	33	GA	GA	18	50	5/box	#6
6	Helical Single Coil	24	33	SS	SS	18	50	5/box	#5

3. REGULATORY REQUIREMENTS.

3.1 The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. PRODUCT CONFORMANCE PROVISIONS.

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and the quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5. PACKAGING.

5.1 Preservation, packing and marking shall be as specified in the contract or order.


6. NOTES.

6.1 Unless otherwise specified, all dimensions are in inches.

6.2 Unless otherwise specified in the contract or purchase order, packaging shall be in accordance with ASTM D3951.

6.3 The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractors. The part number identification number (PIN) shall consist of the basic commercial item description number followed by a dash number from Table I.

Example: AA59923 - 6



6.4 Source of documents.

6.4.1 FAR. The FAR may be obtained from the Regulatory Secretariat, 1800 F Street NW, Washington DC 20405 or online at http://www.acqnet.gov.

6.4.2 ASTM Standards. Copies of ASTM standards may be obtained from the ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or online at http://www.astm.org.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.

6.5 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.
b. Product conformance provisions.
c. Packaging requirements.

6.6 Key words.

Coil loops
Entanglements
Security Barrier

MILITARY ACTIVITIES:

Custodians:
Army – AT
Navy – YD
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Preparing activity:
DLA – IS

(Project 5660-2013-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.