MIL-E-1/1329(SigC)
AMENDMENT-3
8 August 1966
SUPERSEDING
AMENDMENT-2
1 December 1960

INDIVIDUAL MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MAGNETRON, PULSE
TYPE 7521

This Amendment forms a part of Individual Military Specification Sheet MIL-E-1/1329(SigC), 14 January 1960.

Page 1, Requirements Table, item Ref. 3.1: Replace with the following two listings in respective columns of the table:

"3.2	Qualification	Not required; (Note 21)	---	---	---	---
3.7	Marking	(Note 22)	---	---	---	--- "

Page 2, Requirements table, Tuner Drive Torque test: In Conditions column, replace "T = 55°C to 85°C (Approx) Note 12" with: "T = -55° to +85°C; (Note 12)".

Page 3, Requirements table, High Temperature Operation test: In the last 4 columns, insert the following data, respectively:

" MP --- 0.5 %"

FSC-5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:29Z
Check the source to verify that this is the current version before use.

Page 5, Note 21: Replace with the following:

"Note 21. The Preproduction Sample Approval requirements in U. S. Army Electronics Command Drawing SC-A-46600B hereby replace any Qualification requirements referable to the product covered herein. However, the requirements of paragraphs 3.1.2.1, 3.1.2.2, 3.1.3, and 4.4 in Drawing SC-A-46600B shall be considered not applicable to the product covered herein.

(Copies of U. S. Army Electronics Command Drawing SC-A-46600B, 19 March 1965, "Preproduction Sample Approval In Lieu Of Qualification Requirements In Specifications For Semiconductor Devices And Electron Tubes" may be obtained from the procuring activity or as directed by the contracting officer.)"

Page 6, Note 22: Replace with the following:

"Note 22. Product-identification marking shall be in accordance with Specification MIL-E-1. If any specification waiver has been granted, the product-identification marking shall consist of the tube-type designation only."

Page 7, Figure 1: Replace with new Figure 1, attached.

Page 8, Caption: Replace with the following:

"Electron Tube Type 7521
Fig. 1 Legend Notes"

Page 8, Note 4: Replace with the following:

"4. AN-UG 290A/U BNC panel jack."

Page 8, Note 9: Replace ".1390 Max" with: ".140 Max".

Custodian:
Army-EL

Preparing activity:
Army-EL

Project No. 5960-A625

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:29Z
Check the source to verify that this is the current version before use.

Dimensions				
Dimension	Min	Bogey	Max	
A			1.640	
B		.640		
C			.360	
D	.790		.850	
E			2.500	
F			.225	
G			1.450	
H	1.213		1.223	
J			3.265	
K			.200	
L	1.275		1.285	
M			1.475	
N		.212		
P		.6875		
Q			1.843	
R		.802		
S	.245		.255	
T		.040		
U		.070		
V		.750		
W			1.093	
X			2.405	
Y			.650 Dia	

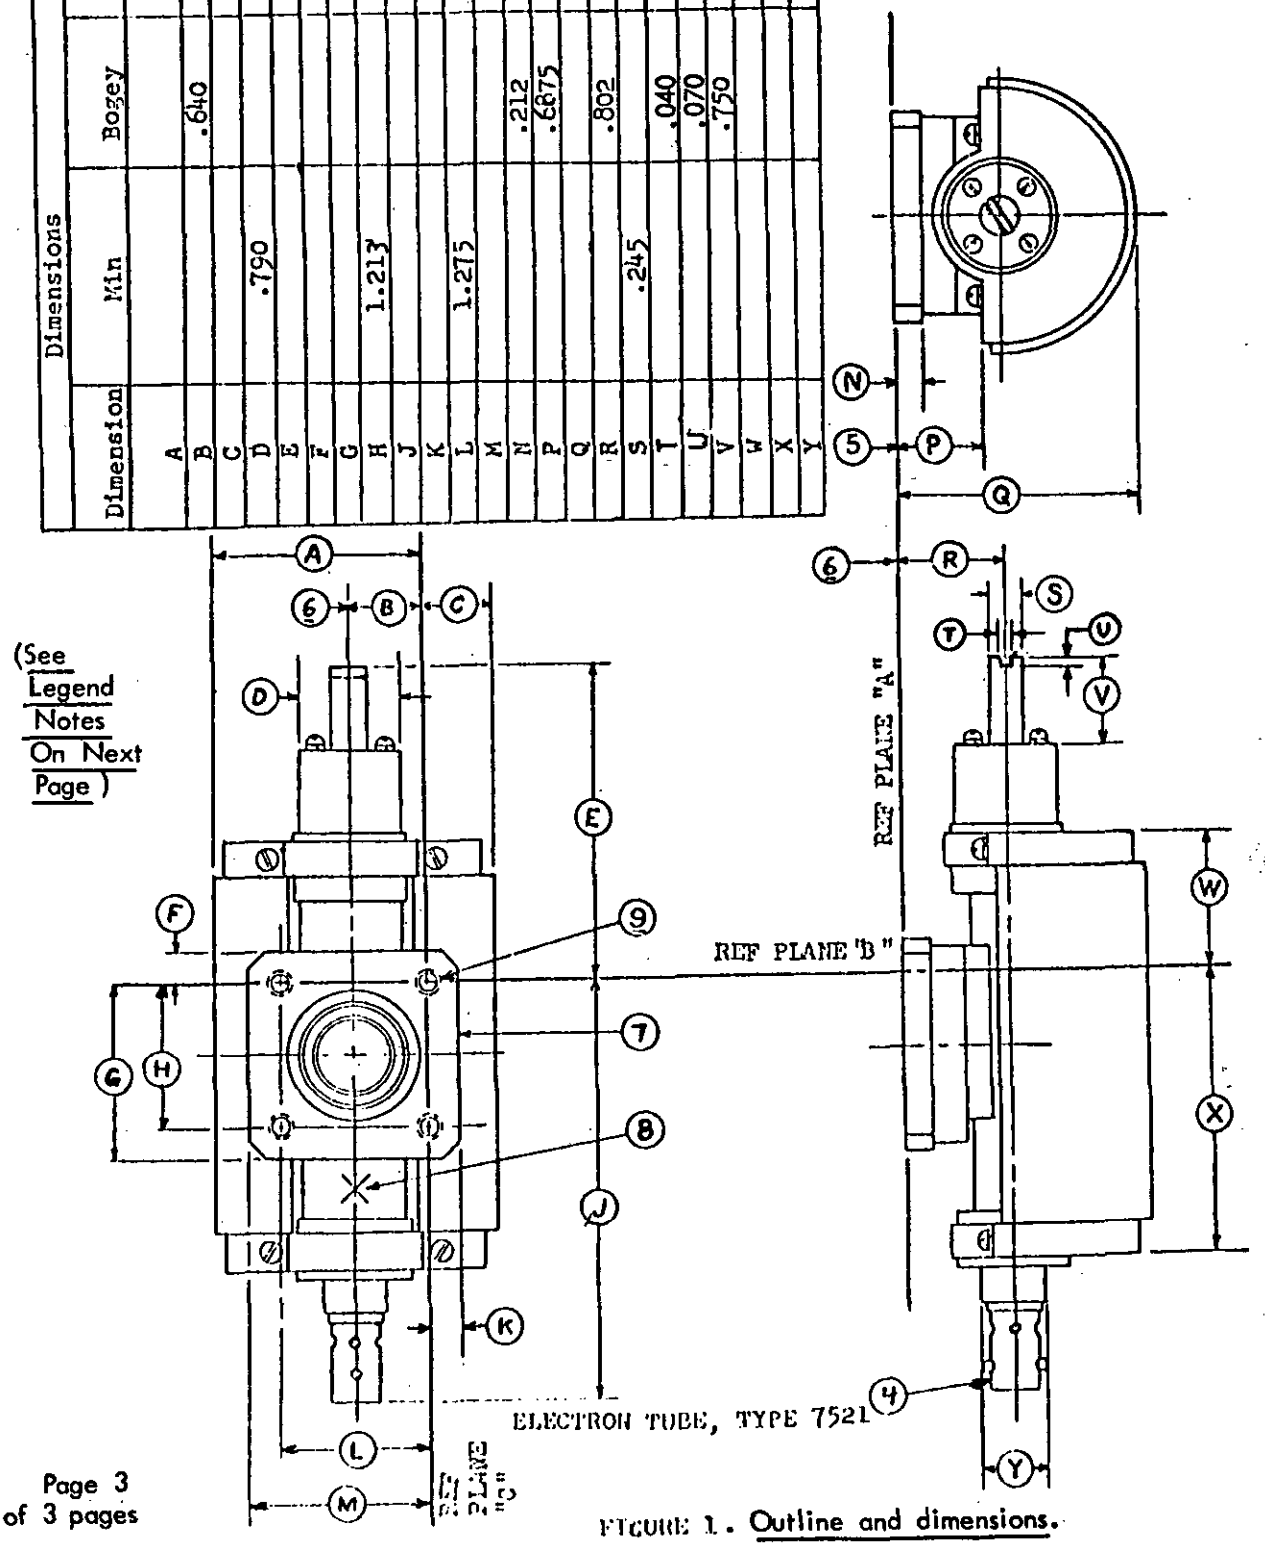


FIGURE 1. Outline and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:29Z
Check the source to verify that this is the current version before use.