This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
ARMY - MI, AR
USAF - 99
DLA - IS

USER SYMBOLS:
ARMY - ER, CR

P.A. NAVY — AS
Other Cust
USAF - 11
ARMY - AV

PROCUREMENT SPECIFICATION
MIL-N-25027

SUPERSEDES:

TITLE
NUT, SELF-LOCKING, 450°F, HEXAGON, REDUCED HEAD HEIGHT, RING BASE, CORROSION RESISTANT STEEL

MILITARY STANDARD
MS14222

SHEET 1 OF 2

DD FORM 1 MAY 72 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 5310-1206

PLATE NO. 13006

FED. SUP CLASS
5310

DESIGN OF WRENCHING PAD FACES BETWEEN WRENCHING CORNERS ARE OPTIONAL IF THE WRENCHING CORNERS ARE WITHIN THE LIMITS OF E, W, AND C, AND THE LIMIT OF THE AREA BETWEEN THE CORNERS IS WITHIN THE MAXIMUM LIMIT OF W FOR THE "E" LENGTH OF WRENCHING CORNERS

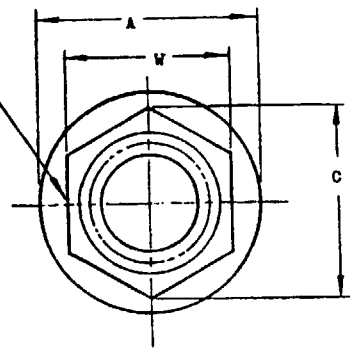

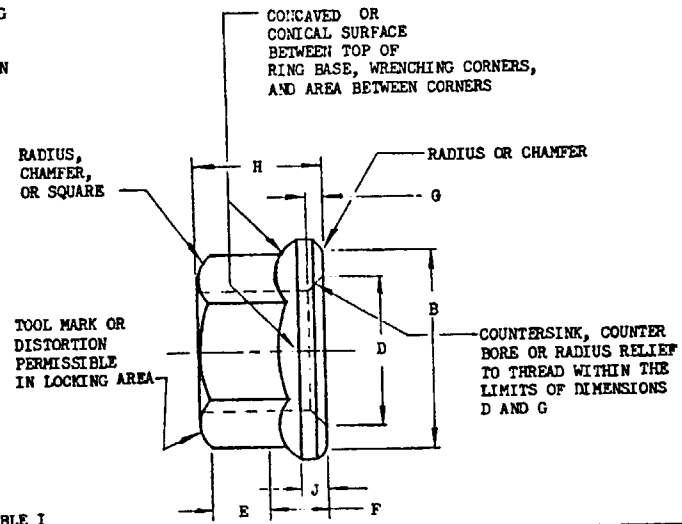


TABLE I

SIZE DASH NO	(a) THREAD	A MAX	B MIN	C MIN	D MAX	D MIN	(d) E MIN	(e) F MIN	G MAX	G MIN	H MAX	H MIN	J MIN	(c) W MAX	W MIN	(b) X	(f) WRENCHING TORQUE IN LBS	(g) AXIAL STRENGTH LBS MIN	WT LBS/100 MAX
04	4-40UNJC-3B	.206	.176	.171	.142	.112	.050	.028	.027	.005	.125	.103	.010	.158	.150	.003	11	755	.050
06	6-32UNJC-3B	.244	.214	.207	.168	.138	.055	.039	.031	.006	.141	.115	.010	.190	.181	.003	17	1,136	.080
08	8-32UNJC-3B	.290	.260	.244	.194	.164	.060	.041	.031	.006	.188	.125	.015	.221	.213	.003	23	1,720	.150
3	10-32UNJF-3B	.330	.290	.277	.220	.190	.065	.043	.031	.006	.188	.154	.015	.252	.243	.003	46	2,460	.180
4	1/4-28UNJF-3B	.420	.386	.347	.280	.250	.090	.057	.036	.007	.219	.204	.019	.316	.304	.003	115	4,580	.350
5	5/16-24UNJF-3B	.520	.482	.419	.342	.312	.120	.077	.042	.008	.266	.251	.023	.378	.367	.004	260	7,390	.600
6	3/8 -24UNJF-3B	.620	.575	.491	.405	.375	.125	.089	.042	.008	.282	.267	.030	.440	.430	.004	450	11,450	.800

(a) THREADS PER MIL-S-8879.

(b) BEARING SURFACE SHALL BE SQUARE WITH PITCH DIAMETER WITHIN "X" WHEN MEASURED IN ACCORDANCE WITH MIL-N-25027.

(c) DIMENSIONS ACROSS FLATS INCLUDE DEFORMATION OF SELF-LOCKING ELEMENT.

(d) MINIMUM LENGTH OF EACH WRENCHING CORNER.

(e) MINIMUM DISTANCE FROM THE WASHER FACE OF THE NUT TO THE BEGINNING OF THE MINIMUM LENGTH OF "E" OF EACH WRENCHING CORNER.

(f) NUTS SHALL BE TESTED FOR WRENCHING TORQUE BY USING A BOX OR SOCKET WRENCH.

(g) TEST BOLTS SHALL BE 180,000 PSI MINIMUM.

APPROVED 27 SEPT 84 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:37Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
ARMY - ER,CR

REVIEWER SYMBOLS:
ARMY - MI, AR
USAF - 99
DLA - IS

FED. SUP CLASS
5310

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL PER AMS 5525 (A286) OR AMS 5732.

2. FINISH: CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2.
DRY FILM LUBRICANT PER MIL-L-8937.

3. MAGNETIC PERMEABILITY: SHALL BE LESS THAN 2.0 (AIR = 1.0) FOR A FIELD STRENGTH = 200 OERSTEDS USING A MAGNETIC PERMEABILITY INDICATOR PER MIL-I-17214.

4. SURFACE TEXTURE: SURFACE ROUGHNESS SHALL BE NOT GREATER THAN 125 MICROINCHES IN ACCORDANCE WITH ANSI B46.1.

5. SURFACE TREATMENT: PASSIVATE PER QQ-P-35.

NOTES:

1. REMOVE ALL SHARP EDGES AND BURRS.

2. DIMENSIONS IN INCHES.

3. DESIGN AND LIMITATIONS SHALL BE IN ACCORDANCE WITH MS33588.

4. EXAMPLE OF PART NUMBER:

MS14222 -4 = 1/4-28UNJF-3B

- MS14222 — BASIC MS NUMBER
- -4 — SIZE DASH NO.
- 1/4-28UNJF-3B

5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 27 SEPT 84 REVISED

P.A. NAVY — AS Other Cust USAF - 11 ARMY - AV	TITLE NUT, SELF-LOCKING, 450°F, HEXAGON, REDUCED HEAD HEIGHT, RING BASE, CORROSION RESISTANT STEEL	MILITARY STANDARD MS14222
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:37Z
Check the source to verify that this is the current version before use.