
FED. SUP CLASS
6240

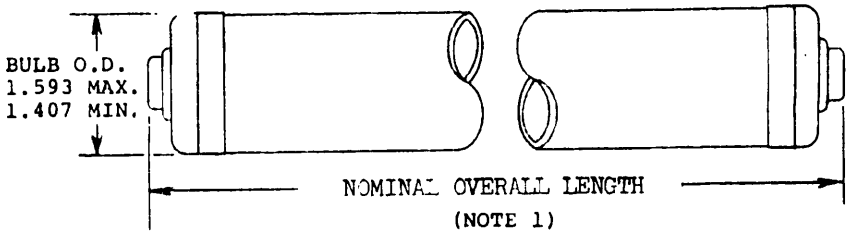

Metric equivalents

Inches	Centimeters (CM)
1.407	3.57
1.593	4.05
48.00	121.92

MS part number	Industry number	Watts	Nominal overall length (inches)	Hours life (approx)	Initial lumen output	National stock number
MS18226-1	F48T12/ CW/HO/HT	60	48	12000	4300	6240-00-933-5075
MS18226-2	F48T12/ SR/HO/HT	60	48	9000	2600	Not yet assigned

NOTES:
1. The nominal overall length includes the proper allowance for standard lampholders.
2. Initial lumen output and wattage values shown apply to lamps which are fully stabilized, for example when lamps are burned undisturbed for about 100 hours when new.
3. These lamps are used as follows:
   MS18226-1 in Symbols 74 and 74.1 of MIL-F-16377/13
   MS18226-2 in Symbols 75 and 75.1 Of MIL-F-16377/13
4. Lamps shall be designed so that light output peaks at nominal ambient temperature of 65 degrees celsius.
5. Dimensions are in inches. Metric dimensions are shown for information only.
6. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal.

(B) ENTIRE STANDARD REVISED

Project 6240-N306

APPROVED 14 July 1966 REVISED (A) 15 March 1967 (B) 1 March 1976

This Military Standard is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

P.A. SH Other Cust	TITLE LAMPS, FLUORESCENT, T-12, HIGH OUTPUT-HIGH TEMPERATURE, BASE RECESSED, DOUBLE CONTACT	MILITARY STANDARD MS18226(SHIPS)
Procurement Specification	SUPERSEDES	SHEET 1 OF 1

DD FORM 672N (SEP 67) LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.