

FED. SUP CLASS
1660

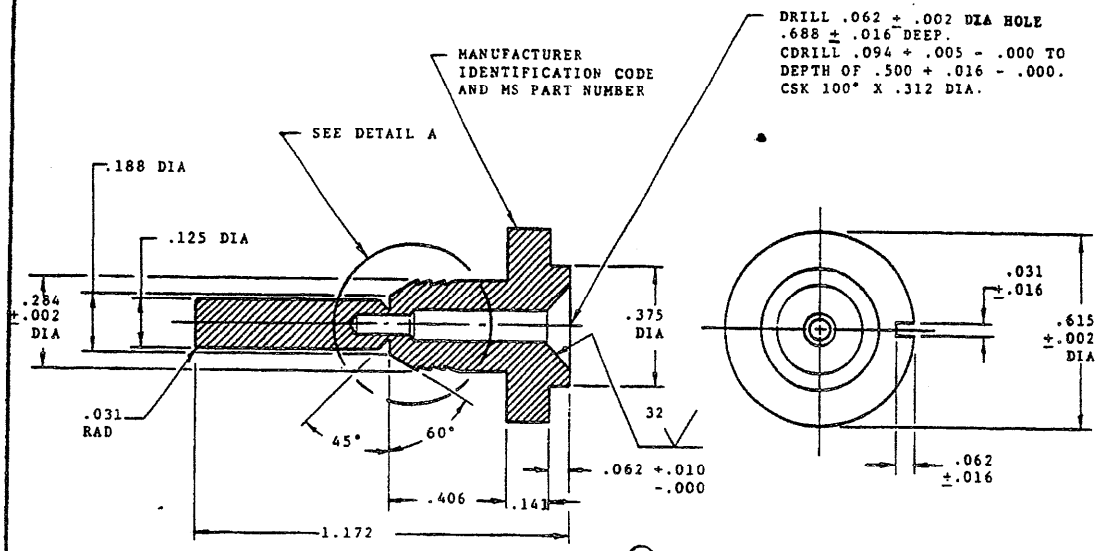

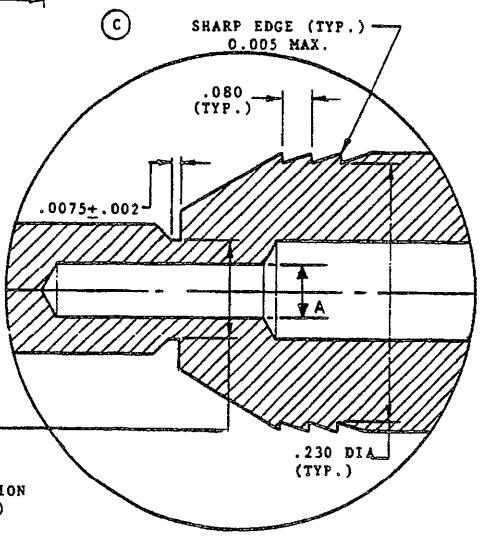

DASH NO.
-1

.094 ± .002 DIA.
LOCATE AT TRUE POSITION
WITHIN .004 TIR IN RELATION
TO .062 DIA. (SEE DIA. A)

DETAIL A

MATERIAL: BRASS CONFORMING TO QQ-B-626, ALLOY 360, HALF HARD.

FINISH: ALL SURFACES 125 UNLESS OTHERWISE NOTED IN ACCORDANCE WITH ANSI B46.1.

PART MUST BE STRESS ANNEALED WITHIN 25 HRS AFTER FIRST OPERATION TO MEET FRACTURE REQUIREMENT.

REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005: ANGLES ±1°.

FOR DESIGN FEATURE PURPOSES. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 16 Nov 65 REVISED (A) 16 May 1972 (B) 26 JULY 1973 (C) 5 JAN 1978

REVIEW ACTIVITIES:
ARMY - AV-GL
NAVY - AS
AIR FORCE - 99

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 99 Other Cust NAVY - AS ARMY - AV	TITLE NIPPLE, BREAK OFF, EMERGENCY OXYGEN CYLINDER VALVE	MILITARY STANDARD MS 21965
PROCUREMENT SPECIFICATION MIL-V-7560	SUPERSEDES: USAF DWG 43A25029	SHEET 1 OF 1

DD FORM 1 SEP 63 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:42Z
Check the source to verify that this is the current version before use.