
FED. SUP CLASS
5305

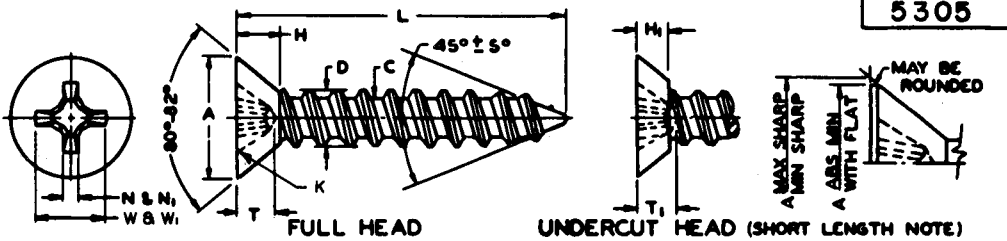

FULL HEAD — UNDERCUT HEAD (SHORT LENGTH NOTE)

NOMINAL SIZE			4 (.112)	6 (.138)	8 (.164)	10 (.190)	12 (.216)	14 (.242)
THREADS PER INCH			24	18 / 20*	15 / 18*	12 / 16*	11	10
MAJOR DIAMETER	D	MAX	.114	.141	.168	.194	.221	.254
		MIN	.110	.136	.162	.188	.215	.248
MINOR DIAMETER	C	MAX	.083	.102	.123	.133	.162	.185
		MIN	.078	.096	.116	.126	.155	.178
HEAD DIAMETER	A	MAX SHARP	.225	.279	.332	.385	.438	.491
		MIN SHARP	.207	.257	.308	.359	.410	.461
		ABS MIN	.195	.244	.292	.340	.389	.437
FULL HEAD	HEAD HEIGHT H	REF	.067	.083	.100	.116	.132	.148
	RECESS DIAMETER W	MAX	.128	.174	.189	.204	.268	.283
		MIN	.115	.161	.176	.191	.255	.270
	RECESS DEPTH T	MAX	.089	.106	.121	.136	.156	.171
		MIN	.073	.083	.098	.113	.133	.148
	RECESS WIDTH N	MIN	.018	.029	.031	.032	.035	.036
	DEPTH OF GAGE PENETRATION	MAX	.082	.095	.110	.125	.139	.154
		MIN	.066	.072	.087	.102	.116	.131
UNDER CUT HEAD	HEAD HEIGHT H_1	MAX	.047	.059	.070	.081	.092	.104
		MIN	.038	.048	.058	.068	.078	.088
	RECESS DIAMETER W_1	MAX	.116	.149	.174	.189	.233	.250
		MIN	.103	.136	.161	.176	.220	.237
	RECESS DEPTH T_1	MAX	.078	.078	.106	.121	.121	.136
		MIN	.062	.055	.083	.098	.101	.116
	RECESS WIDTH N_1	MIN	.018	.025	.029	.031	.030	.032
	DEPTH OF GAGE PENETRATION	MAX	.071	.064	.095	.110	.104	.119
		MIN	.055	.041	.072	.087	.081	.096
RADIUS		K	.020	.025	.025	.025	.030	.030
DRIVER SIZE			1	2	2	2	3	3

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/4	± 1/32	-1-					
5/16			-12-				
3/8		3	13	-24-	35		
1/2		4	14	25	-36-		
5/8		5	15	26	37		
3/4		6	16	27	38	49	60
7/8			17	28	39	50	61
1			18	29	40	51	62
1-1/4	± 3/64			30	41	52	63
1-1/2				31	42	53	64
1-3/4					43		65
2					44		66

MATERIAL: Steel, corrosion resisting, in accordance with Federal Standard No. 66, Steel Nos. 410 or 420 (Hardened).
FINISH: Passivated.
THREADS: Thread types to be in accordance with applicable requirements of procurement specification.
RECESS: Except for dimensions W, T, N, K and Depth of Gage Penetration the recess shall be in accordance with MS 9006.
*SHORT LENGTHS: Lengths above dotted line have fine pitch threads and undercut heads as indicated.(Size 4 undercut head only)
HOLE SIZES: For approximate hole sizes see MS 24631.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS24616-1.
NOTES: (1) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(2) Referenced documents shall be of the issue in effect on date of invitations for bid.

(B) CANCELLED - SEE SHEET 2

(B) FOR CHANGES SEE SHEETS 1 & 2

APPROVED 5 Oct 59 — REVISED (A) 25 Feb 1963 (B) 27 AUG 1969

NOTICE - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for all new engineering and design applications, and for revising, must be made from this document.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust	SCREW, TAPPING-THREAD FORMING, TYPE A, FLAT 82° COUNTERSUNK HEAD, CROSS RECESSED, CORROSION RESISTING STEEL	MS 24616
SH 82		
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES: MS 24616	SHEET OF 2

DD FORM 672-1 (Coordinated) * PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

The screws covered by the following dash numbers listed in MS 24636 are cancelled after 25 Feb 1963. Use the dash numbers given in Sheet 1. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and engineering. Replacement shall be in accordance with the table below.

CROSS REFERENCE	
CANCELLED	SUPERSEDED BY
MS 24636	MS 24616
DASH NO.	DASH NO.
1	1
2	3
3	4
4	5
5	6
10	13
11	14
12	15
13	16
14	17
15	18
21	24
22	25
23	26
24	27
25	28
26	29
27	30
28	31
32	35
33	36
34	37
35	38
36	39
37	40
38	41
39	42
40	43
41	44
46	49
47	50
48	51
49	52
50	53
57	60
58	61
59	62
60	63
61	64
62	65
63	66

(B) CANCELLED AFTER 27 AUG 1969
USE MS51862.

FOR INTERCHANGEABILITY RELATIONSHIP
SEE MS51862.

APPROVED 5 Oct 59 REVISED (A) 25 Feb 1963 (B) FOR CHANGES SEE SHEETS 1 & 2.

P.A. WC Other Cust SH 82	TITLE SCREW, TAPPING-THREAD FORMING, TYPE A, FLAT 82° COUNTERSUNK HEAD, CROSS RECESSED, CORROSION RESISTING STEEL	MILITARY STANDARD MS 24616
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES: MS 24636	SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2022-10-23 14:58Z
Check the source to verify that this is the current version before use.