
FED. SUP CLASS
5950

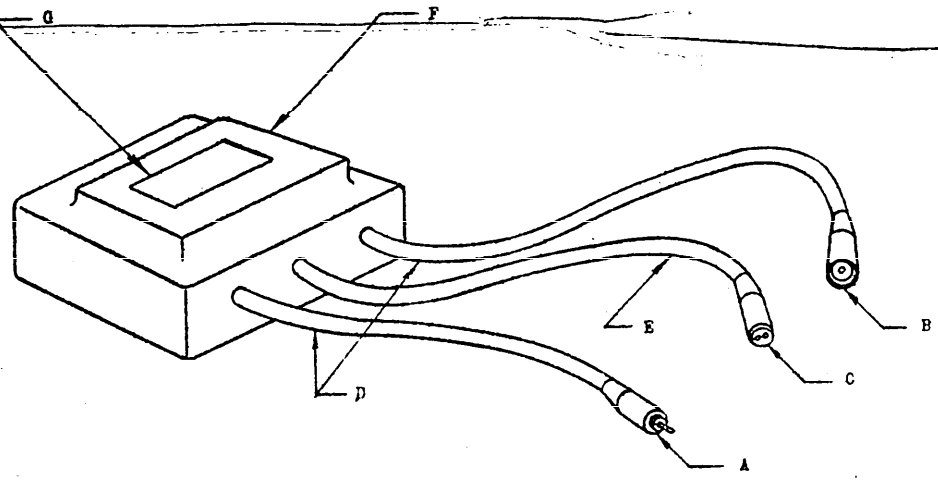

ELECTRICAL CHARACTERISTICS					
PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS (B)	LOAD (B)
20	95	80		6.53-6.67	1.1 OHMS (a)
~~20~~	~~94~~	~~78~~		~~6.53-6.67~~	~~0.8 OHMS (30W LAMP PLUS LOSSES)~~
20				6.6 -7.1	SHORT CIRCUITED
20			25	0	OPEN CIRCUITED
15.8				5.1 -5.4	0.9 OHMS (a)
12.4				4.0 -4.3	0.7 OHMS (a)
10.3				3.3 -3.6	0.6 OHMS (a)
8.5				2.7 -3.0	0.5 OHMS (a)

(a) THE LOAD MAY BE EITHER A 45W, 6.6A LAMP OR THE OHMIC RESISTANCE SPECIFIED.

A PLUG FIGURE 6a FAA SPECIFICATION L-823.
B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823.
C RECEPTACLE FIGURE 1c FAA SPECIFICATION L-823.
D PRIMARY CABLE.
E SECONDARY CABLE.
F CASE.
G IDENTIFICATION MARKING (LOCATION OPTIONAL).

PART NO.	LEAD LENGTH INCHES	
	D	E
MS27137-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES.

MAXIMUM WEIGHT 10 POUNDS.

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 Jul 63 REVISED (A) 15 May 64 (B) 18 Aug 65

Review activities: USAF - 85,11
Navy - WP

This standard has been approved by the DOD (Department of the Air Force) and the Department of the Navy and is mandatory for use by activity. All other military activities are required employ this standard where suitable.

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cust Navy - WP	TRANSFORMER, POWER, ISOLATION, AIRPORT LIGHTING, 30-45W/20A/6.6A/5000V	MS27137(ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES: MS27137(USAF)	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.